

**Pins can be trimmed (If too tall)**

VIN

VIN2


CONSOLE\_TX\_OUT

CONSOLE\_RX\_IN

J8

GND

Unused Connector  
(to tap voltages/Test voltages)



Populated (chip is "on" —  
when ON/OFF pin is grounded;  
can also order the opposite  
state chip and remove resistor)

**Jumper NOT installed**  
Install to run everything on one 24V supply

## TurboPump

RGA

## Roughing Pump Power Switch

**Roughing Pump**  
(can be turned

**Molex**  
**Microfit3.0 3x1 M**

**Custom  
CFP Fluid Pump  
12V**

**Molex Microfit3.0 4x1 M**

43650-0400

PH Probe

5v power (Linear Regulator)

3.3v signal

4  
3  
2  
1


MSO


J5


5V  
5V  
GND

**Boards have an Un-shown 3.3v power supply about Here - Fits in as a retrofit To supply 3.3V buffers for the pico below**

|        |        |             |
|--------|--------|-------------|
| Power  |        | 2024-09-10  |
|        |        | sam         |
| 100818 | v1.0.1 | Page 1 of 4 |

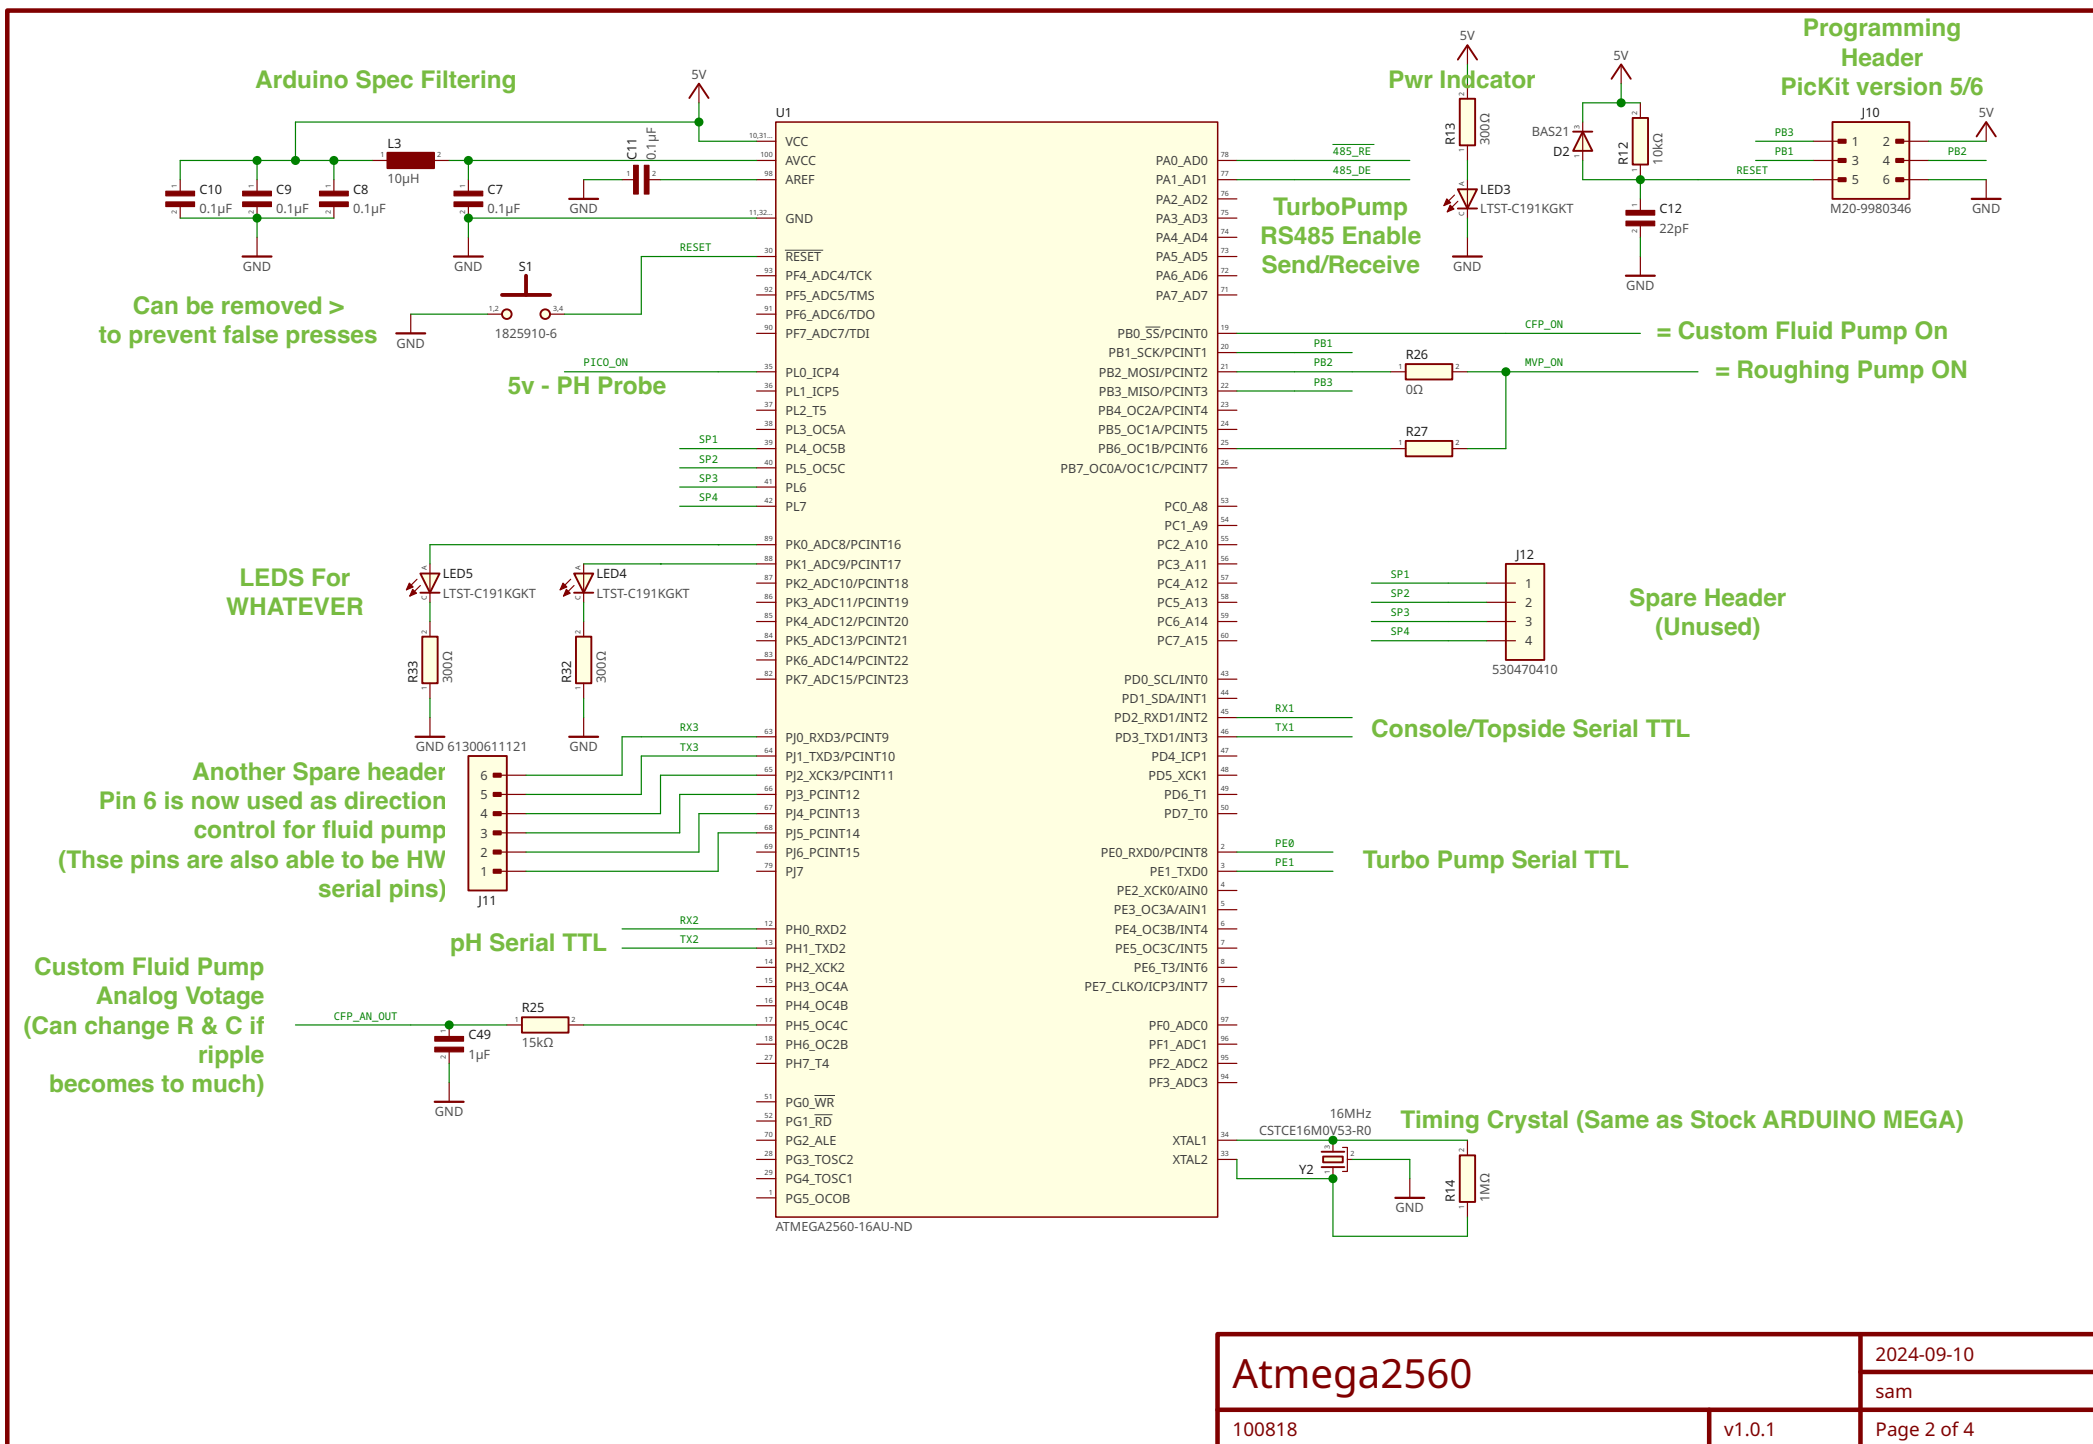

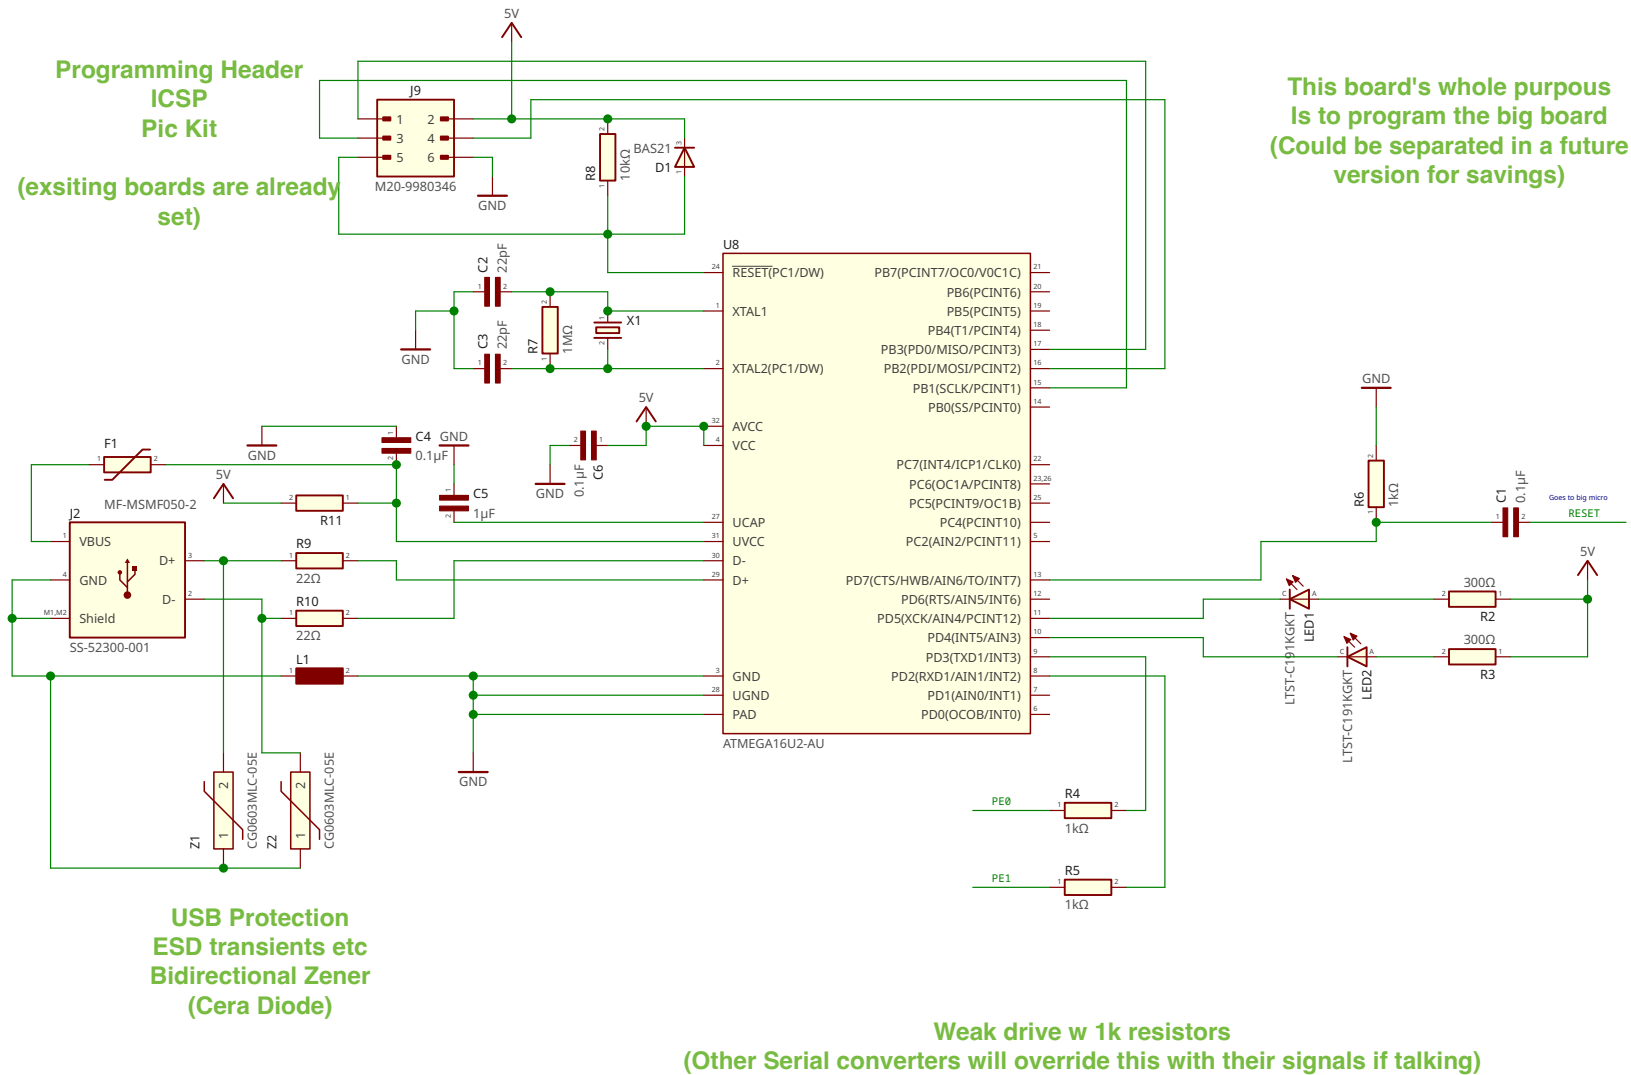

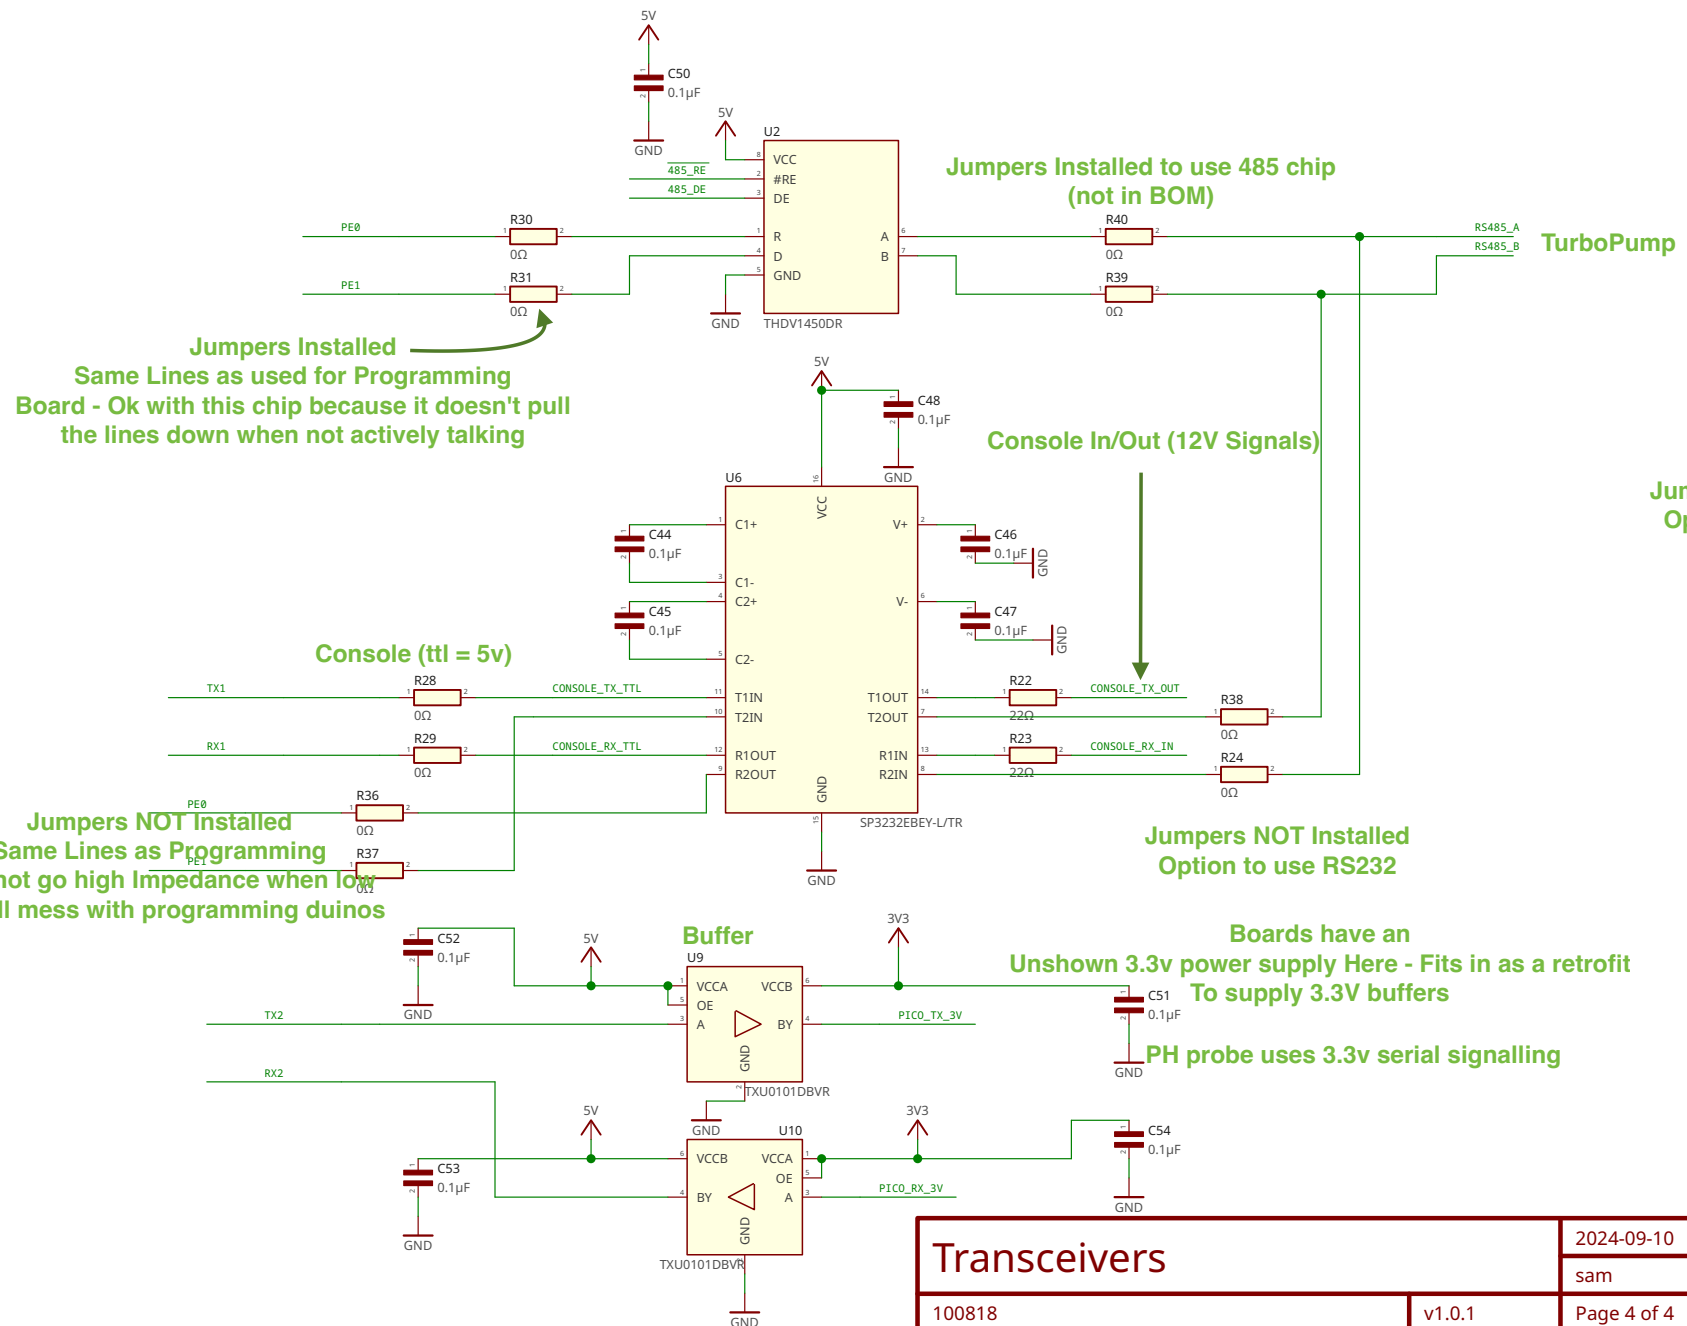

Jumpers NOT Installed  
Option to use RS232

|              |        |             |
|--------------|--------|-------------|
| Transceivers |        | 2024-09-10  |
|              |        | sam         |
| 100818       | v1.0.1 | Page 4 of 4 |