

## Service Conditions & Material Selector

Service Conditions

Operating Temperature 

Minimum

°C

Maximum

°C

Seal Material Selector

Polymer Group

Seal Hardness

Selected Compound

N0525-60



## Advanced Material Selector

Search within results

|  |
|--|
|  |
|--|

## SEARCH

## 1 Product Matches



Nitrile-Butadiene  
Rubber O-Ring, 60  
Shore A, Broad  
Applicability (Prädifa  
Series N0525-60)

Fluid Compatibility :

Select

[Go to Product Page](#)

1 Product Matches

### Size Selector

## Hardware Configuration

### Sealing Case ?

Axial - External Pressure 

### Application ?

Liquid 

☐ Thermal Expansion & Volume Swelling ?

Seal 

Groove

Seal max. volume swell ?

Group default


$\times 10^{-6}/K$

PP 

**×10<sup>-6</sup>/K**

0 %

Sizing Selection

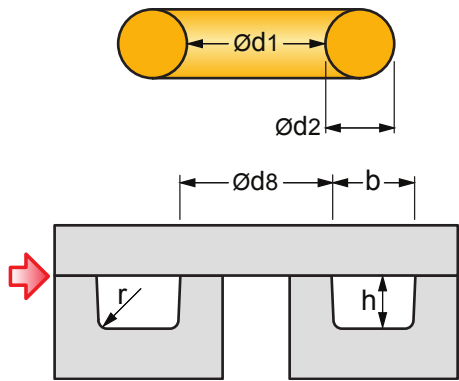

O-ring Size Code  Size Search ?

| OR  |                | Nominal                            | Tolerance    | Limit                                | Min                                | Max                                   |
|-----|----------------|------------------------------------|--------------|--------------------------------------|------------------------------------|---------------------------------------|
| Ød1 | Inner Diameter | <input type="text" value="7.938"/> | ISO 3601-1 B | ± <input type="text" value="0.170"/> | <input type="text" value="7.760"/> | <input type="text" value="8.110"/> mm |
| Ød2 | Cross section  | <input type="text" value="1.588"/> |              | ± <input type="text" value="0.080"/> | <input type="text" value="1.510"/> | <input type="text" value="1.670"/> mm |

| Groove |                | Nominal                            | Tolerance                          | Lower                               | Upper                              | Min                                | Max                                   |
|--------|----------------|------------------------------------|------------------------------------|-------------------------------------|------------------------------------|------------------------------------|---------------------------------------|
| Ød8    | Inner diameter | <input type="text" value="8.500"/> | <input type="text" value="h9"/> ↕  | <input type="text" value="-0.036"/> | <input type="text" value="0.000"/> | <input type="text" value="8.464"/> | <input type="text" value="8.500"/> mm |
| b      | Width          | <input type="text" value="1.500"/> | <input type="text" value="Rec"/> ↕ | <input type="text" value="0.000"/>  | <input type="text" value="0.200"/> | <input type="text" value="1.500"/> | <input type="text" value="1.700"/> mm |
| h      | Depth          | <input type="text" value="1.900"/> | <input type="text" value="Rec"/> ↕ | <input type="text" value="0.000"/>  | <input type="text" value="0.100"/> | <input type="text" value="1.900"/> | <input type="text" value="2.000"/> mm |
| r      | Radius         | <input type="text" value="1.000"/> | <input type="text" value="Rec"/> ↕ | <input type="text" value="-0.200"/> | <input type="text" value="0.200"/> | <input type="text" value="0.800"/> | <input type="text" value="1.200"/> mm |

Results

Recommended ⚠ Warning ⚡ Critical ?

| Results                   | Recommendation | Min                                  | Max                                  |   |
|---------------------------|----------------|--------------------------------------|--------------------------------------|---|
| Stretch of OR inner-ø ?   | 0 ... 6        | <input type="text" value="4.3"/>     | ⚠ <input type="text" value="9.5"/>   | % |
| Compression of OR Ød2 ?   | ...            | <input type="text" value="(-32.9)"/> | <input type="text" value="(-13.1)"/> | % |
| Gland fill ?              | 60 ... 90      | ⚠ <input type="text" value="53.9"/>  | ⚠ <input type="text" value="93.3"/>  | % |
| Total deformation force ? |                | <input type="text" value="0"/>       | <input type="text" value="0"/>       | N |

Add optional notes.

Notes ▼

Recommendations on application design and material selection are based on available technical data and are offered as suggestions only. Each user should make his own tests to determine the suitability for his own particular use. Parker offers no express or implied warranties concerning the form, fit, or function of a product in any application

DOWNLOAD PDF

GO TO PRODUCT PAGE