

Design and Collique an international kg, 19(b) 4/10/29 wing conseless router, DHCP somes. To design and configure on the return return return return the caterograms atte 1) Build a simple retrook is the logical topology workspace. step 1: Laurch cisco packet traces step 2: verfigure the topology. 2) Coffaire the Network derices stop 1: configure the wilders router step 2: Configure the laptop step 3: Carpique the PC. 3tep 4: Configure the intent cloud. Step 5: Configure the cisco. Cinner 3) Verify and checks for lovetimit Step: Refresh the IPY setting on the PC.

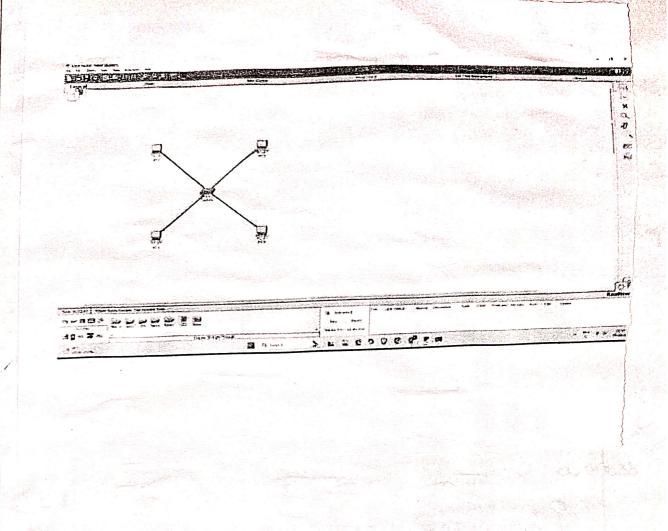

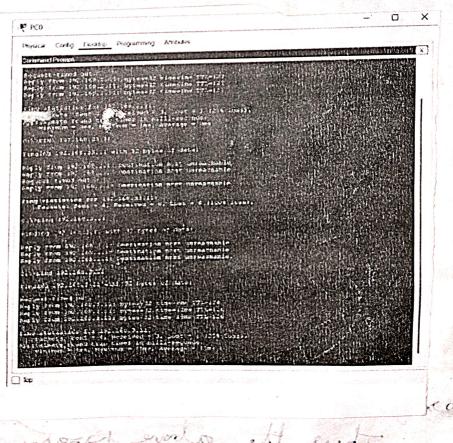

the the above propose is

I skews this are

GLOBAL		RIP Peuting	
Settings	I make a second community of	the state of the s	
Algorithm Settings	Network	Akl	- Andrewson or white
ROUTING	And the second section of the second section of the	AK)	
Static	Network Address		
RIP	The case		
SWITCHING	192 166 1.0		
VLAN Detabase	192 163 2 0		
INTERFACE	list was a		ii in ii
SigabitEthemetri/0	192 188 50		
@gabitEthemetfl/1			
Seria (07370)	11		
Serta10/3/1			
			200
			Herricare
-			Remove
uranieri KOS Commands			Я <i>н</i> етьсьич
	Lace Sizebilftharmt0/6		Remove
outer (contig-11)	face Significations 10/0		Remove
outer (config) inter	face Signification 1970		History
outer (confry) linter outer (confry = 15) l FYE-1-CONFIG_I: Con	figured from consula by co		Histown
outer (config) linter outer (config-17) f FYZ-1-CONTIG-1: Con outer (config-11) fer outer (config-11) for	offigured from consula by co		Restront
outer (confly) linter outer (confly=15) i frz-i-curru_1: com outer (confly=11) tex outer (confly finter outer (confly=11)	offigured from consula by constant of the cons		Remove
outer (config) linter outer (config-17) f FYZ-1-CONTIG-1: Con outer (config-11) fer outer (config-11) for	offigured from compula by continued from sectal 275/0		Rentown

Result:
Thus the above program is executed successfully.