Ex. NO: 11

Date: 30/9/20 Simulate static Routing configuration using cisco packet tracer.

AIM:

To simulate static Routing configuration using cisco packet tracer.

Introduction:

Static Routing was configured on Router 0, Router 1, and Router 2 using ip route commands. main and backup routes were configured using diffent administrative.

Router 0:

Router > enable.

Router # configure terminal.

Router (config)# ip route 30.0.0.0 255.0.0.0 20.0.0.2 10.

Router (config)# ip route 20.0.0.0 255.0.0.0 40.0.0.2 20.

Router (config)# ip route 30.0.0.100 255.255.255.255 40.0.0.2 10.

Router (config)# ip route 30.0.0.100 255.255.255.255 20.0.0.2 20

Router(config)# ip route 50.0.0.0 255.0.0.0 40.0.0.2 10.

Router (config)# ip route 50.0.0.0 255.0.0.0 20.0.0.2 20

Router (config)# : exit

Router # Show ip route static.

Router1:

Router > enable

Router # configure terminal.

Router (config)# ip route 10.0.0.0 255.0.0.0

20.0.0.1 10.

Router(config)# ip route 10.0.0.0 255.0.0.0 50.0.0.1

20.

Router(config)# exit.

Router # show ip route static.

Router 2:

Router > enable.

Router # configare terminal.

Router (config) # ip route 10.0.0.0 255.0.0.0 40.0.0.2

Router (config) # ip route 30.0.0.0 255.0.0.0 50.0.0.2

Router (config) # exit.

Router # Show ip route static

Verification:

PC > ping 30.0.0.100

PC > tracert 30.0.0.100.

TO check routing table.


Router # Show ip route static

Router 0 - Router 1 link and run:

PC > ping 30.0.0.100.

PC > tracert 30.0.0.100.

Simulate RIP using Cisco packet Tracer.

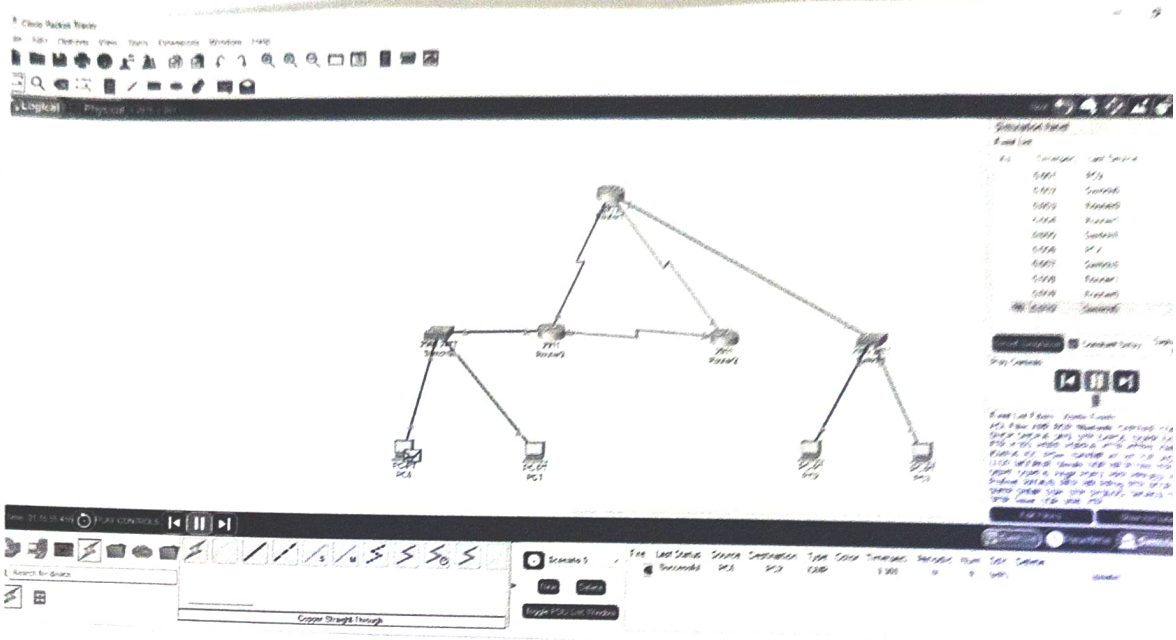

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 30.0.0.2

Pinging 30.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 30.0.0.2: bytes=32 time=8ms TTL=126
Reply from 30.0.0.2: bytes=32 time=9ms TTL=126
Reply from 30.0.0.2: bytes=32 time=10ms TTL=126

Ping statistics for 30.0.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 10ms, Average = 9ms

C:\>tracert 30.0.0.2

Tracing route to 30.0.0.2 over a maximum of 30 hops:

  1    1 ms      0 ms      0 ms      10.0.0.1
  2    6 ms      9 ms      9 ms      40.0.0.2
  3    0 ms      0 ms      0 ms      30.0.0.2

Trace complete.

C:\>tracert 30.0.0.100

Tracing route to 30.0.0.100 over a maximum of 30 hops:

  1    0 ms      0 ms      0 ms      10.0.0.1
  2    4 ms      2 ms      0 ms      20.0.0.2
  3    0 ms      *         0 ms      20.0.0.2
  4    *         0 ms      *         Request timed out.
  5    6 ms      *         0 ms      20.0.0.2
  6    *         6 ms      *         Request timed out.
  7    0 ms      *         9 ms      20.0.0.2
  8    *         9 ms      *         Request timed out.
  9    7 ms      *         1 ms      20.0.0.2
  10   *         9 ms      *         Request timed out.
  11   0 ms      *         9 ms      20.0.0.2
  12   *         0 ms      *         Request timed out.
  13   0 ms      *         0 ms      20.0.0.2
  14   *         0 ms
```

Result:

Static routes were configured successfully the routers selected. the router selected with lower AD as the main route and used the backup route when the main path failed.