Ex.No:9

Date: 28/9/20

Internetworking with routers in cisco packet tracer. simulator.

AIM:

Design and configure a simple internetwork using Router.

procedure:

1. Open cisco packet tracer create new workspace.
2. place the required Routers, Switches, and PC's in the network space and connect them. using appropriate cable.
3. Divide the network 192.168.1.0/24 into smaller subnet using the /27 subnet mask 255.255.255.224.
4. Assign Ip address to the router interface accrodig to respective subnets.
5. configure the routers using CLI:

Enable.
configure terminal.
interface GigabitEthernet 0/0.
ip address 192.168.1.1 255.255.255.224.
no shutdown.
exit

6. configure switch port access ports.

enable.

configure terminal.

interface fastEthernet 0/1

switchport mode access.


exit.

7. configure each PC with its IP address, subnet mask, and default gateway according to its subnet.

8. Repeat the IP configuration for the other subnets and connected devices.

9. open command prompt on the PC's and use the ping command to test connectivity between devices.

10. Verify that the packets are successfully transmitted between devices and confirm that the subnetted network is functions correctly.

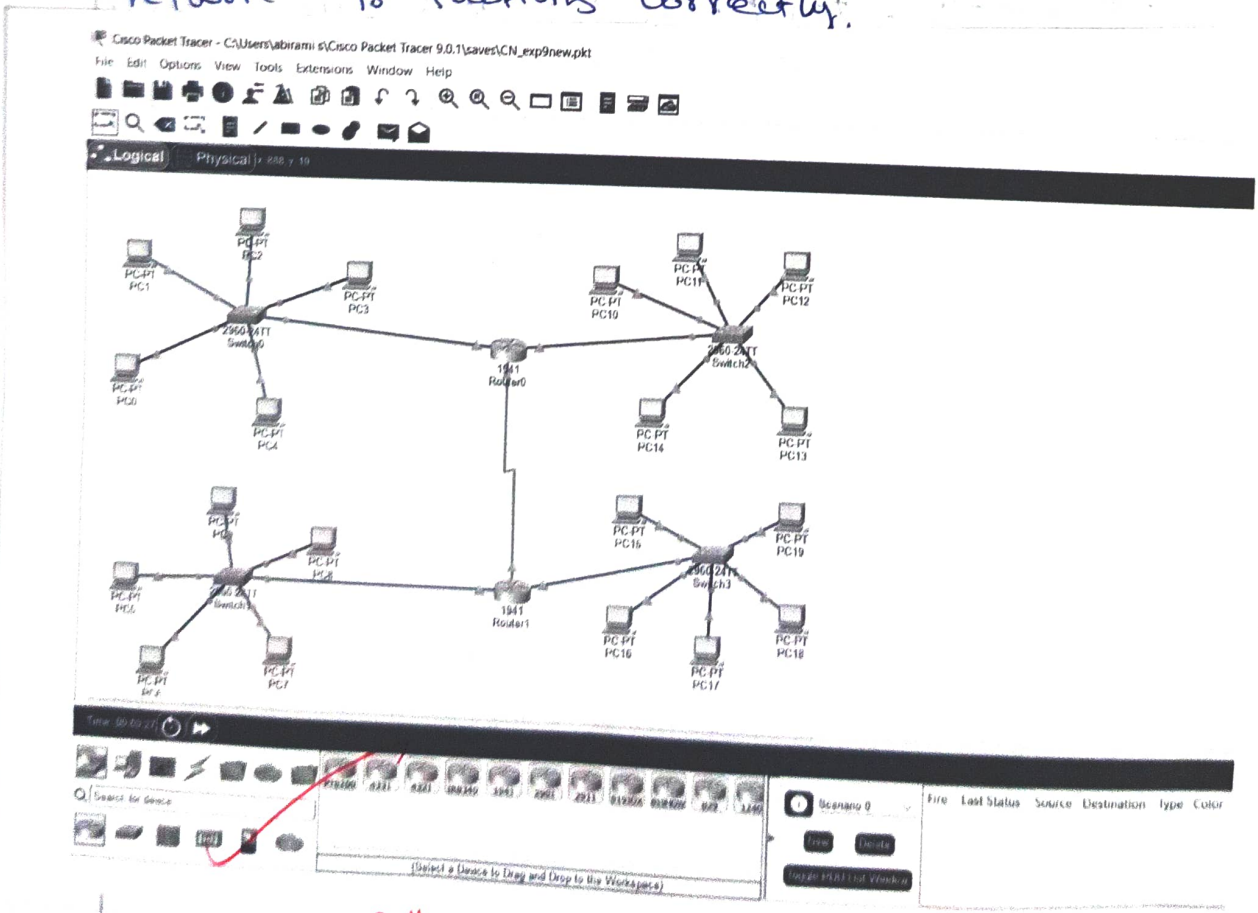

Result:

Hence, Designing and configuration sucessfully completed by using Router.