



**Connect Tech Inc.**  
Embedded Computing Experts

[www.connecttech.com](http://www.connecttech.com)

# USERS GUIDE

## COM Express® Type 10 Mini Carrier CCG022



### **Connect Tech Inc.**

42 Arrow Road  
Guelph, Ontario  
N1K 1S6

[www.connecttech.com](http://www.connecttech.com)

**Tel:** 519-836-1291  
**Toll:** 800-426-8979 (*North America only*)  
**Fax:** 519-836-4878  
**Email:** [sales@connecttech.com](mailto:sales@connecttech.com)  
[support@connecttech.com](mailto:support@connecttech.com)



## Table of Contents

<b>Table of Contents.....</b>	<b>1</b>
<b>Preface.....</b>	<b>4</b>
Disclaimer .....	4
Customer Support Overview .....	4
Contact Information .....	4
Limited Product Warranty.....	5
Copyright Notice .....	5
Trademark Acknowledgment .....	5
ESD Warning .....	6
<b>Revision History .....</b>	<b>6</b>
<b>Introduction.....</b>	<b>7</b>
Product Features and Specifications .....	7
Part Numbers / Ordering Information .....	8
<b>Product Overview .....</b>	<b>9</b>
CCG022 Block Diagram .....	9
Connector Summary & Locations .....	10
CCG022 Top View.....	10
CCG022 Bottom View .....	10
Jumper Summary.....	11
<b>Detailed Feature Pinouts and Functional Descriptions .....</b>	<b>12</b>
COM Express Module.....	12
Display Outputs .....	13
LVDS Video Connector .....	13
LVDS Backlight Power Connector .....	14
HDMI Video Connector .....	15
USB .....	16
USB 2.0 Port Connectors.....	16
USB 3.0/2.0 Port Connectors.....	16
10/100/1000 Ethernet (GBE) Connector .....	17
Software Support for the Intel 82574 .....	17
Serial .....	18
RS-232/485 Connector .....	18
RS-232/485 Jumper Configuration.....	19
J1 – RS-232/485 Jumper Block .....	19
Serial Line Modes.....	19
Examples .....	19
Audio.....	20
Software Support for the CS4207 .....	20
microSD Card Connector .....	21
mini PCIe & mSATA Slots .....	22
Dual Function mini PCIe mSATA Slots.....	22
Half and Full Length mini PCIe / mSATA module Installation .....	23
Standoff and Screw Assembly Details.....	23
CCG022 – External Hard Drive Installation.....	24
mini pcie / mSATA Connector Pinout.....	25
System Miscellaneous .....	26
System Connector.....	26
J2 – System Jumper Block.....	26
Input Power & Control .....	27



---

RTC Battery .....	27
<b>Typical Hardware Installation Procedure .....</b>	<b>28</b>
On-board Indicator LED .....	28
<b>Power Consumption and Thermals .....</b>	<b>29</b>
Current Consumption .....	29
Thermal Properties .....	30
<b>Mechanical Drawings &amp; Models .....</b>	<b>31</b>
<b>Cable Kits .....</b>	<b>32</b>
CCG022 Cable Kit - CKG044 – “Full” Cable Kit .....	32
<b>Appendix A – COM Express Signal/Pinout Connection Details .....</b>	<b>33</b>



## Preface

### Disclaimer

The information contained within this user's guide, including but not limited to any product specification, is subject to change without notice.

Connect Tech assumes no liability for any damages incurred directly or indirectly from any technical or typographical errors or omissions contained herein or for discrepancies between the product and the user's guide.

## Customer Support Overview

If you experience difficulties after reading the manual and/or using the product, contact the Connect Tech reseller from which you purchased the product. In most cases the reseller can help you with product installation and difficulties. In the event that the reseller is unable to resolve your problem, our highly qualified support staff can assist you. Our support section is available 24 hours a day, 7 days a week on our website at: <http://connecttech.com/support/>. See the contact information section below for more information on how to contact us directly. Our technical support is always free.

## Contact Information

### Mail/Courier

Connect Tech Inc.  
Technical Support  
42 Arrow Road  
Guelph, Ontario  
Canada N1K 1S6

### Email/Internet

[sales@connecttech.com](mailto:sales@connecttech.com)  
[support@connecttech.com](mailto:support@connecttech.com)  
[www.connecttech.com](http://www.connecttech.com)

### Note:

Please go to the [Resource Center](#) or the [Support Center](#) on the Connect Tech website for product manuals, installation guides, device driver software and technical tips.  
Submit your technical support questions to our customer support engineers via the [Support Center](#) on the Connect Tech website.

### Telephone/Facsimile

Technical Support representatives are ready to answer your call Monday through Friday, from 8:30 a.m. to 5:00 p.m. Eastern Standard Time. Our numbers for calls are:

**Toll Free:** 800-426-8979 (North America only)

**Telephone:** 519-836-1291 (Live assistance available 8:30 a.m. to 5:00 p.m. EST,  
Monday to Friday)

**Facsimile:** 519-836-4878 (on-line 24 hours)



## Limited Product Warranty

Connect Tech Inc. provides a two-year Warranty for the COM Express® Type 10 PC Connector Carrier Board. Should this product, in Connect Tech Inc.'s opinion, fail to be in good working order during the warranty period, Connect Tech Inc. will, at its option, repair or replace this product at no charge, provided that the product has not been subjected to abuse, misuse, accident, disaster or non-Connect Tech Inc. authorized modification or repair.

You may obtain warranty service by delivering this product to an authorized Connect Tech Inc. business partner or to Connect Tech Inc. along with proof of purchase. Product returned to Connect Tech Inc. must be pre-authorized by Connect Tech Inc. with an RMA (Return Material Authorization) number marked on the outside of the package and sent prepaid, insured and packaged for safe shipment. Connect Tech Inc. will return this product by prepaid ground shipment service.

The Connect Tech Inc. Limited Warranty is only valid over the serviceable life of the product. This is defined as the period during which all components are available. Should the product prove to be irreparable, Connect Tech Inc. reserves the right to substitute an equivalent product if available or to retract the Warranty if no replacement is available.

The above warranty is the only warranty authorized by Connect Tech Inc. Under no circumstances will Connect Tech Inc. be liable in any way for any damages, including any lost profits, lost savings or other incidental or consequential damages arising out of the use of, or inability to use, such product.

## Copyright Notice

The information contained in this document is subject to change without notice. Connect Tech Inc. shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material. This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Connect Tech, Inc.

Copyright © 2017 by Connect Tech, Inc.

## Trademark Acknowledgment

Connect Tech, Inc. acknowledges all trademarks, registered trademarks and/or copyrights referred to in this document as the property of their respective owners.

Not listing all possible trademarks or copyright acknowledgments does not constitute a lack of acknowledgment to the rightful owners of the trademarks and copyrights mentioned in this document.

## ESD Warning



Electronic components and circuits are sensitive to ElectroStatic Discharge (ESD). When handling any circuit board assemblies including Connect Tech COM Express carrier assemblies, it is recommended that ESD safety precautions be observed. ESD safe best practices include, but are not limited to:

- Leaving circuit boards in their antistatic packaging until they are ready to be installed.
- Using a grounded wrist strap when handling circuit boards, at a minimum you should touch a grounded metal object to dissipate any static charge that may be present on you.
- Only handling circuit boards in ESD safe areas, which may include ESD floor and table mats, wrist strap stations and ESD safe lab coats.
- Avoiding handling circuit boards in carpeted areas.
- Try to handle the board by the edges, avoiding contact with components.

## Revision History

Revision	Date	Changes
0.00	2017-08-01	Original Release

## Introduction

Connect Tech's **COM Express® Type 10 PC Connector Carrier** is an extremely small carrier board featuring a combination of PC style connectors and locking pin header connectors. The carrier has a robust offering, with 2x USB 3.0 Type A ports, 2x USB 2.0 Type A ports, 1x HDMI, 1x LVDS interface, and 2x GbE.

The COM Express Type 10 PC Connector Carrier Board provides support for the latest generation of low-powered CPUs. It is ideal for space constrained applications and supports extended temperature ranges of -40°C to +85°C.

## Product Features and Specifications

Specifications	
Compatibility	COM Express® Type 10 Mini Modules PICMG COM Express® COM.0 R2.1
Mini PCIe Expansion	2 x half size cards OR 1 x full length card Both sockets have PCIe and USB signaling, one socket also can be configured as mSATA.
Storage	1 x mSATA
USB	2 x USB 3.0 Ports (Only if supported by COM Express Module) 6 x USB 2.0 Ports (2 to USB 3.0 connector, 2 to USB 2.0 connector, 2 to miniPCIe)
Network	2 x Gigabit Ethernet (10/10/1000) Ports: 1 from COM Express 1 from on-board Intel 82574I PHY/Controller
GPIO	8-bit GPIO
Display	1 x HDMI 1 x LVDS
Audio	HD Audio (Cirrus Logic CS4207 codec) 1 x stereo input 1 x stereo output
Serial	2 x RS-232/422/485 hardware selectable ports
Misc External Interfaces	SMBus I2C Battery Low Indication System Status (S3 and Reset Outputs)
Power	Single wide input range +8V to +14V DC (may be module dependent)
RTC Battery	No on-board RTC battery Option to connect external RTC battery.
Connectors	USB Type A, RJ45, HDMI connectors, additional signals via shrouded locking ruggedized 2mm pitch headers. Can be mated to CTI custom cable set to panel mount or PC MIL type connectors
Mechanical Information	84mm x 73.415mm CCG022: <a href="#">Download 3D model here</a>
Weight	68g (carrier only, no module installed)
Operating Temperature	-40°C to +85°C




## Part Numbers / Ordering Information

Part Number	
CCG022	COM Express® Type 10 PC Connector Carrier




## Product Overview

### CCG022 Block Diagram

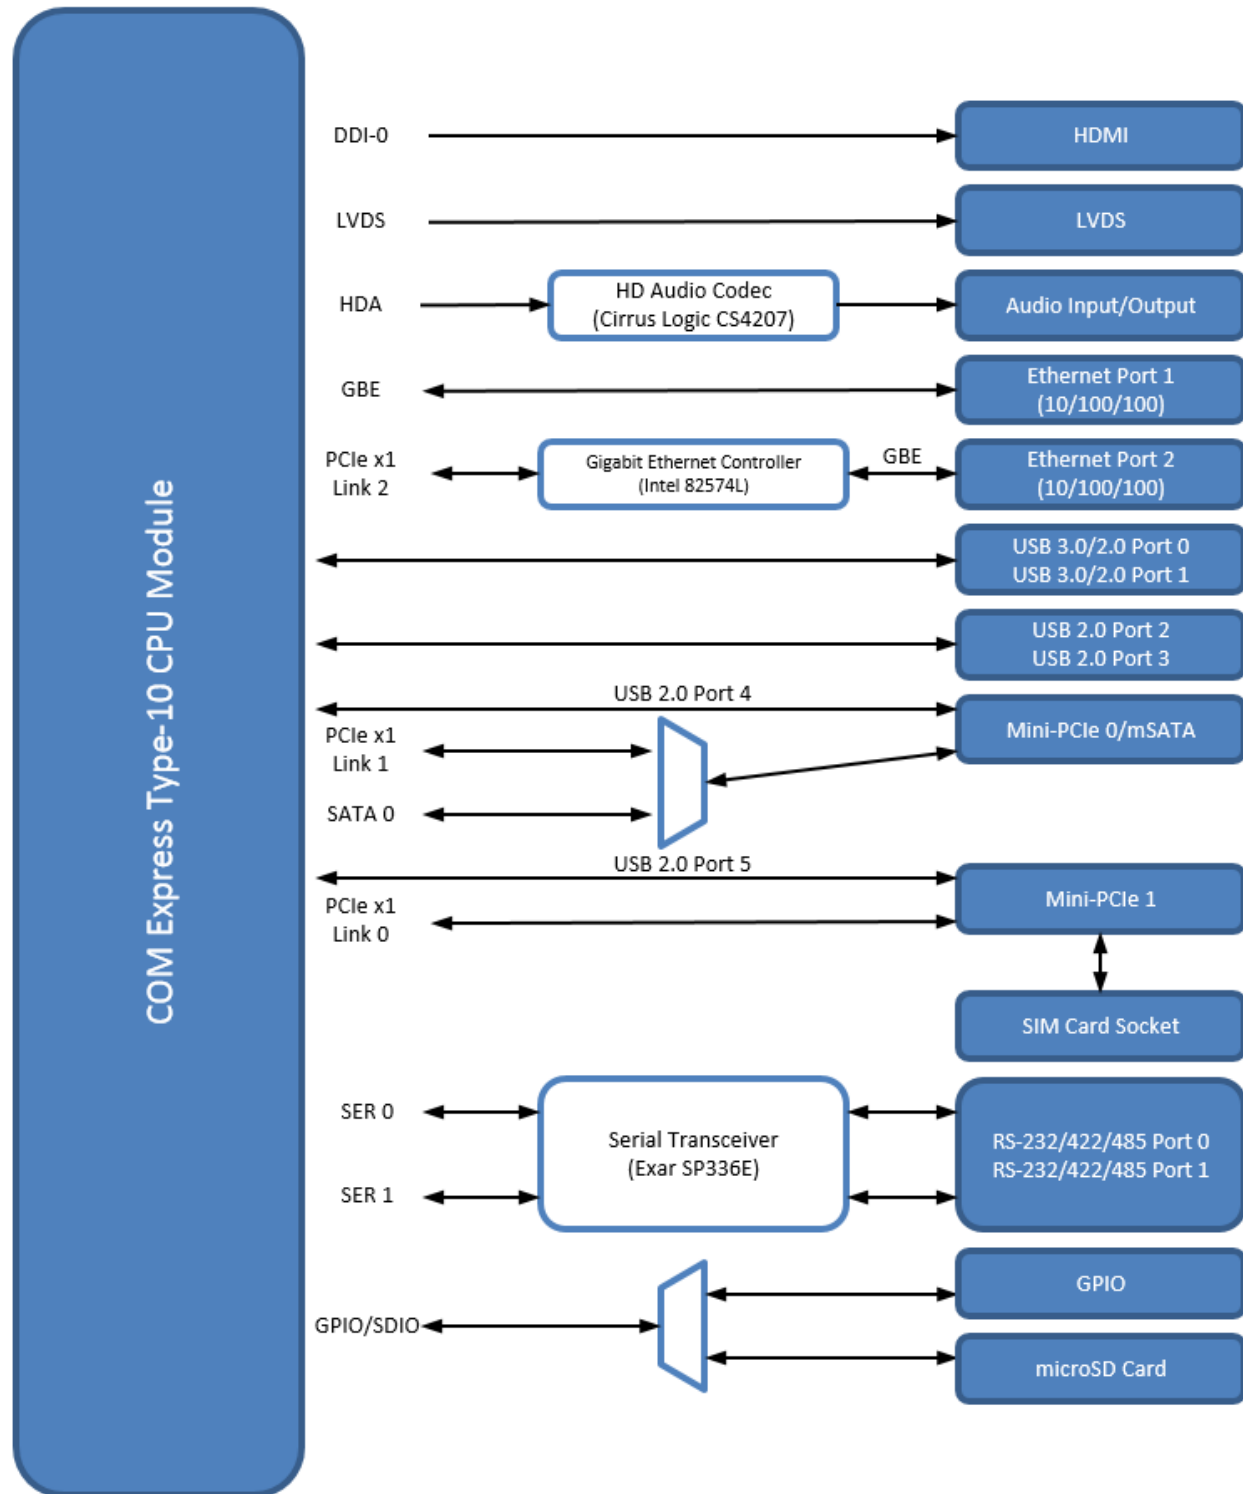


## Connector Summary & Locations

### CCG022 Top View

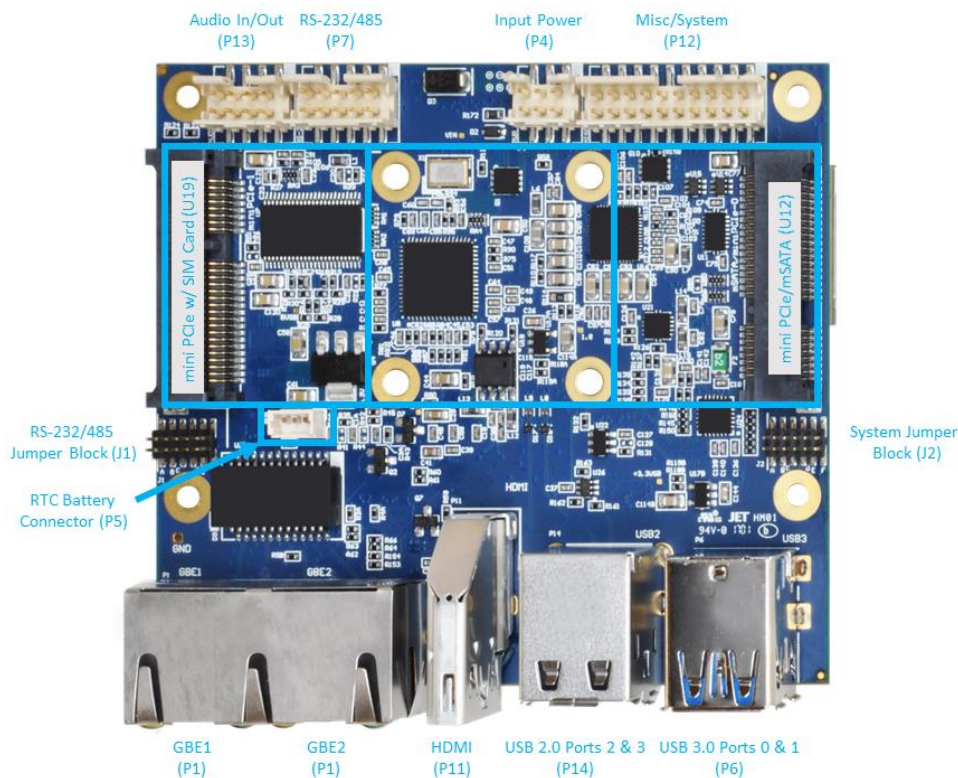

### CCG022 Bottom View

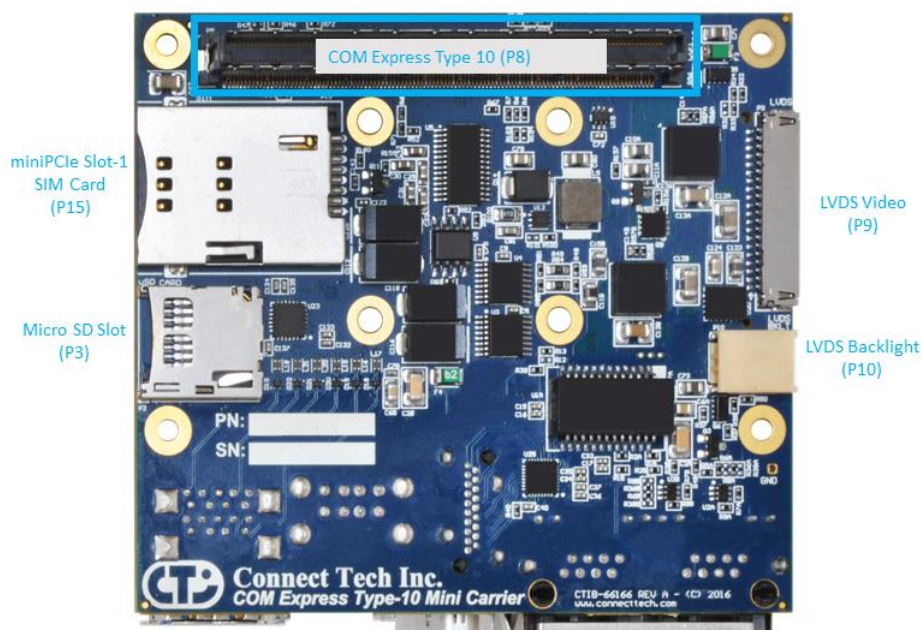



Designator	Description
P1	GBE0/1 Connector (2x1 RJ45 Connector)
P3	microSD Card Connector
P4	Input Power Connector
P5	RTC Battery Connector
P6	USB 3.0 Connector
P7	RS-232/485 Connector
P8	COM Express Type 10 Connector
P9	LVDS Video Connector
P10	LVDS Backlight Power Connector
P11	HDMI Connector
P12	Misc/System Connector
P13	Audio Input/Output Connector
P14	USB 2.0 Port 2 & 3 Connector
P15	miniPCle Slot-1 SIM Socket


## Jumper Summary

Designator	Description
J1	RS-232/RS-485 Jumper Block
J2	System Jumper Block

## Detailed Feature Pinouts and Functional Descriptions

### COM Express Module

The processor and chipset are implemented on the COM Express Type 10 CPU module, which connects to the COM Express carrier via a Tyco fine pitch stacking connector.

<b>Function</b>	COM Express interface	
<b>Location</b>	P8	
<b>Carrier Connector PN</b>	3-6318491-6 Manufacturer: TE Connectivity	
<b>Mating Connector PN</b>	3-1827231-6 Manufacturer: TE Connectivity	
<b>Pinout</b>	<u><a href="#">See Appendix A</a></u>	

## Display Outputs

### LVDS Video Connector

The COM Express carrier provides dual 18 or 24 bit LVDS display channels via P9, which are connected directly from the COM Express module.

Function	LVDS Graphics		
Location	P9		
Carrier Connector PN	DF19G-20P-1H(54) - Manufacturer: Hirose		
Mating Connector PN	DF19-20S-1C - Manufacturer: Hirose		
Pinout	Pin	Signal	Description
	1	+3.3 VCC_PNL	Panel Power
	2	+3.3 VCC_PNL	Panel Power
	3	GND	Digital ground
	4	GND	Digital ground
	5	LVDS_A0_N	Channel A Data
	6	LVDS_A0_P	Channel A Data
	7	GND	Digital ground
	8	LVDS_A1_N	Channel A Data
	9	LVDS_A1_P	Channel A Data
	10	GND	Digital ground
	11	LVDS_A2_N	Channel A Data
	12	LVDS_A2_P	Channel A Data
	13	GND	Digital ground
	14	LVDS_CLK_N	Channel A Data
	15	LVDS_CLK_P	Channel A Data
	16	GND	Digital ground
	17	+5 VCC_PNL [1]	Backlight Power
	18	+5 VCC_PNL [1]	Backlight Power
	19	GND	Digital ground
	20	BKLT Control [2]	LED ADJ




[1] – **+5V\_VCC\_PNL** – This voltage can be enabled or disabled to the display via Jumper J2 position B.


[2] – **BKLT Control** – This signal can be connected to the COM Express backlight control pin or to GND via Jumper J2 position C and D.

## LVDS Backlight Power Connector

The COM Express Type 10 PC Connector Carrier is equipped with a LVDS backlight inverter power supply connector. This power supply is designed to power HDA700LPT-GHL (or similar screen type) which has 13 parallel strings of 3 series white LEDS. Each white LED has a Vf of approximately 3.3V.


Function	LVDS backlight Inverter power							
Location	P10							
Carrier Connector PN	SM02B-BHSS-1-TB - Manufacturer: JST							
Mating Connector PN	BHSR-02VS-1 (N) - Manufacturer: JST							
Pinout	<table><tr><th>Pin</th><th>Signal</th></tr><tr><td>1</td><td>VA LED</td></tr><tr><td>2</td><td>VK LED</td></tr></table>		Pin	Signal	1	VA LED	2	VK LED
Pin	Signal							
1	VA LED							
2	VK LED							

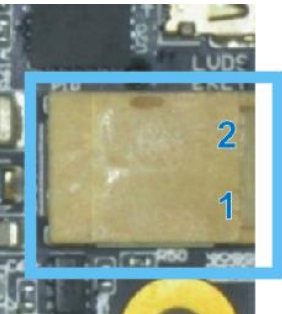



## HDMI Video Connector

The COM Express Type 10 PC Connector Carrier features a HDMI connector.


<b>Function</b>	HDMI Output Connector	
<b>Location</b>	P11	
<b>Carrier Connector PN</b>	2007435-3 - Manufacturer: TE	
<b>Mating Connector PN</b>	Standard HDMI Type A Plug	
<b>Pinout</b>	Standard HDMI Type A pinout.	



## USB

### USB 2.0 Port Connectors


The COM Express Type 10 PC Connector Carrier has 2 external USB 2.0 ports. Each of these are directly sourced from the COM Express Type 10 module and do not go through any external hubs or bridges.

<b>Function</b>	USB 2.0 Connector	
<b>Locations</b>	P14	
<b>Carrier Connector PN</b>	067298-3091 - Manufacturer: Molex	
<b>Mating Connector PN</b>	Standard USB 2.0 Type A	
<b>Pinout</b>	Standard USB 2.0 Type A	

### USB 3.0/2.0 Port Connectors

The maximum configuration for a Type 10 COM Express Modules allows for 2 USB 3.0 Ports with integrated USB 2.0 Ports. However most modules currently on the market only expose a single USB 3.0 Port. The USB 3.0 signals are sourced from the COM Express Module, and run through a Pericom Semiconductor PI3EQX7502AIZDE re-driver.

Over current protection, power supply filtering and ESD protection is also provided.

<b>Function</b>	USB 2.0/3.0	
<b>Location</b>	P6	
<b>Carrier Connector PN</b>	1932355-1 – Manufacturer: TE	
<b>Mating Connector PN</b>	Standard USB 3.0 Type A	
<b>Pinout</b>	Standard USB 3.0 Type A	




## 10/100/1000 Ethernet (GBE) Connector

The COM Express Type 10 PC Connector Carrier features dual 10/100/1000 Ethernet Ports.

GBE Port 1 is coming directly from the COM Express module.

GBE Port 2 is coming from an Intel 82574 PCIe PHY Controller located on the carrier.

<b>Function</b>	LAN Connector	
<b>Locations</b>	P1	
<b>Carrier Connector PN</b>	RJHSE-5381-02 - Manufacturer: Amphenol	
<b>Mating Connector PN</b>	Standard 10/100/1000 RJ45 Ethernet; refer to IEEE 802.3	
<b>Pinout</b>	Standard 10/100/1000 RJ45 Ethernet; refer to IEEE 802.3	

## Software Support for the Intel 82574

Additional drivers will be needed to properly operate the GBE Port 2 on the COM Express carrier.

These drivers can be downloaded directly from Intel website from the below link:


<http://downloadcenter.intel.com/SearchResult.aspx?lang=eng&ProductFamily=Ethernet+Components&ProductLine=Ethernet+Controllers&Product=Intel%C2%AE+82574+Gigabit+Ethernet+Controller>

## Serial

The COM Express Type 10 PC Connector Carrier provides 2 asynchronous serial ports. Each of these ports are derived directly from the COM Express Type 10 SER1 and SER2 connections. These ports are hardware selectable through the means of jumpers to RS-232 or RS-422/485

### RS-232/485 Connector

<b>Function</b>	RS-232 / RS-485		
<b>Locations</b>	P7		
<b>Carrier Connector PN</b>	98424-G52-10LF - Manufacturer: FCI		
<b>Mating Connector PN</b>	10073599-010LF - Manufacturer: FCI		
<b>Pinout</b>	<b>Pin</b>	<b>Signal</b>	<b>Description</b>
	1	232TX0/485TX0+	RS-232 0 Transmit / RS-485 0 Transmit +
	2	232RX0/485RX0+	RS-232 0 Transmit / RS-485 0 Transmit +
	3	485TX0-	RS-485 0 Transmit -
	4	485RX0-	RS-485 0 Transmit -
	5	232/485-GND0	Port 0 Ground
	6	232/485-GND1	Port 1 Ground
	7	232TX1/485TX1+	RS-232 1 Transmit / RS-485 1 Transmit +
	8	232RX1/485RX+	RS-232 1 Transmit / RS-485 1 Transmit +
	9	485TX1-	RS-485 1 Transmit -
	10	485RX1+	RS-485 1 Receive -




## RS-232/485 Jumper Configuration

Below is a listing of the 3 main configurations of jumper settings for the serial ports on the carrier board. Positions A & B set the line mode, while positions C – F set BIAS termination for RS-485 signaling.

### J1 – RS-232/485 Jumper Block

Position	Jumper Description
A	Serial Mode Bit - M0
B	Serial Mode Bit – M1
C	Port 0 RS-485 BIAS+
D	Port 0 RS-485 BIAS-
E	Port 1 RS-485 BIAS+
F	Port 1 RS-485 BIAS-

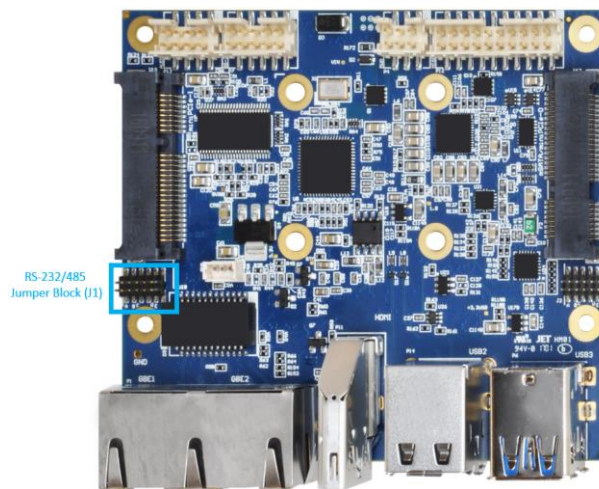

### Serial Line Modes

Position A – M0	Position B – M1	Port 0 Selected Mode	Port 1 Selected Mode
OFF	OFF	RS-232	RS-232
OFF	ON	RS-422/485	RS-422/485
ON	OFF	RS-232	RS-422/485
ON	ON	Undefined	Undefined


### Examples



## Audio

The COM Express Type 10 PC Connector Carrier features HD Audio capabilities care of the Cirrus Logic CS4207 Codec device. From the codec 1 input (microphone) and 1 output (headphone) are available.

Function	Audio Connector																													
Locations	P13																													
Carrier Connector PN	98424-G52-10LF - Manufacturer: FCI																													
Mating Connector PN	10073599-010LF - Manufacturer: FCI																													
Pinout	<table><tr><th>Pin</th><th>Signal</th><th>Description</th></tr><tr><td>1</td><td>-</td><td>No Connect</td></tr><tr><td>2</td><td>-</td><td>No Connect</td></tr><tr><td>3</td><td>MIC-R</td><td>Mic Input - Right Channel</td></tr><tr><td>4</td><td>MIC-L</td><td>Mic Input - Left Channel</td></tr><tr><td>5</td><td>GND</td><td>Mic GND / Shield</td></tr><tr><td>6</td><td>GND</td><td>Headphone GND / Shield</td></tr><tr><td>7</td><td>HPOUT-R</td><td>Headphone Right Channel</td></tr><tr><td>8</td><td>HPOUT-L</td><td>Headphone Left Channel</td></tr></table>			Pin	Signal	Description	1	-	No Connect	2	-	No Connect	3	MIC-R	Mic Input - Right Channel	4	MIC-L	Mic Input - Left Channel	5	GND	Mic GND / Shield	6	GND	Headphone GND / Shield	7	HPOUT-R	Headphone Right Channel	8	HPOUT-L	Headphone Left Channel
	Pin	Signal	Description																											
	1	-	No Connect																											
	2	-	No Connect																											
	3	MIC-R	Mic Input - Right Channel																											
	4	MIC-L	Mic Input - Left Channel																											
	5	GND	Mic GND / Shield																											
	6	GND	Headphone GND / Shield																											
	7	HPOUT-R	Headphone Right Channel																											
	8	HPOUT-L	Headphone Left Channel																											

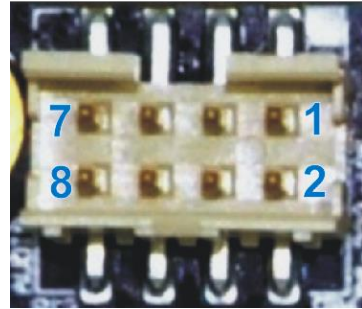

## Software Support for the CS4207

The audio codec used on the carrier board is the CS4207 from Cirrus Logic.

Additional drivers will be needed to properly operate audio on the COM Express carrier. Some downloadable drivers can be found below.

<https://www.cirrus.com/products/cs4207/>


**Linux Driver:** Included in kernels 2.6.30 and up.

## microSD Card Connector

The COM Express Type 10 PC Connector Carrier provides a Micro SD Card Slot at P3. This Micro SD Card slot sources the SDIO interface from the COM Express modules GPIO pins.

**\*\* Note this SD card slot will ONLY operate if the COM Express module provides the SDIO interface over the GPIO pins. Some COM Express modules may have this as a BIOS setting, others will be strictly a hardware option. See below for the SDIO / GPIO mapping \*\***

<b>Function</b>	Micro SD Card Slot		
<b>Locations</b>	P3		
<b>Carrier Connector PN</b>	502570-0893 - Manufacturer: Molex		
<b>Pinout</b>	<b>Pin</b>	<b>SDIO Signal</b>	<b>COM Express GPIO Mapping</b>
	1	SD_D2	GPI2
	2	SD_D3	GPI3
	3	SD_CMD	GPO1
	4	SD_VCC (+3.3V)	-
	5	SD_CLK	GPO0
	6	GND	-
	7	SD_D0	GPI0
	8	SD_D1	GPI1
	9	GND	-
	10	SD_CD#	GP03




## mini PCIe & mSATA Slots


### Dual Function mini PCIe mSATA Slots

The COM Express Type 10 PC Connector Carrier has a standard mini PCIe slot and a special dual purpose functionality mini PCIe / mSATA slot. The dual purpose slot can accept either a mini PCIe module or an mSATA SSD module. These slots have special circuitry that allows for the selection between connecting PCIe lanes or SATA lanes.

Each slot is also provided with a USB 2.0 connection in addition to the PCIe as per the mini PCIe specification; see below for a block diagram of the slots functionality.

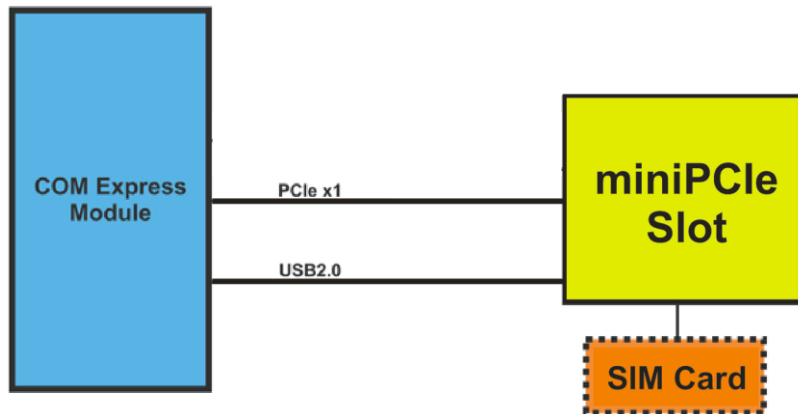

**Standard mini PCIe Slot Block Diagram (U19)**  
*Note: SIM card is only connected to the "left" mini pcie Slot 1*

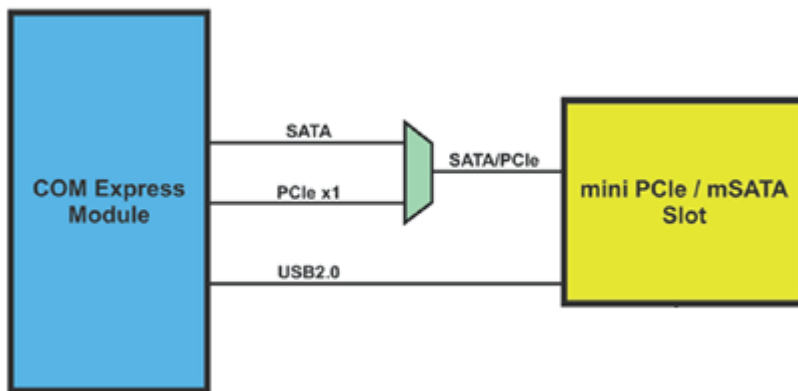


**PCIe / SATA Dual Functionality Diagram (U12)**

*\*\* Selection between mSATA and mini pcie is done via Jumper J2 position E. (ON = mini pcie, OFF = mSATA)*


## Half and Full Length mini PCIe / mSATA module Installation

The COM Express Type 10 PC Connector Carrier's mini pcie / mSATA slots are designed for easy ruggedized selection between full and half-length modules. This is done via the installation of M2.5 threaded standoffs. Standoffs and screws are provided with the shipping configuration of the carrier board. Below are some examples of how the various modules sizes can be installed.

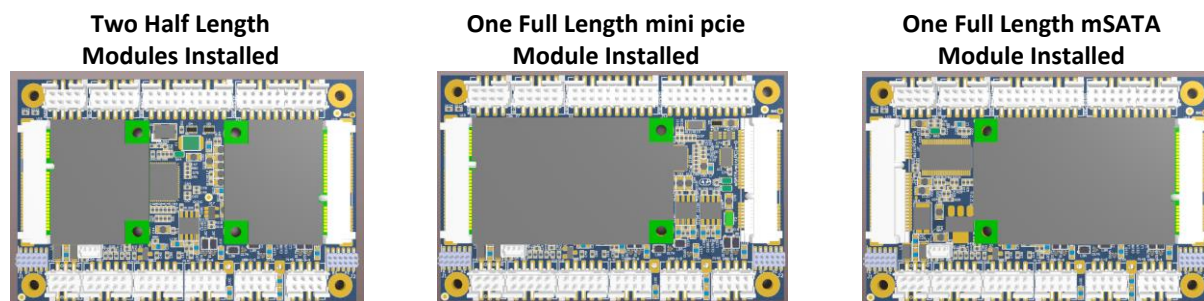

## Standoff and Screw Assembly Details


Below is a diagram of how the standoffs and mounting hardware should be installed. If the screw mount type standoffs is not preferred a solder-in standoff is also available.

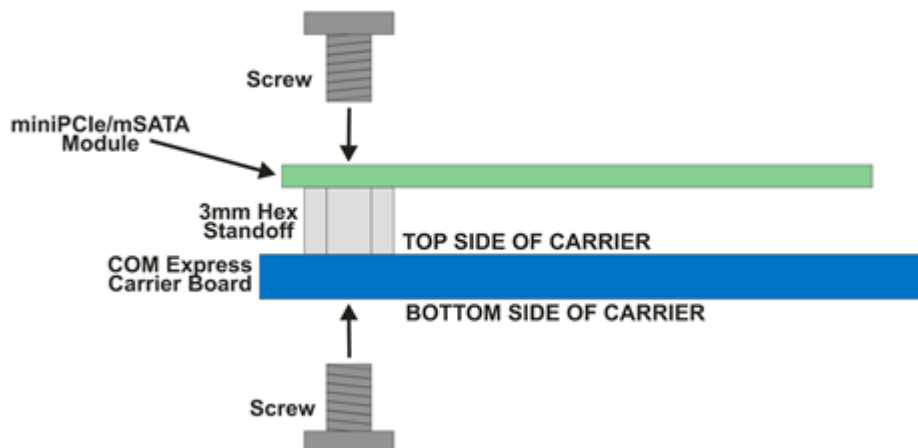




## CCG022 – External Hard Drive Installation

The CCG022 model only has a single mSATA link, so if an external 2.5” (or other) drive is needed, this can be facilitated by the use of an mSATA to SATA adapter. Contact [sales@connecttech.com](mailto:sales@connecttech.com) for more details on this configuration.

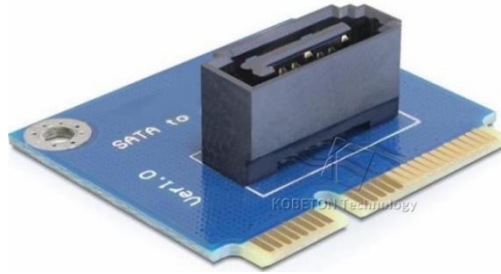



## mini pcie / mSATA Connector Pinout


Function	mini PCIe / mSATA Slots																																																																																																																																																																																																																				
Locations	U19 ("left slot" mini pcie) U12 ("right slot" mini pcie/mSATA)																																																																																																																																																																																																																				
Carrier Connector PN	Standard 52-pin 0.8mm pitch PCI Express mini Card connector																																																																																																																																																																																																																				
Pinout	<div><div>mSATA Pinout</div><table><tr><th>Pin Number</th><th>Description</th></tr><tr><td>1</td><td>NC</td></tr><tr><td>2</td><td>+3.3V</td></tr><tr><td>3</td><td>NC</td></tr><tr><td>4</td><td>GND</td></tr><tr><td>5</td><td>NC</td></tr><tr><td>6</td><td>+1.5V</td></tr><tr><td>7</td><td>NC</td></tr><tr><td>8</td><td>NC</td></tr><tr><td>9</td><td>GND</td></tr><tr><td>10</td><td>NC</td></tr><tr><td>11</td><td>NC</td></tr><tr><td>12</td><td>NC</td></tr><tr><td>13</td><td>NC</td></tr><tr><td>14</td><td>NC</td></tr><tr><td>15</td><td>GND</td></tr><tr><td>16</td><td>NC</td></tr><tr><td>17</td><td>NC</td></tr><tr><td>18</td><td>GND</td></tr><tr><td>19</td><td>NC</td></tr><tr><td>20</td><td>NC</td></tr><tr><td>21</td><td>RESV</td></tr><tr><td>22</td><td>NC</td></tr><tr><td>23</td><td>SATA TX+ To Host System</td></tr><tr><td>24</td><td>+3.3V</td></tr><tr><td>25</td><td>SATA TX- To Host System</td></tr><tr><td>26</td><td>GND</td></tr><tr><td>27</td><td>GND</td></tr><tr><td>28</td><td>+1.5V</td></tr><tr><td>29</td><td>GND</td></tr><tr><td>30</td><td>NC</td></tr><tr><td>31</td><td>SATA RX- From Host System</td></tr><tr><td>32</td><td>NC</td></tr><tr><td>33</td><td>SATA RX+ From Host System</td></tr><tr><td>34</td><td>GND</td></tr><tr><td>35</td><td>GND</td></tr><tr><td>36</td><td>NC</td></tr><tr><td>37</td><td>GND</td></tr><tr><td>38</td><td>NC</td></tr><tr><td>39</td><td>+3.3V</td></tr><tr><td>40</td><td>GND</td></tr><tr><td>41</td><td>+3.3V</td></tr><tr><td>42</td><td>NC</td></tr><tr><td>43</td><td>RESV</td></tr><tr><td>44</td><td>NC</td></tr><tr><td>45</td><td>NC</td></tr><tr><td>46</td><td>NC</td></tr><tr><td>47</td><td>NC</td></tr><tr><td>48</td><td>+1.5V</td></tr><tr><td>49</td><td>NC</td></tr><tr><td>50</td><td>GND</td></tr><tr><td>51</td><td>NC</td></tr><tr><td>52</td><td>+3.3V</td></tr></table></div> <div><div>mini pcie Pinout</div><table><tr><th>Pin Number</th><th>Description</th></tr><tr><td>1</td><td>NC</td></tr><tr><td>2</td><td>+3.3V</td></tr><tr><td>3</td><td>NC</td></tr><tr><td>4</td><td>GND</td></tr><tr><td>5</td><td>NC</td></tr><tr><td>6</td><td>+1.5V</td></tr><tr><td>7</td><td>CLKREQ#</td></tr><tr><td>8</td><td>UIM_PWR</td></tr><tr><td>9</td><td>GND</td></tr><tr><td>10</td><td>UIM_DATA</td></tr><tr><td>11</td><td>PCIe CLK+</td></tr><tr><td>12</td><td>UIM_CLK</td></tr><tr><td>13</td><td>PCIe CLK-</td></tr><tr><td>14</td><td>UIM_RESET</td></tr><tr><td>15</td><td>GND</td></tr><tr><td>16</td><td>UIM_VPP</td></tr><tr><td>17</td><td>NC</td></tr><tr><td>18</td><td>GND</td></tr><tr><td>19</td><td>NC</td></tr><tr><td>20</td><td>W_DISABLE#</td></tr><tr><td>21</td><td>RESV</td></tr><tr><td>22</td><td>NC</td></tr><tr><td>23</td><td>PCIe RX+ To Host System</td></tr><tr><td>24</td><td>+3.3V</td></tr><tr><td>25</td><td>PCIe RX- To Host System</td></tr><tr><td>26</td><td>GND</td></tr><tr><td>27</td><td>GND</td></tr><tr><td>28</td><td>+1.5V</td></tr><tr><td>29</td><td>GND</td></tr><tr><td>30</td><td>SMB_CLK</td></tr><tr><td>31</td><td>PCIe TX- From Host System</td></tr><tr><td>32</td><td>SMB_DATA</td></tr><tr><td>33</td><td>PCIe TX+ From Host System</td></tr><tr><td>34</td><td>GND</td></tr><tr><td>35</td><td>GND</td></tr><tr><td>36</td><td>USB D-</td></tr><tr><td>37</td><td>GND</td></tr><tr><td>38</td><td>USB D+</td></tr><tr><td>39</td><td>+3.3V</td></tr><tr><td>40</td><td>GND</td></tr><tr><td>41</td><td>+3.3V</td></tr><tr><td>42</td><td>NC</td></tr><tr><td>43</td><td>RESV</td></tr><tr><td>44</td><td>NC</td></tr><tr><td>45</td><td>NC</td></tr><tr><td>46</td><td>NC</td></tr><tr><td>47</td><td>NC</td></tr><tr><td>48</td><td>+1.5V</td></tr><tr><td>49</td><td>NC</td></tr><tr><td>50</td><td>GND</td></tr><tr><td>51</td><td>NC</td></tr><tr><td>52</td><td>+3.3V</td></tr></table></div>	Pin Number	Description	1	NC	2	+3.3V	3	NC	4	GND	5	NC	6	+1.5V	7	NC	8	NC	9	GND	10	NC	11	NC	12	NC	13	NC	14	NC	15	GND	16	NC	17	NC	18	GND	19	NC	20	NC	21	RESV	22	NC	23	SATA TX+ To Host System	24	+3.3V	25	SATA TX- To Host System	26	GND	27	GND	28	+1.5V	29	GND	30	NC	31	SATA RX- From Host System	32	NC	33	SATA RX+ From Host System	34	GND	35	GND	36	NC	37	GND	38	NC	39	+3.3V	40	GND	41	+3.3V	42	NC	43	RESV	44	NC	45	NC	46	NC	47	NC	48	+1.5V	49	NC	50	GND	51	NC	52	+3.3V	Pin Number	Description	1	NC	2	+3.3V	3	NC	4	GND	5	NC	6	+1.5V	7	CLKREQ#	8	UIM_PWR	9	GND	10	UIM_DATA	11	PCIe CLK+	12	UIM_CLK	13	PCIe CLK-	14	UIM_RESET	15	GND	16	UIM_VPP	17	NC	18	GND	19	NC	20	W_DISABLE#	21	RESV	22	NC	23	PCIe RX+ To Host System	24	+3.3V	25	PCIe RX- To Host System	26	GND	27	GND	28	+1.5V	29	GND	30	SMB_CLK	31	PCIe TX- From Host System	32	SMB_DATA	33	PCIe TX+ From Host System	34	GND	35	GND	36	USB D-	37	GND	38	USB D+	39	+3.3V	40	GND	41	+3.3V	42	NC	43	RESV	44	NC	45	NC	46	NC	47	NC	48	+1.5V	49	NC	50	GND	51	NC	52	+3.3V
Pin Number	Description																																																																																																																																																																																																																				
1	NC																																																																																																																																																																																																																				
2	+3.3V																																																																																																																																																																																																																				
3	NC																																																																																																																																																																																																																				
4	GND																																																																																																																																																																																																																				
5	NC																																																																																																																																																																																																																				
6	+1.5V																																																																																																																																																																																																																				
7	NC																																																																																																																																																																																																																				
8	NC																																																																																																																																																																																																																				
9	GND																																																																																																																																																																																																																				
10	NC																																																																																																																																																																																																																				
11	NC																																																																																																																																																																																																																				
12	NC																																																																																																																																																																																																																				
13	NC																																																																																																																																																																																																																				
14	NC																																																																																																																																																																																																																				
15	GND																																																																																																																																																																																																																				
16	NC																																																																																																																																																																																																																				
17	NC																																																																																																																																																																																																																				
18	GND																																																																																																																																																																																																																				
19	NC																																																																																																																																																																																																																				
20	NC																																																																																																																																																																																																																				
21	RESV																																																																																																																																																																																																																				
22	NC																																																																																																																																																																																																																				
23	SATA TX+ To Host System																																																																																																																																																																																																																				
24	+3.3V																																																																																																																																																																																																																				
25	SATA TX- To Host System																																																																																																																																																																																																																				
26	GND																																																																																																																																																																																																																				
27	GND																																																																																																																																																																																																																				
28	+1.5V																																																																																																																																																																																																																				
29	GND																																																																																																																																																																																																																				
30	NC																																																																																																																																																																																																																				
31	SATA RX- From Host System																																																																																																																																																																																																																				
32	NC																																																																																																																																																																																																																				
33	SATA RX+ From Host System																																																																																																																																																																																																																				
34	GND																																																																																																																																																																																																																				
35	GND																																																																																																																																																																																																																				
36	NC																																																																																																																																																																																																																				
37	GND																																																																																																																																																																																																																				
38	NC																																																																																																																																																																																																																				
39	+3.3V																																																																																																																																																																																																																				
40	GND																																																																																																																																																																																																																				
41	+3.3V																																																																																																																																																																																																																				
42	NC																																																																																																																																																																																																																				
43	RESV																																																																																																																																																																																																																				
44	NC																																																																																																																																																																																																																				
45	NC																																																																																																																																																																																																																				
46	NC																																																																																																																																																																																																																				
47	NC																																																																																																																																																																																																																				
48	+1.5V																																																																																																																																																																																																																				
49	NC																																																																																																																																																																																																																				
50	GND																																																																																																																																																																																																																				
51	NC																																																																																																																																																																																																																				
52	+3.3V																																																																																																																																																																																																																				
Pin Number	Description																																																																																																																																																																																																																				
1	NC																																																																																																																																																																																																																				
2	+3.3V																																																																																																																																																																																																																				
3	NC																																																																																																																																																																																																																				
4	GND																																																																																																																																																																																																																				
5	NC																																																																																																																																																																																																																				
6	+1.5V																																																																																																																																																																																																																				
7	CLKREQ#																																																																																																																																																																																																																				
8	UIM_PWR																																																																																																																																																																																																																				
9	GND																																																																																																																																																																																																																				
10	UIM_DATA																																																																																																																																																																																																																				
11	PCIe CLK+																																																																																																																																																																																																																				
12	UIM_CLK																																																																																																																																																																																																																				
13	PCIe CLK-																																																																																																																																																																																																																				
14	UIM_RESET																																																																																																																																																																																																																				
15	GND																																																																																																																																																																																																																				
16	UIM_VPP																																																																																																																																																																																																																				
17	NC																																																																																																																																																																																																																				
18	GND																																																																																																																																																																																																																				
19	NC																																																																																																																																																																																																																				
20	W_DISABLE#																																																																																																																																																																																																																				
21	RESV																																																																																																																																																																																																																				
22	NC																																																																																																																																																																																																																				
23	PCIe RX+ To Host System																																																																																																																																																																																																																				
24	+3.3V																																																																																																																																																																																																																				
25	PCIe RX- To Host System																																																																																																																																																																																																																				
26	GND																																																																																																																																																																																																																				
27	GND																																																																																																																																																																																																																				
28	+1.5V																																																																																																																																																																																																																				
29	GND																																																																																																																																																																																																																				
30	SMB_CLK																																																																																																																																																																																																																				
31	PCIe TX- From Host System																																																																																																																																																																																																																				
32	SMB_DATA																																																																																																																																																																																																																				
33	PCIe TX+ From Host System																																																																																																																																																																																																																				
34	GND																																																																																																																																																																																																																				
35	GND																																																																																																																																																																																																																				
36	USB D-																																																																																																																																																																																																																				
37	GND																																																																																																																																																																																																																				
38	USB D+																																																																																																																																																																																																																				
39	+3.3V																																																																																																																																																																																																																				
40	GND																																																																																																																																																																																																																				
41	+3.3V																																																																																																																																																																																																																				
42	NC																																																																																																																																																																																																																				
43	RESV																																																																																																																																																																																																																				
44	NC																																																																																																																																																																																																																				
45	NC																																																																																																																																																																																																																				
46	NC																																																																																																																																																																																																																				
47	NC																																																																																																																																																																																																																				
48	+1.5V																																																																																																																																																																																																																				
49	NC																																																																																																																																																																																																																				
50	GND																																																																																																																																																																																																																				
51	NC																																																																																																																																																																																																																				
52	+3.3V																																																																																																																																																																																																																				

## System Miscellaneous

### System Connector

This system control header can be used to connect power button, reset button, PC speaker, I2C device and monitor other power rails.

<b>Function</b>	Misc/System Control Header		
<b>Location</b>	P12		
<b>Carrier Connector PN</b>	98424-G52-20LF - Manufacturer: FCI		
<b>Mating Connector PN</b>	10073599-020LF - Manufacturer: FCI		
<b>Pinout</b>	Pin	Signal	Description
	1	PWRM.PWRBTN#	Power Button
	2	GND	Ground
	3	PWRM.SYS_RESET#	Reset Button
	4	GND	Ground
	5	PWRM.SUS_S3#	S3 Power Status Output
	6	SMB.ALERT#	SMB Alert Signal
	7	RESET-OUT#	Carrier Board Reset Output
	8	SMB.DAT	SMB Data
	9	GPO0	GPIO Output Bit-0
	10	SMB.CK	SMB Clock
	11	GPO1	GPIO Output Bit-1
	12	PWRM.BATLOW#	Battery Low Indicator
	13	GPO2	GPIO Output Bit-2
	14	I2C.CK	I2C Clock
	15	GPO3	GPIO Output Bit-3
	16	I2C.DAT	I2C Data
	17	GPI0	GPIO Input Bit-0
	18	GPI2	GPIO Input Bit-2
	19	GPI1	GPIO Input Bit-1
	20	GPI3	GPIO Input Bit-3




### J2 – System Jumper Block

Position	Jumper Description
A	SD Card (ON) / GPIO (OFF) selection
B	Enable +5V Backlight Supply to P9
C	Connect LVDS PWM Signal to GND
D	Connect LVDS PWM to COM Express
E	mini PCIe (ON) / mSATA (OFF) selection
F	SUS_S3# Functionality Enabled (ON) / Disabled (OFF)



## Input Power & Control

The COM Express Type 10 PC Connector Carrier accepts a single input to power all of the on board devices. All intermediate voltages are derived from this input. Most COM Express Type 10 module can accept a wide input voltage range, however the on-board power supplies on CTI's carrier can only accept up to a maximum +14V.

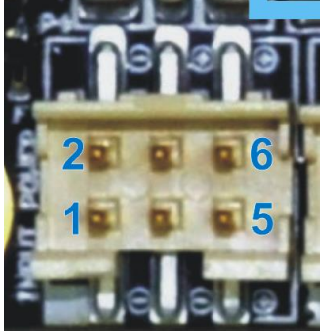
<b>Function</b>	Main Input Power																					
<b>Location</b>	P4																					
<b>Input Range</b>	+8 VDC to +14 VDC																					
<b>Carrier Connector PN</b>	98424-G52-06LF - Manufacturer: FCI																					
<b>Mating Connector PN</b>	10073599-006LF - Manufacturer: FCI																					
<b>Pinout</b>	<table border="1"> <thead> <tr> <th>Pin</th><th>Signal</th><th>Description</th></tr> </thead> <tbody> <tr> <td>1</td><td>GND</td><td>Ground / Return</td></tr> <tr> <td>2</td><td>GND</td><td>Ground / Return</td></tr> <tr> <td>3</td><td>GND</td><td>Ground / Return</td></tr> <tr> <td>4</td><td>+VIN</td><td>Power In</td></tr> <tr> <td>5</td><td>+VIN</td><td>Power In</td></tr> <tr> <td>6</td><td>+VIN</td><td>Power In</td></tr> </tbody> </table>		Pin	Signal	Description	1	GND	Ground / Return	2	GND	Ground / Return	3	GND	Ground / Return	4	+VIN	Power In	5	+VIN	Power In	6	+VIN
Pin	Signal	Description																				
1	GND	Ground / Return																				
2	GND	Ground / Return																				
3	GND	Ground / Return																				
4	+VIN	Power In																				
5	+VIN	Power In																				
6	+VIN	Power In																				

## RTC Battery

The COM Express Type 10 PC Connector Carrier allows for an external RTC battery to be connected. This battery should be a 3V DC battery, and it will hold all BIOS settings including date and time. Some COM Express modules may have the RTC battery on the module so in this case this connector can be left disconnected.

Connect Tech provides a Battery with cable assembly in any of the “Full” or “Starter” cable kits, please see the [Cable Section](#) of this manual for more details. If this battery is not sufficient for the application, a different battery cable can be designed.

For further information about RTC battery selection and life time estimation, see Application Note 00009 CTIN-00009 <http://connecttech.com/pdf/CTIN-00009.pdf>

<b>Function</b>	RTC Battery Connector												
<b>Location</b>	P5												
<b>Battery Voltage</b>	+3V DC												
<b>Carrier Connector PN</b>	53047-0310 - Manufacturer: Molex												
<b>Mating Connector PN</b>	51021-0300 - Manufacturer: Molex												
<b>Pinout</b>	<table border="1"> <thead> <tr> <th>Pin</th><th>Signal</th><th>Description</th></tr> </thead> <tbody> <tr> <td>1</td><td>+3V</td><td>RTC Battery Voltage Input</td></tr> <tr> <td>2</td><td>NC</td><td>No Connect</td></tr> <tr> <td>3</td><td>GND</td><td>Ground / Return</td></tr> </tbody> </table>		Pin	Signal	Description	1	+3V	RTC Battery Voltage Input	2	NC	No Connect	3	GND
Pin	Signal	Description											
1	+3V	RTC Battery Voltage Input											
2	NC	No Connect											
3	GND	Ground / Return											

## Typical Hardware Installation Procedure


1. Ensure all external system power supplies are off.
2. Install the COM Express module. Be sure to follow the manufacturer's direction for proper heatsink/heatspreader installation and any other cooling instructions from the manufacturer.
3. Install the necessary cables for the application. At a minimum, this would include:
  - a) Power cable to the input power connector
  - b) Connect a video display cable
  - c) Keyboard and mouse via USB
  - d) mSATA Hard Drive or bootable USB
4. Connect the power cable to power supply
5. Ensure your power supply is in the range of +8V to +14V DC
6. Switch on the power supply

### On-board Indicator LED

The COM Express Type 10 PC Connector Carrier has 1 on-board indicator LED.

LED	Description
D9	Power Good – Indicates carrier powers supplies are operating properly

See below for a diagram of where the LED is located.

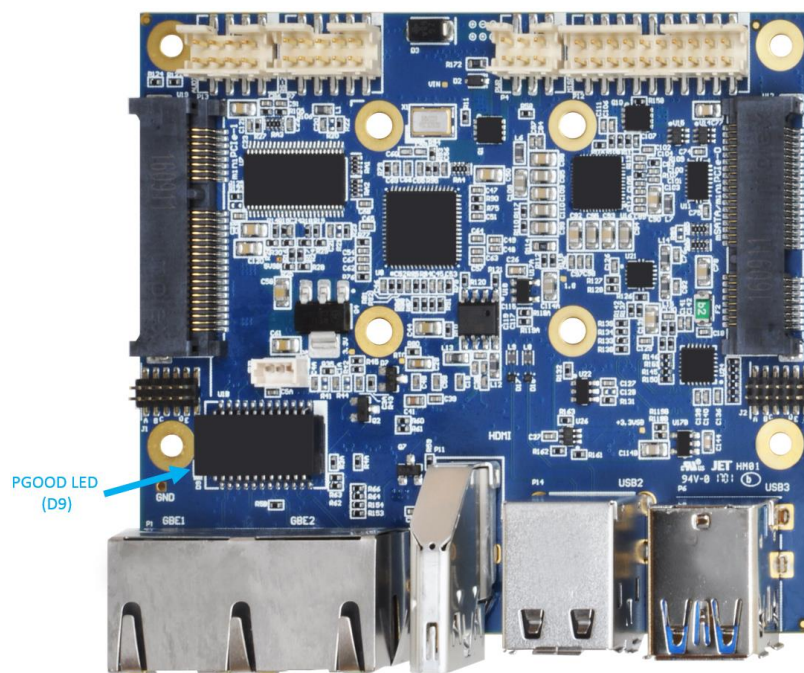

## Power Consumption and Thermals

### Current Consumption

Below are some examples of actual measurements taken with the COM Express Type 10 PC Connector Carrier running in various test configurations. Some values will change depending on what COM Express module is installed, please refer to the module manufactures manual for full details on the current consumption of the particular module you are using.

Actual Measurements	Amps	Watts
Carrier standalone no module installed, powered ON, with no loads	0.14	1.68
Module Installed <sup>[1]</sup> , single DDI video output, USB keyboard with system sitting in BIOS	0.55	6.6
Module Installed <sup>[1]</sup> , single DDI video output, all peripherals connected, booted Linux running, CPU running stress test	1.05	12.6

*Note [1]: COM Express Type 10 Module used for measurements - Intel Atom E3815 CPU*

*Note [2]: Input voltage for all tests above was +12V*


## Thermal Properties

All components on the COM Express Type 10 PC Connector Carrier are rated to a maximum operating temperature of -40°C to +85°C. The carrier has been fully tested to run in both extremes in an environmental test chamber with 125 CFM of airflow.


Below are thermal images of the carrier. System details:

- booted into a Linux OS, idle,
- 23.4 degrees Celsius open-air environment (lab setting)
- Intel Atom E3815 type 10 module installed
- Images captured after 30 minutes in above system state

TOP VIEW

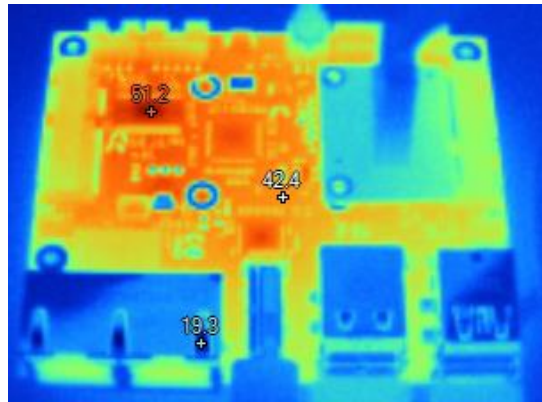

SIDE VIEWS

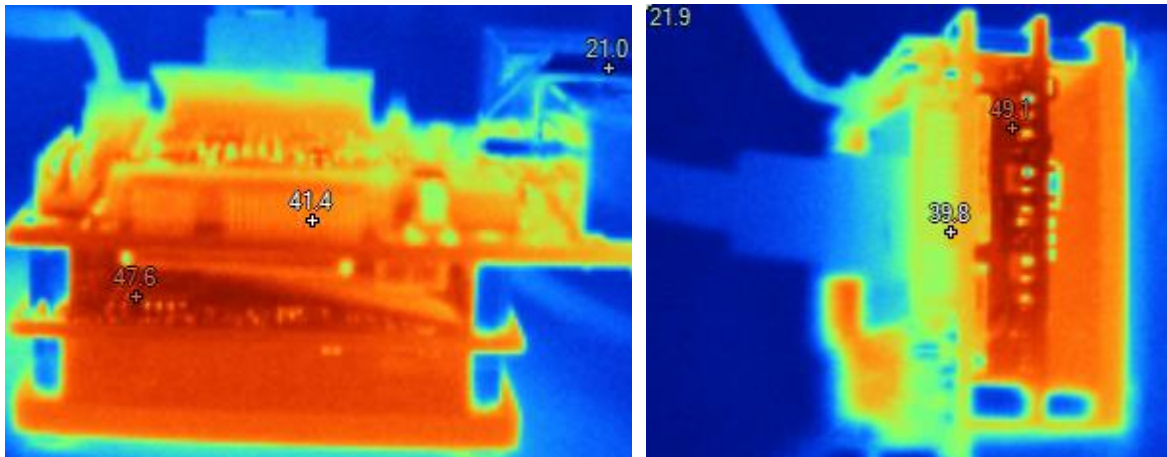






## Mechanical Drawings & Models

A complete **3D STEP Model** file of carrier board can be downloaded here:

[http://www.connecttech.com/ftp/3d\\_models/CCG022\\_3D\\_MODEL.zip](http://www.connecttech.com/ftp/3d_models/CCG022_3D_MODEL.zip)

### 2D Mechanical Dimensioned Drawing

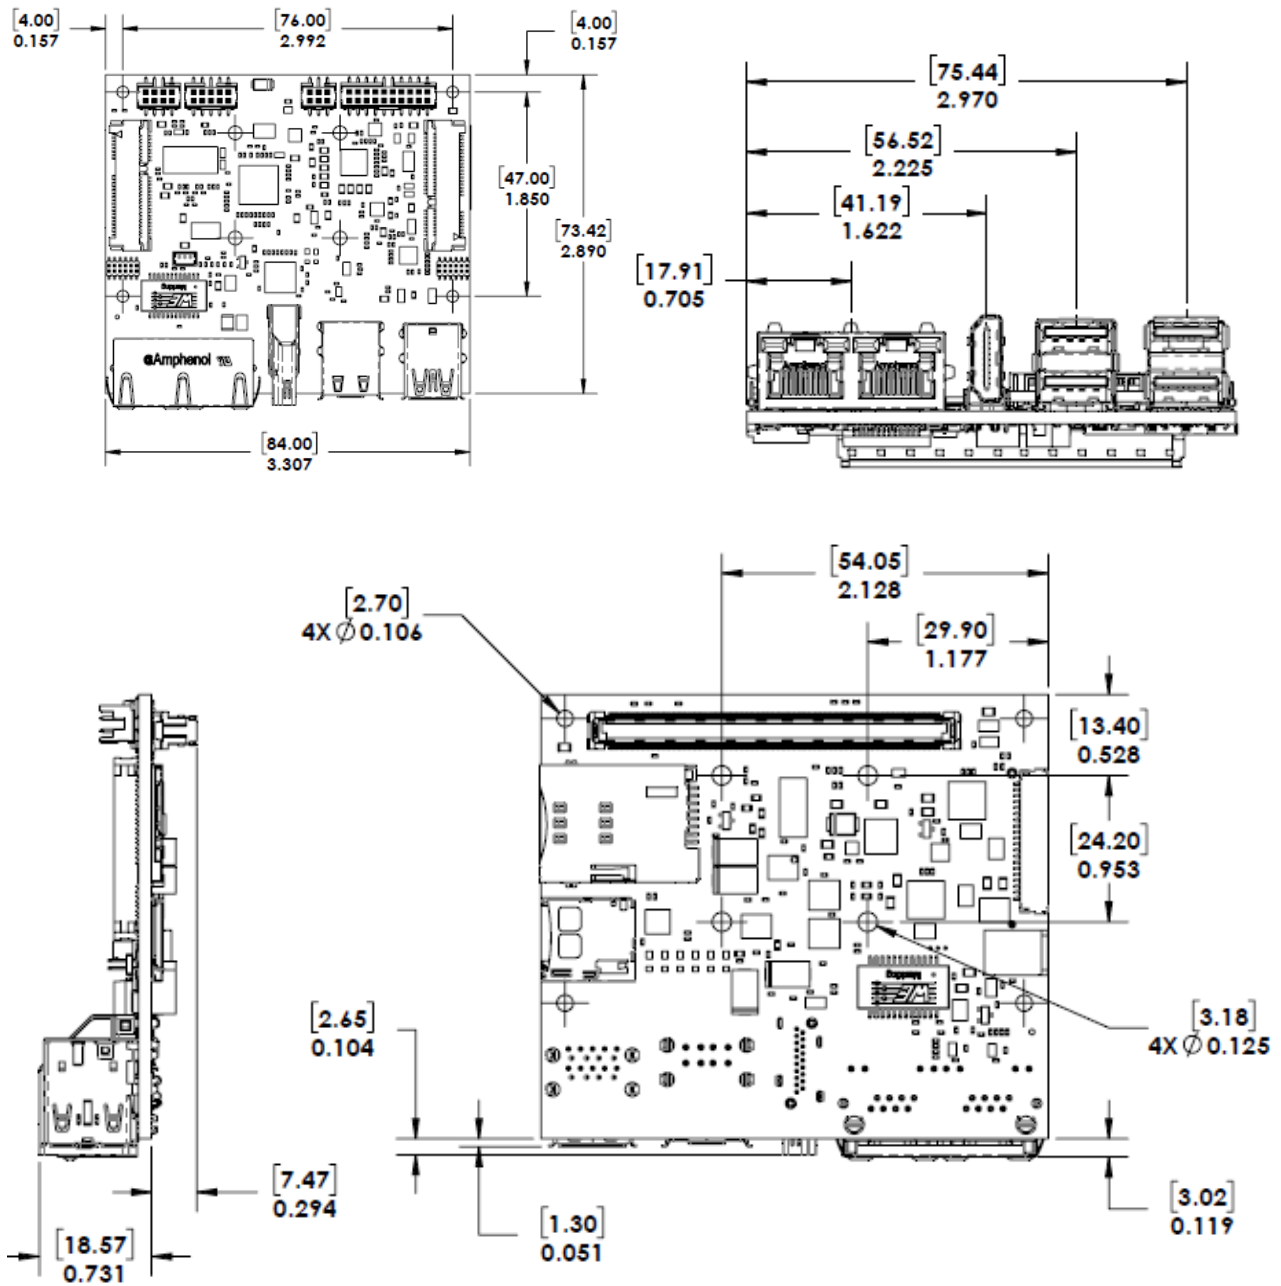



## Cable Kits

The following table summarizes the carrier's available cable kits from Connect Tech. These cable kits all include breakout cables to PC type panel mountable connectors. These cables can be used for production deployment or for lab bring-up and test purposes.

### CCG022 Cable Kit - CKG044 – “Full” Cable Kit

Description	Part Number	Quantity
Dual DB-9 panel mount to 10-pin MiniTek w/Latch	<a href="#"><u>CBG111</u></a>	1
Power Cable - Unterminated wires to 6-pin MiniTek w/Latch	<a href="#"><u>CBG112</u></a>	1
Dual 3.5mm Stereo Audio panel mount to 8-pin MiniTek w/Latch	<a href="#"><u>CBG118</u></a>	1
System Cable - Unterminated wires to 20-pin MiniTek w/Latch	<a href="#"><u>CBG116</u></a>	1





## Appendix A – COM Express Signal/Pinout Connection Details

The following table summarizes the COM Express Type-10 Mini Carrier's COM Express signal/pinout utilization. From this table you will be able to see which COM Express signals have been used and where they are connected to on the carrier. No Connection pins are noted as "NC", pull-ups as "PU", and pull-downs as "PD".

COM Express Signal	COM Express Pin	CCG022 Connection	Direction
GND (FIXED)	A1	GND	Power
GBE0_MDI3-	A2	GBE Port 0 (P1B)	I/O
GBE0_MDI3+	A3	GBE Port 0 (P1B)	I/O
GBE0_LINK100#	A4	GBE Port 0 (P1B)	Output
GBE0_LINK1000#	A5	GBE Port 0 (P1B)	Output
GBE0_MDI2-	A6	GBE Port 0 (P1B)	I/O
GBE0_MDI2+	A7	GBE Port 0 (P1B)	I/O
GBE0_LINK#	A8	GBE Port 0 (P1B)	Output
GBE0_MDI1-	A9	GBE Port 0 (P1B)	I/O
GBE0_MDI1+	A10	GBE Port 0 (P1B)	I/O
GND (FIXED)	A11	GND	Power
GBE0_MDI0-	A12	GBE Port 0 (P1B)	I/O
GBE0_MDI0+	A13	GBE Port 0 (P1B)	I/O
GBE0_CTREF	A14	GBE Port 0 (P1B)	Output
SUS_S3#	A15	System Header (P12)	Output
SATA0_TX+	A16	mSATA (U12)	Output
SATA0_TX-	A17	mSATA (U12)	Output
SUS_S4#	A18	NC	Output
SATA0_RX+	A19	mSATA (U12)	Input
SATA0_RX-	A20	mSATA (U12)	Input
GND (FIXED)	A21	GND	Power
USB_SSRX0-	A22	USB 3.0 Port 0 (P6)	Input
USB_SSRX0+	A23	USB 3.0 Port 0 (P6)	Input
SUS_S5#	A24	NC	Output
USB_SSRX1-	A25	USB 3.0 Port 1 (P6)	Input
USB_SSRX1+	A26	USB 3.0 Port 1 (P6)	Input
BATLOW#	A27	System Header (P12)	Input
SATA_ACT#	A28	NC	Output
HDA_SYNC	A29	HD Audio (P13)	Output
HDA_RST#	A30	HD Audio (P13)	Output
GND (FIXED)	A31	GND	Power
HDA_BITCLK	A32	HD Audio (P13)	Output
HDA_SDOUT	A33	HD Audio (P13)	Output
BIOS_DISABLE#	A34	NC	Input
THRMTRIP#	A35	NC	Output



COM Express Signal	COM Express Pin	CCG022 Connection	Direction
USB6-	A36	NC	I/O
USB6+	A37	NC	I/O
USB_6_7_OC#	A38	PU	Input
USB4-	A39	miniPCle Slot 0 (U12)	I/O
USB4+	A40	miniPCle Slot 0 (U12)	I/O
GND (FIXED)	A41	GND	Power
USB2-	A42	USB 2.0 Port 2 (P14)	I/O
USB2+	A43	USB 2.0 Port 2 (P14)	I/O
USB_2_3_OC#	A44	USB 2.0 Port 2/3 Overcurrent	Input
USB0-	A45	USB 2.0 Port 0 (P6)	I/O
USB0+	A46	USB 2.0 Port 0 (P6)	I/O
VCC_RTC	A47	RTC Battery (P5)	Power
EXCD0_PERST#	A48	NC	Output
EXCD0_CPPE#	A49	NC	Input
LPC_SERIRQ	A50	NC	I/O
GND (FIXED)	A51	GND	Power
RSVD	A52	NC	Passive
RSVD	A53	NC	Passive
GPI0	A54	MISC (P12) OR SD Card (P3)	I/O
RSVD	A55	NC	Passive
RSVD	A56	NC	Passive
GND	A57	GND	Power
PCIE_TX3+	A58	NC	Output
PCIE_TX3-	A59	NC	Output
GND (FIXED)	A60	GND	Power
PCIE_TX2+	A61	miniPCle Slot 1 (U19)	Output
PCIE_TX2-	A62	miniPCle Slot 1 (U19)	Output
GPI1	A63	MISC (P12) OR SD Card (P3)	I/O
PCIE_TX1+	A64	miniPCle Slot 0 (U12)	Output
PCIE_TX1-	A65	miniPCle Slot 0 (U12)	Output
GND	A66	GND	Power
GPI2	A67	MISC (P12) OR SD Card (P3)	I/O
PCIE_TX0+	A68	GBE PHY Controller	Output
PCIE_TX0-	A69	GBE PHY Controller	Output
GND (FIXED)	A70	GND	Power
LVDS_A0+	A71	LVDS Video (P9)	Output
LVDS_A0-	A72	LVDS Video (P9)	Output
LVDS_A1+	A73	LVDS Video (P9)	Output
LVDS_A1-	A74	LVDS Video (P9)	Output
LVDS_A2+	A75	LVDS Video (P9)	Output
LVDS_A2-	A76	LVDS Video (P9)	Output



COM Express Signal	COM Express Pin	CCG022 Connection	Direction
LVDS_VDD_EN	A77	LVDS Video (P9)	Output
LVDS_A3+	A78	NC	Power
LVDS_A3-	A79	NC	Power
GND (FIXED)	A80	GND	Power
LVDS_A_CK+	A81	LVDS Video (P9)	Output
LVDS_A_CK-	A82	LVDS Video (P9)	Output
LVDS_I2C_CK	A83	NC	Output
LVDS_I2C_DAT	A84	NC	I/O
GPI3	A85	MISC (P12) OR SD Card (P3)	I/O
RSVD	A86	NC	Passive
EDP_HPD	A87	NC	Passive
PCIE_CLK_REF+	A88	Main Carrier PCIe Clock	Output
PCIE_CLK_REF-	A89	Main Carrier PCIe Clock	Output
GND (FIXED)	A90	GND	Power
SPI_PWR	A91	NC	Power
SPI_MISO	A92	NC	Power
GPO0	A93	GPIO (P12) OR SD Card (P3)	I/O
SPI_CLK	A94	NC	Power
SPI_MOSI	A95	NC	Power
TPM_PP	A96	NC	Input
TYPE10#	A97	NC	Power
SER0_TX	A98	Serial Port 0 (P7)	Output
SER0_RX	A99	Serial Port 0 (P7)	Input
GND (FIXED)	A100	GND	Power
SER1_TX/CAN_TX	A101	Serial Port 1 (P7)	Output
SER1_RX/CAN_RX	A102	Serial Port 1 (P7)	Input
LID#	A103	NC	Input
VCC_12V	A104	Input Power +VIN (P4)	Power
VCC_12V	A105	Input Power +VIN (P4)	Power
VCC_12V	A106	Input Power +VIN (P4)	Power
VCC_12V	A107	Input Power +VIN (P4)	Power
VCC_12V	A108	Input Power +VIN (P4)	Power
VCC_12V	A109	Input Power +VIN (P4)	Power
GND (FIXED)	A110	GND	Power
GND (FIXED)	B1	GND	Power
GBE0_ACT#	B2	GBE Port 0 (P1B)	Output
LPC_FRAME#	B3	NC	Output
LPC_AD0	B4	NC	I/O
LPC_AD1	B5	NC	I/O
LPC_AD2	B6	NC	I/O
LPC_AD3	B7	NC	I/O



COM Express Signal	COM Express Pin	CCG022 Connection	Direction
LPC_DRQ0#	B8	NC	Input
LPC_DRQ1#	B9	NC	Input
LPC_CLK	B10	NC	Output
GND (FIXED)	B11	GND	Power
PWRBTN#	B12	System Header (P12)	Input
SMB_CK	B13	System Header (P12)	I/O
SMB_DAT	B14	System Header (P12)	I/O
SMB_ALERT#	B15	System Header (P12)	Input
SATA1_TX+	B16	NC	Output
SATA1_TX-	B17	NC	Output
SUS_STAT#	B18	NC	Output
SATA1_RX+	B19	NC	Input
SATA1_RX-	B20	NC	Input
GND (FIXED)	B21	GND	Power
USB_SSTX0-	B22	USB 3.0 Port 0 (P6)	Output
USB_SSTX0+	B23	USB 3.0 Port 0 (P6)	Output
PWR_OK	B24	Carrier Board Internal Circuitry	Input
USB_SSTX1-	B25	USB 3.0 Port 1 (P6)	Output
USB_SSTX1+	B26	USB 3.0 Port 1 (P6)	Output
WDT	B27	NC	Output
HDA_SDIN2	B28	PD	Input
HDA_SDIN1	B29	PD	Input
HDA_SDIN0	B30	HD Audio (P13)	Input
GND (FIXED)	B31	GND	Power
SPKR	B32	NC	Output
I2C_CK	B33	System Header (P12)	Output
I2C_DAT	B34	System Header (P12)	I/O
THRM#	B35	PU	Input
USB7-	B36	NC	I/O
USB7+	B37	NC	I/O
USB_4_5_OC#	B38	PU	Input
USB5-	B39	miniPCle Slot 1 (U19)	I/O
USB5+	B40	miniPCle Slot 1 (U19)	I/O
GND (FIXED)	B41	GND	Power
USB3-	B42	USB 2.0 Port 3 (P14)	I/O
USB3+	B43	USB 2.0 Port 3 (P14)	I/O
USB_0_1_OC#	B44	USB 2.0 Port 0/1 Overcurrent	Input
USB1-	B45	USB 2.0 Port 1 (P14)	I/O
USB1+	B46	USB 2.0 Port 1 (P14)	I/O
EXCD1_PERST#	B47	NC	Output
EXCD1_CPPE#	B48	NC	Input



COM Express Signal	COM Express Pin	CCG022 Connection	Direction
SYS_RESET#	B49	System Header (P12)	Input
CB_RESET#	B50	Carrier Board Internal Circuitry	Output
GND (FIXED)	B51	GND	Power
RSVD	B52	NC	Passive
RSVD	B53	NC	Passive
GPO1	B54	MISC (P12) OR SD Card (P3)	I/O
RSVD	B55	NC	Passive
RSVD	B56	NC	Passive
GPO2	B57	MISC (P12) OR SD Card (P3)	I/O
PCIE_RX3+	B58	NC	Input
PCIE_RX3-	B59	NC	Input
GND (FIXED)	B60	GND	Power
PCIE_RX2+	B61	miniPCle Slot 1 (U19)	Input
PCIE_RX2-	B62	miniPCle Slot 1 (U19)	Input
GPO3	B63	MISC (P12) OR SD Card (P3)	I/O
PCIE_RX1+	B64	miniPCle Slot 0 (U12)	Input
PCIE_RX1-	B65	miniPCle Slot 0 (U12)	Input
WAKE0#	B66	PU	Input
WAKE1#	B67	PU	Input
PCIE_RX0+	B68	GBE Port 1 (P1B)	Input
PCIE_RX0-	B69	GBE Port 1 (P1B)	Input
GND (FIXED)	B70	GND	Power
DDIO_PAIR0+	B71	HDMI (P11)	Output
DDIO_PAIR0-	B72	HDMI (P11)	Output
DDIO_PAIR1+	B73	HDMI (P11)	Output
DDIO_PAIR1-	B74	HDMI (P11)	Output
DDIO_PAIR2+	B75	HDMI (P11)	Output
DDIO_PAIR2-	B76	HDMI (P11)	Output
DDIO_PAIR4+	B77	NC	Output
DDIO_PAIR4-	B78	NC	Output
LVDS_BKLT_EN	B79	LVDS Backlight Power (P10)	Output
GND (FIXED)	B80	GND	Power
DDIO_PAIR3+	B81	HDMI (P11)	Output
DDIO_PAIR3-	B82	HDMI (P11)	Output
LVDS_BKLT_CTRL	B83	LVDS Video (P9)	Output
VCC_5V_SBY	B84	Carrier Board Internal Circuitry	Power
VCC_5V_SBY	B85	Carrier Board Internal Circuitry	Power
VCC_5V_SBY	B86	Carrier Board Internal Circuitry	Power
VCC_5V_SBY	B87	Carrier Board Internal Circuitry	Power
BIOS_DIS1#	B88	NC	Input
DD0_HPD	B89	HDMI (P11)	Output



COM Express Signal	COM Express Pin	CCG022 Connection	Direction
GND (FIXED)	B90	GND	Power
DDIO_PAIR5+	B91	NC	Output
DDIO_PAIR5-	B92	NC	Output
DDIO_PAIR6+	B93	NC	Output
DDIO_PAIR6-	B94	NC	Output
DDIO_DDC_AUX_SEL	B95	HDMI (P11)	Input
USB_HOST_PRSENT	B96	PU	Input
SPI_CS#	B97	NC	Passive
DDIO_CTRLCLK_AUX+	B98	HDMI (P11)	I/O
DDIO_CTRLCLK_AUX-	B99	HDMI (P11)	I/O
GND (FIXED)	B100	GND	Power
FAN_PWMOUT	B101	NC	Output
FAN_TACHIN	B102	NC	Input
SLEEP#	B103	NC	Input
VCC_12V	B104	Input Power +VIN (P4)	Power
VCC_12V	B105	Input Power +VIN (P4)	Power
VCC_12V	B106	Input Power +VIN (P4)	Power
VCC_12V	B107	Input Power +VIN (P4)	Power
VCC_12V	B108	Input Power +VIN (P4)	Power
VCC_12V	B109	Input Power +VIN (P4)	Power
GND (FIXED)	B110	GND	Power