

ATIS
270.100
NELLIS GROUND
275.800
NELLIS TOWER
327.000
NELLIS CONTROL
317.525
NELLIS DEP/APP EAST
384.400
BLACKJACK
377.800



Rwy		Knots	60	120	180	240	300	360
3L	(a)	V/V(fpm)	394	788	1182	1576	1970	2364
3R	(a)	V/V(fpm)	392	784	1176	1568	1960	2352
21L	(b)	V/V(fpm)	388	776	1164	1552	1940	2328
21R	(b)	V/V(fpm)	390	780	1170	1560	1950	2340

Minimum Climb Rate

Ⓐ to 9300

ⓑ to 13 500

CAUTION: If unable to comply with restrictions advise ATC prior to departure.


③ ④
7599 .

14.000

FYTTR

N3621.44

W11541.47

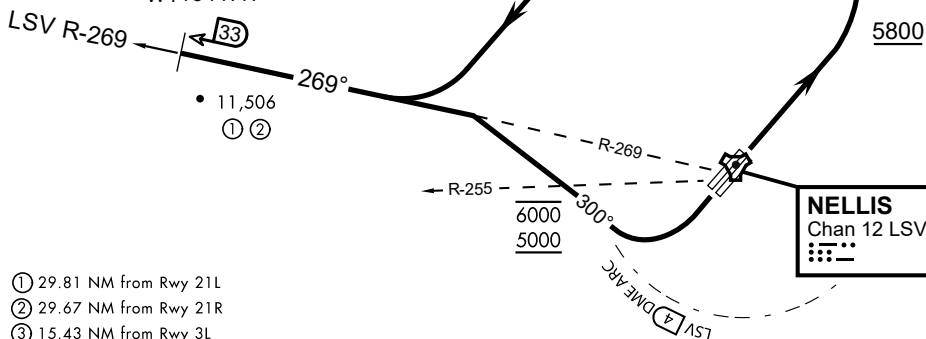

- ① 29.81 NM from Rwy 21L
- ② 29.67 NM from Rwy 21R
- ③ 15.43 NM from Rwy 3L
- ④ 15.57 NM from Rwy 3R

v.laBoG32 NTTR NAV CHART

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3L/R

- Fly runway heading until reaching 5,800'.
- Then climbing left turn to intercept LSV TACAN R-269 outbound.
- Cross FYTTR at or above 14,000' or as assigned, then via assigned route.

TAKEOFF RWY 21L/21R

- Turn right to intercept LSV TACAN R-269 outbound.
- Remain within LSV 4 DME until joining LSV R-269
- Cross R-255 between 5,000' and 6,000'.
- Cross FYTTR at or above 14,000' or as assigned, then via assigned route.

NOISE ABATEMENT PROCEDURES:

Fly according Nellis Noise Abatement instructions as published

FYTTR THREE DEPARTURE (FYTTR 3)