C2 EV Pack 48 V - PCB Placement Guide

Common 80 x 56 mm controller outline | 4-layer stackup | top-side placement | not a fabrication drawing

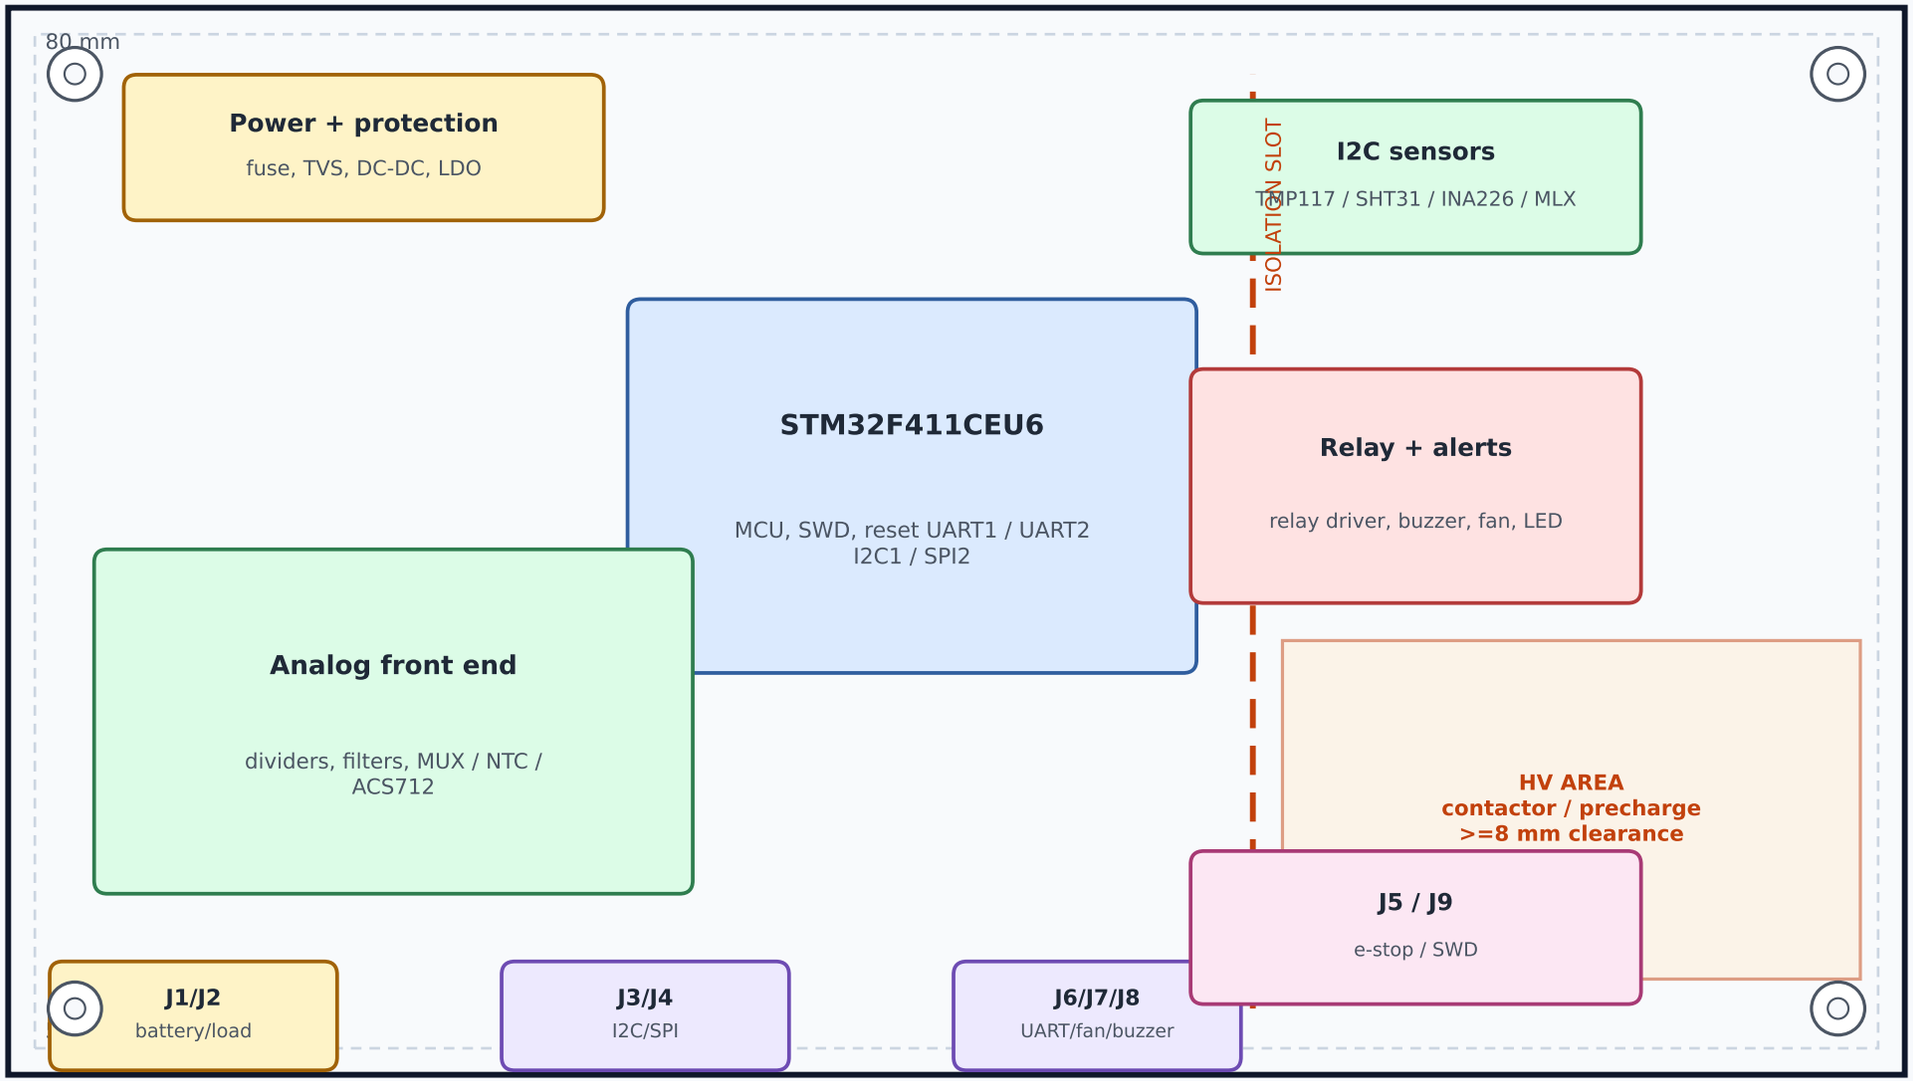

Stackup: 4-layer FR4, 1.6 mm, 1 oz copper | min trace/space 0.20 mm | min drill 0.30 mm | keep analog ground under front end.

Generated by hardware/diagrams/generate_diagrams.py | capture in KiCad before fabrication and run DRC/ERC