C1 Bench 6 V - Wiring and Pin Assignment

Reference point-to-point harness | USART2 gateway | I2C LCD | 8x LM35

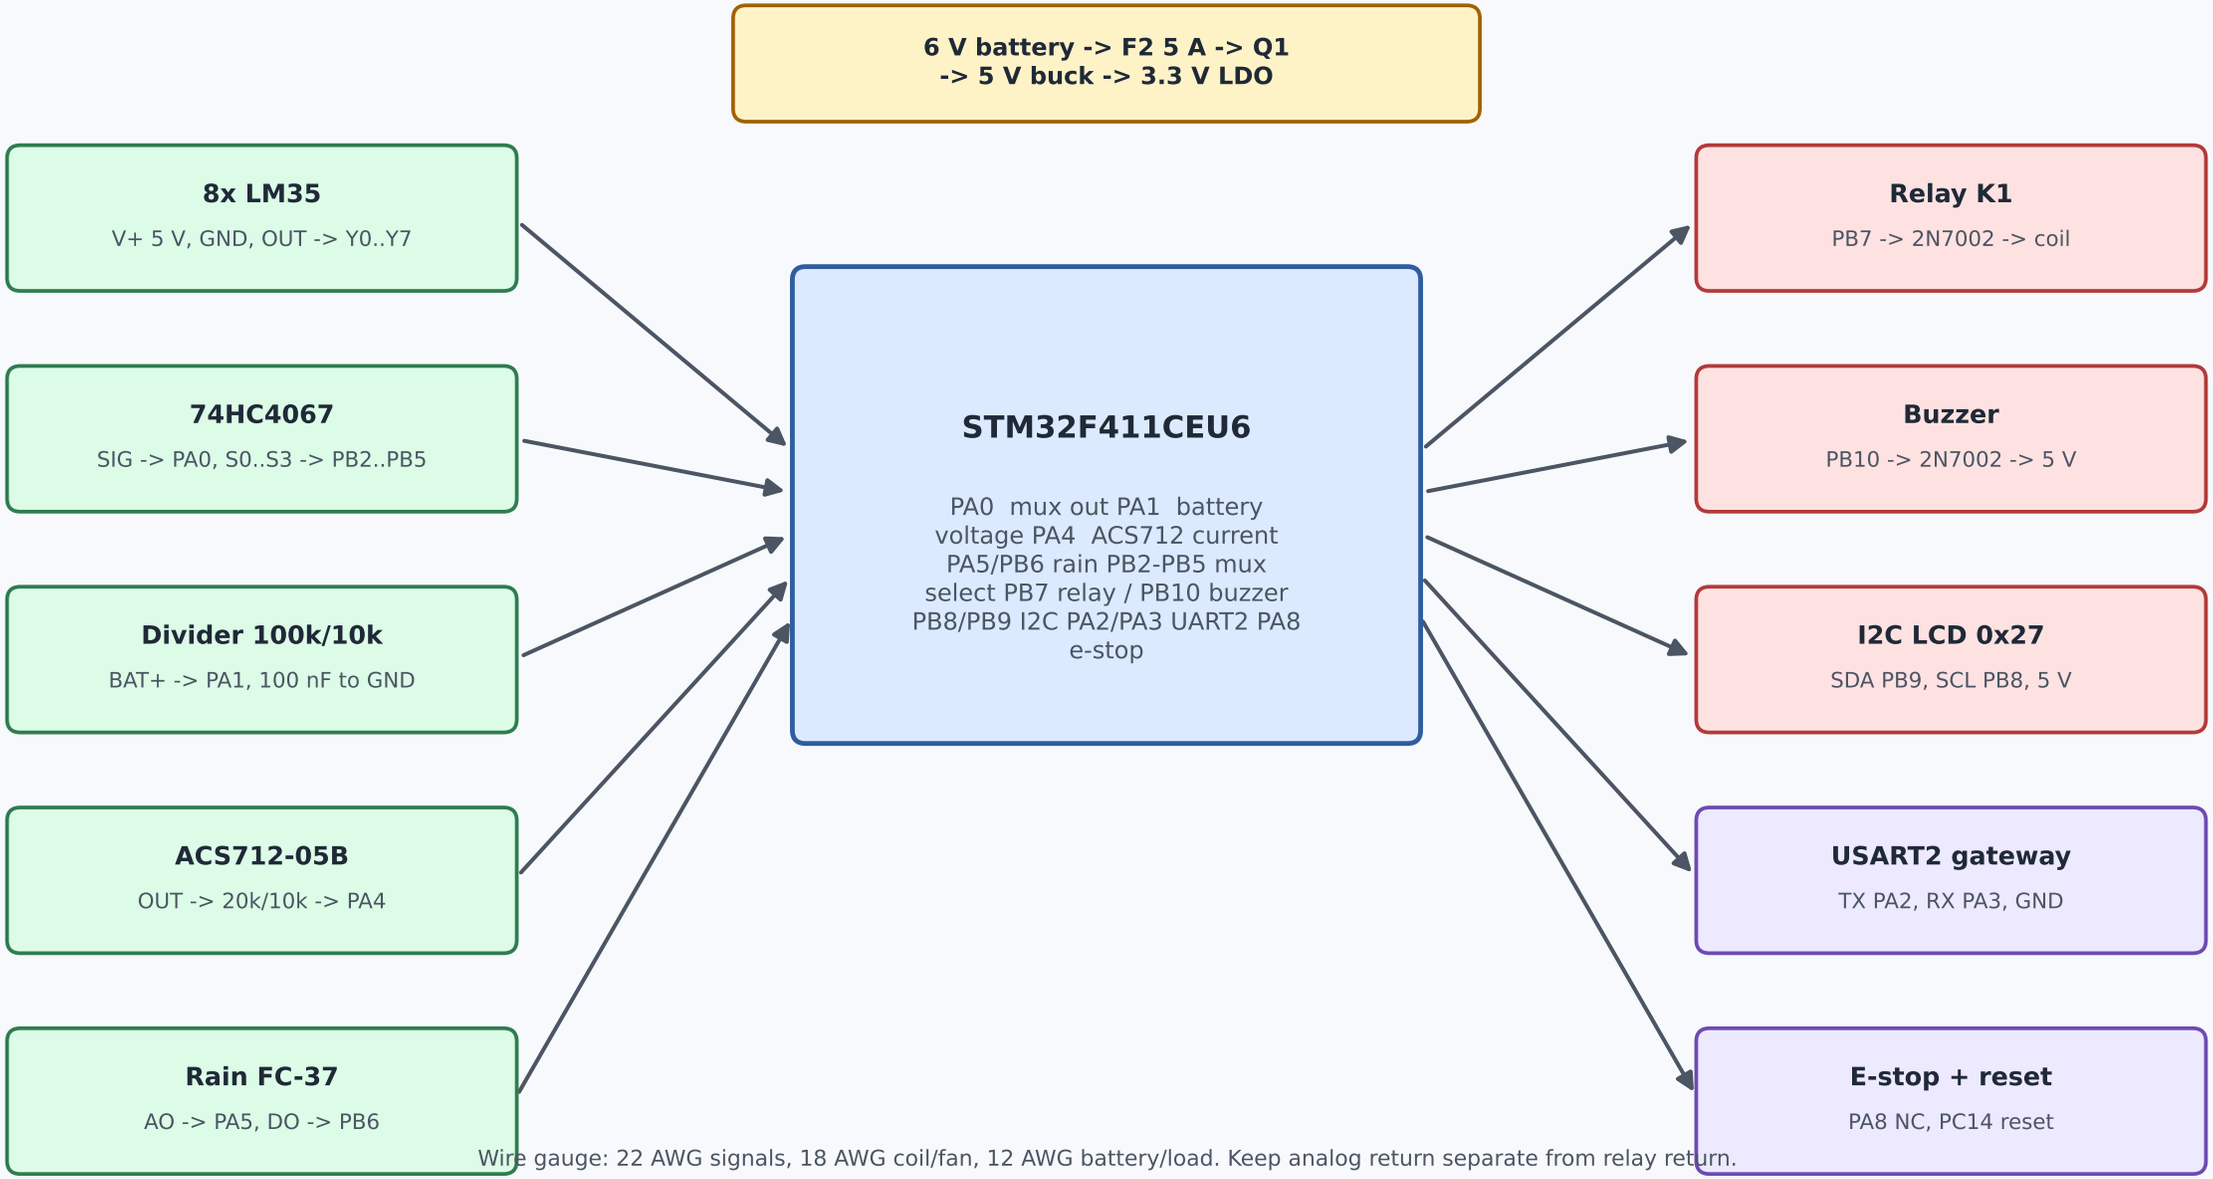

Wire gauge: 22 AWG signals, 18 AWG coil/fan, 12 AWG battery/load. Keep analog return separate from relay return.

Generated by hardware/diagrams/generate_diagrams.py | match the firmware pin map in hardware/wiring/pin_map.csv