Model CMH-RPC
Chilled Mirror Hygrometer

Chilled Mirror
-90°C to +20°C (-130°F to +68°F)



Model CMH-RPC is designed to measure moisture in gas as low as -90°C (-130°F) dewpoint (T_d). It comprises a three stage peltier cooled mirror hygrometer and integral refrigeration unit.

Model CMH-RPC can display concentration at atmospheric pressure or compensate for pressure variations with input from a pressure transducer .

- Primary measurement technique, ideal for laboratory, scientific, research applications and many more.
- Can be configured to include pressure or temperature measurements.

Accuracy to ± 0.2°C dewpoint - Bench or Counter Top Standing - Front panel access to all main components including mirror cleaning - Fast Response - Stable - Reliable - Easy set up.

Features and Technical Specification

Sensor.
- Three Stage Peltier with additional refrigeration.

Manual Balance Control (MBC).
- Automatically corrects for most mirror contaminants.
- Automatically re-balances the optics at switch on.

Programmable Automatic Balance Cycle (PABC)
- Programmable interval of balance control for greatest convenience.
- Increases the length of unattended operation.

8 Line LCD Graphic data display with backlight.
Measurements in °C or °F dewpoint.
%RH, AT, ppm(v) and pressure also available.

Scrolling menu via front panel.

Dual alarm capability
- User programmable.
- Can be set for latching or auto-reset mode.

Serial output
- RS232 communication with terminal, printer, or computer.
- Remote programming.
- Data output such as dew point and alarm status.

Analogue output
0-5 VDC, 4-20 mA, 0-10 VDC, or 0-20mA.
- User scalable to drive peripheral devices.
- Available simultaneously, one output per measurement parameter.
- Scalable throughout the entire operating range of psychometric variables.
- Programme via front panel.

Pressure transducer input for psychometric variable (Optional Extra).

Temperature sensor for RH calculation (Optional Extra).

Power:
110 or 230 VAC, 50/60Hz.(Specified at Order)
Sample Pressure:
0 to 5 bar (0 to 75 psia).
Sample Flow Rate:
0.25 to 2.4 litres/minute (0.5/5.0 SCFH).
Accuracy: +/-0.2°C dewpoint.
Range:
-90°C dewpoint to +20°C dewpoint.
Certificate of Calibration:
Traceable to National/International Humidity Standards.
Dimensions: 600 x 520 x 435mm.
Packed Dimensions: 740 x 680 x 590mm.
Weight: 47 kg.
Packed Weight: 70 kg.

© Alpha Moisture Systems Ltd.


How to Order

Please call us to discuss with our experienced Technical Sales Engineers your exact requirements.

Note: Can be configured to include pressure or temperature measurements.

Please Call +44 (0) 1274 733 100 or Email: info@amsystems.co.uk to discuss your needs.

Model CMH-RPC in more detail

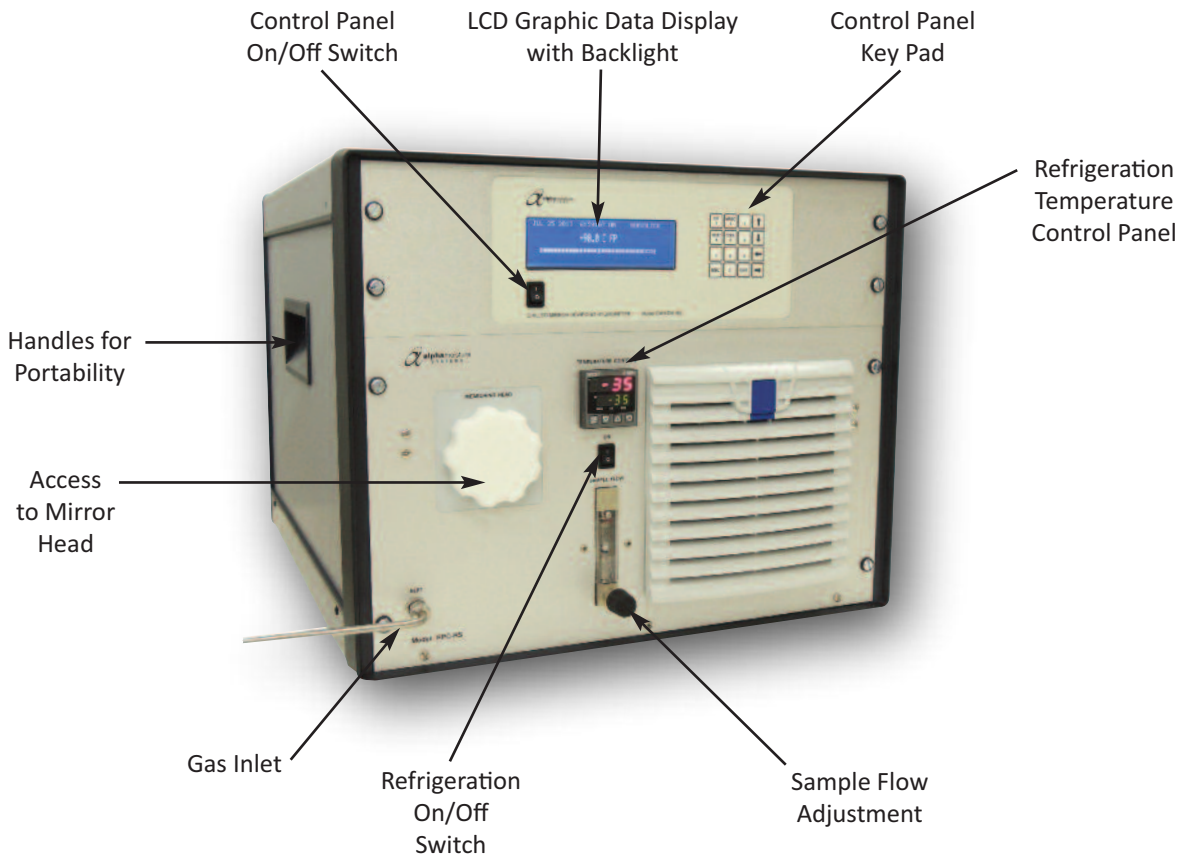

See our websites www.amsystems.co.uk and www.dew-point.com for more Dewpoint Measurement Solutions.

Product specification may be subject to change, without prior notice, as part of our ongoing product development programme.

CERTIFICATE No. FM35600
BS EN ISO 9001:2008

Alpha Moisture Systems Limited.
Registered Office: Alpha House, 96 City Road, Bradford, West Yorkshire, BD8 8ES, UK.

Tel +44 (0) 1274 733100
Fax +44 (0) 1274 733200
Email info@amsystems.co.uk
Website www.amsystems.co.uk

Registered in England and Wales No. 3902302 - VAT Registration No. GB 607 2075 63 - WEEE Producer Registration No. WEEE/EA0067TX

© Alpha Moisture Systems Ltd.