
Single Channel Dew-point Meter

Model : **GMI3000-AMT**

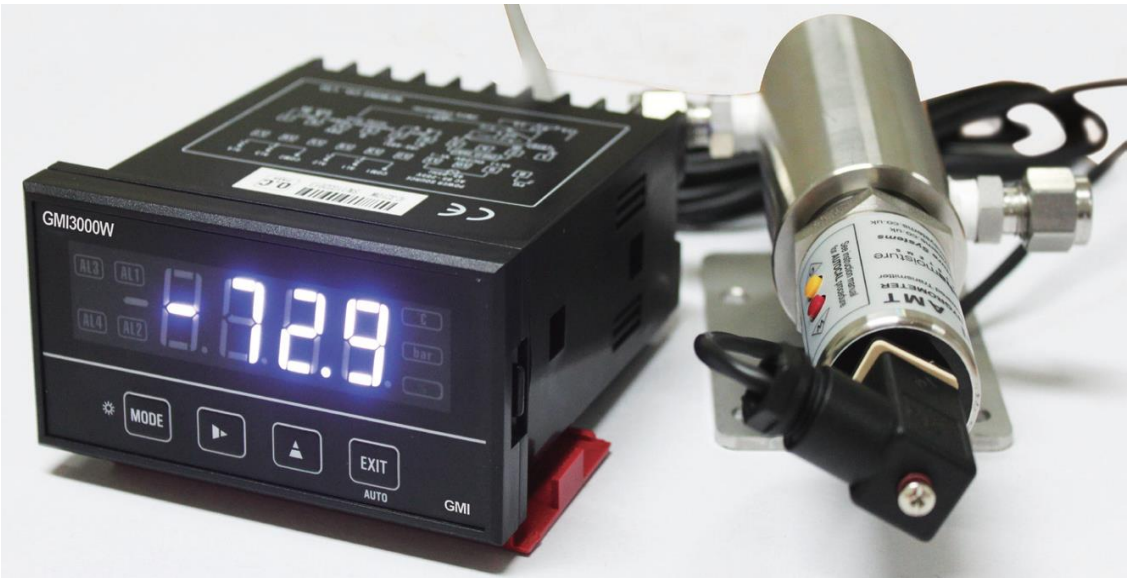

High quality dew-point meter for continuous on-line measurement of dew-point in process gas and dry compressed air, offering powerful functionality and simple interface through advanced digital technology. Combination of advanced digital technology of the display electronics and the sensor makes this the system of choice for a wide range of applications where precise indication, control and monitoring are critical. The long lasting sensing element offers excellent sensitivity, repeatability and response speed - especially on dry down. Integrated electronics in each sensor allows calibration data to be stored within its memory, making sensors completely field Interchangeable. Each sensor is calibrated to provide overall system accuracy of better than ±2°C dew-point and supplied with a certificate traceable to international humidity standards.

Features

•User Friendly & Advanced Functionality

• DISPLA Y in °C Dew-point & °F Dew-point, ppm(v), ppb(v),glm3 or IbslMMSCF

• Power Voltage: AC110/220V (50Hz/60Hz) / by inner Switch

• Linear 4-20mA Retransmission Signal

• 2 Independent, Fully Programmable Alarm Relays

• "AUTOCAL" CALIBRATON FEATURE

• Fast Response

GMI3000 display Indicator Specifications

Enclosure: 1/8 DIN panel mounting ABS case

Display: 4 digit, LED indicator

Display: ℃, ℉, ppm(v), ppb(v), g/m3 or lbs/MMSCF

Power : 110/230 VAC 50/60Hz, 4VA

Output signal: Linear 4 to 20mA, Maximum load 600Ω

Supply Power for Sensor:: DC 24 V, 30mA

Alarms relay output: Two Programmable alarm relay, Normal open. 7A @240VAC/ 7A @30VDC

Weight: 500 grams

Resolution: 16 bit A/D CONVERTER

Size: 96(W) * 48(H) * 112(D) mm

Pannel cutting size: 92(W)*45(H) mm

Maker: GMI Co., Ltd (KOREA)

Sensor Speciations.

Model : AMT

Sensing Element: Ultra High Capacitance - Aluminium Oxide Type

Accuracy: ± 2°C dewpoint (NPL / NIST traceable for range −90°C to +20°C)

AUTOCAL: Field calibration/ Span check facility.

Enclosure Material: 316 Stainless steel body with size C, DIN EN 175301 connector.

Sensor Protection: 316 Sintered stainless steel filter – 50 micron

Operating Pressure: From 1kPa (0.01 barA) to Maximum 35,000kPa (350 barA)

Sample Flow rate: 2 to 5 standard liters. Max: 25 liter/min

Waterproof classification: IP66 / NEMA4X when Connector mated to Transmitter.

Weight: Transmitter and connector – 175grams

Cable: Supplied with 2m length standard two core cable.

Temperature coefficient: Transmitter temperature compensated for operating range.

Repeatability: Better than ±0.3ºC dewpoint

Factory calibration: Supplied with Certificate of Calibration traceable to NPL / NIST

Operating Temperature: −20°C to +60°C

Storage Temperature: −20°C to +70°C

Mechanical Warranty: 24 months in case of faulty workmanship and defective parts.

Calibration Warranty: 12 months9 (not valid if sensor subjected to corrosives or mis-use)

Maker: ALPHA MOISTURE SYSTEMS (U.K)

Ranges:

SDC: −100°C to +20°C dewpoint

LDC: −120°C to +20°C dewpoint

HDC: −65°C to +20°C dewpoint

SPX: 1 to 1000 ppm(v) 1ppm resolution

MPX: 0.1 to 100.0 ppm(v) 0.1ppm resolution

LPX: 0.01 to 10.00 ppm(v) 0.01ppm resolution

PBX: 1 to 1000 ppb(v) 1ppb resolution

Notice: ppm, ppb, g/m3 & lbs/MMSCF are stated at atmospheric pressure.

SENSOR

