

---

# Radio Telescope

## *Project Proposal*

---

PORTLAND STATE UNIVERSITY  
MASEEH COLLEGE OF ENGINEERING & COMPUTER SCIENCE  
DEPARTMENT OF ELECTRICAL & COMPUTER ENGINEERING

*Authors:*

BRADLEY GLAUBITZ

DAVYD GAMZA

DANIYIL KASHKAN

TRUONG LE

PAUL NGUYEN

February 2, 2025



Maseeh College of Engineering  
and Computer Science

PORTLAND STATE UNIVERSITY

ECE 412  
SENIOR PROJECT DEVELOPMENT I  
VERSION 1.5

## Executive Summary

The Rose City Astronomers (RCA) Radio Telescope System is RCA's first educational project related to radio astronomy. It integrates a 3-meter parabolic dish with a horn waveguide, followed by a quarter-wave monopole antenna, a low-noise amplifier (LNA), bandpass filter, and a software-defined radio (SDR) for signal processing. The system interconnects to a laptop or PC running amateur radio astronomy software, enabling users to detect and analyze weak celestial signals in the 1 GHz to 2 GHz frequency range. The intention is to analyze the 1.42 GHz hydrogen line (also referred to as the 21 centimeter line). The system is designed for amateur radio astronomers, educators, and the general public outreach.

Users of the telescope will manually adjust the system to align with celestial objects and optimize signal reception. The LNA amplifies weak signals without introducing any additional noise, and the SDR samples and processes the signal for real-time analysis. The bandpass filter selectively targets frequencies of interest which can be swapped out in a modular fashion. A connected laptop or PC displays the processed data, allowing users to explore celestial phenomena such as the hydrogen 21-cm line in the Milky Way, OH masers, and pulsars in the UHF L Band.

The system will operate at RCA's SkyLark site, supporting both private observations and educational events. It offers hands-on experience with radio astronomy, making the field accessible to both enthusiasts and learners.

## Contents

|  |           |
|--|-----------|
| <b>Executive Summary</b>                   | <b>1</b>  |
| <b>Background and Research</b>             | <b>5</b>  |
| Background . . . . .                       | 6         |
| Research . . . . .                         | 7         |
| <b>Product Design Specification</b>        | <b>12</b> |
| Product Overview . . . . .                 | 13        |
| Stakeholders . . . . .                     | 14        |
| Requirements . . . . .                     | 15        |
| Specifications . . . . .                   | 17        |
| Initial Product Design . . . . .           | 18        |
| Verification Plans . . . . .               | 20        |
| Risks . . . . .                            | 22        |
| Deliverables . . . . .                     | 24        |
| <b>Project Management Plan</b>             | <b>25</b> |
| Timeline, with Milestones . . . . .        | 26        |
| Budget and Resources . . . . .             | 27        |
| Intellectual Property Discussion . . . . . | 28        |
| Team . . . . .                             | 29        |
| Development Tools and Process . . . . .    | 30        |
| <b>Appendix</b>                            | <b>31</b> |
| <b>References</b>                          | <b>35</b> |
| <b>Signature Approval</b>                  | <b>37</b> |

List of Figures

1 3 Meter Dish Example . . . . . 6

2 Commercial 3 Meter Radio Telescope System . . . . . 8

3 Herrmann’s Radio Telescope System . . . . . 13

4 Block Diagrams for RCA Radio Telescope System . . . . . 18

5 Gantt Chart Project Timeline. . . . . 26

6 Noise Power (dBm) VS Temperature ( $K^{\circ}$ ) and Bandwidth (MHz) . . 34

## List of Tables

|   |   |    |
|---|---|----|
| 1 | Component Costs for Radio Telescope Setup . . . . . | 27 |
| 2 | Project Team Members and Their Strengths . . . . .  | 29 |
| 3 | LNA Decision Matrix . . . . .                       | 31 |
| 4 | LNA Criteria with Worst Case Analysis . . . . .     | 31 |
| 5 | SDR Decision Matrix . . . . .                       | 32 |
| 6 | SDR Analysis Table . . . . .                        | 32 |
| 7 | SDR Software Decision Matrix . . . . .              | 33 |
| 8 | SDR Software Analysis Table . . . . .               | 33 |

# Background and Research



## Background and Research

### Background

The sponsor of our capstone project is Rose City Astronomers (RCA), an organization of amateur astronomers in Portland, Oregon, dedicated to promoting education and enjoyment of astronomy to its members and the general public [1]. As a 501(C3) non-profit public benefit organization, RCA sponsors affordable activities, with members volunteering their time, personal equipment, and covering their own personal expenses to support various activities. The proposed project is RCA's first educational project related to radio astronomy. It will initiate exploring suitable equipment for amateur radio astronomy observations and equip RCA with assets to use at its dark sky site and for educational outreach in Greater Portland and other locations [2].

With a one-meter-dish radio telescope system previously built by Michael Caba, an amateur radio astronomer and co-leader of RCA's Radio Astronomy SIG, the project aims to produce a 3-meter-dish radio telescope system operating in the 1-2 GHz range able to observe: 1. Hydrogen 21-cm line in the Milky Way that would allow to plot the galaxy's rotation curve and show dark matter's impact. 2. OH masers. 3. Pulsars in the UHF L Band. The system will include a 3-meter parabolic dish with a horn waveguide, followed by a quarter-wave monopole antenna, a bandpass filter, a low-noise amplifier (LNA) and a software-defined radio (SDR) for signal processing and interfacing with a laptop or PC running amateur radio astronomy software. Based on the videos provided by the sponsors [3 and 4], the system will resemble those shown in **Figure 1**.



**Figure 1:** 3-meter-dish radio telescope systems from the sponsors' videos.

## Research

The research for our capstone includes LNAs, antenna receiver designs, filters, SDRs and software to design a radio telescope with the required characteristics. The videos provided by the sponsors make a good contribution to the research. The 3-meter-dish radio telescope described by Dr. Wolfgang Herrmann [3] has a “Kumar” type horn waveguide made from galvanized steel, which he considers not an ideal but workable solution. For LNA, it uses Triquint (or QORVO) TOPM9037 as the first stage and SPF5189Z as the second stage for extra gain, which does not affect the noise figure coming from the first stage, thus getting the noise figure of 0.4 dB. A weatherproof standard aluminum die cast housing holds the LNA with N-connectors to the horn. The telescope includes a home-built cavity filter made from standard aluminum profile and standard aluminum rods, which Dr. Wolfgang Herrmann recommends as easy to make and good at filtering out the frequency range of interest (1420 MHz for the hydrogen line) when mounted reasonably precisely. For SDRs, to analyze the signal, it uses Analog Devices’ ADALM Pluto, which Dr. Wolfgang Herrmann recommends as fairly gain-stable, though Lime SDR, HackRF, RTL-SDR, SDRPlay, and Airtyspy are other SDR options to use. The telescope uses the in-house developed software based on Soapy-SDR abstraction layer: “Spectrometer\_II” for spectral measurements, and “Continuum\_II” for continuum measurements, both reading pointing information from telescope control. The controller feature is not relevant for our project, since our 3-meter-dish radio telescope is going to be manually controlled. For the mechanical design, Dr. Wolfgang Herrmann puts special emphasis on the support structure to be rigid.

### *Commercial Off-the-Shelf Products*

While researching any commercial off-the-shelf projects that can help with our project, we found an offer for SPIDER 300A MarkII advanced radio telescope, a fully built 3-meter diameter radio telescope for 1420 MHz radio astronomy [5]. It is equipped with all the features desired by our sponsors, including a 3-meter diameter prime focus antenna with specially designed front and rear supports, 1420 MHz optimized feed and 2 LNAs for LHCP and RHCP circular polarization, C106-HEAVY



high load capacity pier for concrete base designed to keep the radio telescope permanently installed in the field, and RadioUniversePRO control and acquisition software for Windows 10/11, designed to control all devices of SPIDER radio telescope and to collect radio astronomy data. Described as powerful but affordable, SPIDER 300A MarkII in **Figure 2** has the price starting at 39,350.00 Euro, VAT excluded, while the system budget provided by the sponsors should not exceed \$1,000.



**Figure 2:** SPIDER 300A MarkII, commercial off-the-shelf 3-meter-dish radio telescope system.

As for SDR options that are commercially available, there are several SDR vendors we mentioned like HackRF, Analog Devices, Airspy, RTLSDR, and SDRPlay. From these vendors, there are 3 products suitable for this project based on the requirements: the Analog Devices ADALM-Pluto, the SDRPlay RSP1B, and the HackRF One. These SDR products are capable of providing the necessary 1-2 GHz frequency range and also are powered directly from USB. The Pluto is an SDR that contains a 12-bit ADC that can provide a sampling rate up to 61.44 MSPS. Also, the Pluto provides a 20 MHz viewable bandwidth, and it is housed in a plastic construction [6]. The SDRPlay RSP1B provides up to 10 MHz bandwidth, a 14-bit ADC that can sample 2 - 6.048 MSPS, and uses a metal construction. The RSP1B performs IQ sampling of the input signal which is first driven through several filters and then passed to the ADC [7]. The HackRF One is an open-source SDR that provides both TX/RX capability from 1 MHz to 6 GHz, a sampling rate up to 20 MSPS at 8-bit resolution, and also uses a metal construction similar to the RSP1B

[8]. The trade-off of the smaller resolution of the HackRF One is that it can sample a much larger frequency range compared to the other 2 SDRs. The HackRF One and the Pluto also include transmission capabilities which is not necessary for the type of application in this project. The price range of these 3 products is from \$100 to \$350, which is around the \$250 budget for the SDR.

### ***Open Source Projects***

While searching for any appropriately licensed open-source projects that can help with our capstone, we found PICTOR, a free-to-use Radio Telescope [9]. Unfortunately, it has a 1.5-meter parabolic dish, not a 3-meter one, but there are schematics and PCB designs, code libraries, and other information that might be useful while designing our radio telescope. This open source project has a GNU General Public License, which allows public use of their designs. The RCA radio telescope project plans to follow the same open source approach.

To complement the SDR we will use in the project, we found several open-source SDR softwares to choose from: SDR++, Virgo, SDRAngel, GQRS, and CubicSDR. A majority of these SDR softwares are GUI-based and have similar functionality of providing the user visual data of SDR readings. The main three softwares to consider in the project will be SDR++, SDRAngel, and GQRS since they're contemporary and are GUI-based. SDR++ is a popular software that provides an easy-to-use GUI, quick connect menu for SDRs, and simple navigation across the RF FFT graph [10]. SDRAngel is the most complex software out of the three, but it includes many additional radio astronomy features such as sky maps, rotator controls, star trackers, and a radio astronomy plugin [11]. GQRS is the simplest software of the three which provides an RF FFT display, draggable window navigation, and the ability to save settings into files for easy configuration [12].

### ***Patents, Papers, White Papers, Articles, Conference Proceedings***

We conducted extensive research across multiple sources, including patent databases, scholarly articles, commercial white papers, and conference proceedings. While we did not find any patents applicable to our project, we identified a few publications that are useful for it.

Chapters 4 and 6 of *The Physical Processes and Observing Techniques of Radio Astronomy: An Introduction* (Pannuti, 2020), a collection of lecture notes from an undergraduate course at Morehead State University, provide several key insights that directly support the design and implementation of our radio telescope project [13]. The explanation of the hydrogen 21-cm line details its emission mechanism, signal characteristics, and significance in studying galactic rotation and dark matter. This ensures the telescope's design parameters, such as frequency range and sensitivity, align with established scientific principles. The chapters cover critical antenna design considerations, including dish size, horn configurations, and beamwidth calculations, essential for optimizing signal reception. The overview of various SDR architectures, digital signal processing techniques, and the impact of sampling rates and bit-depth on data quality directly informs component selection and system integration in the telescope's signal processing chain. Noise reduction and calibration techniques from the book have practical applications in the project. The described methods for mitigating thermal noise, atmospheric interference, and radio frequency interference (RFI) are key challenges in ensuring high signal-to-noise ratio (SNR) observations. Techniques such as LNA selection, shielding strategies, and filtering approaches can improve the telescope's ability to detect weak celestial signals.

The article "Techniques of Radio Astronomy" by T. L. Wilson provides a technical overview of radio astronomy methodologies relevant to our radio telescope project [14]. It covers key aspects of signal detection, data processing, and analysis, offering insights that inform design choices for the telescope's signal acquisition chain, including LNA selection and SDR-based signal digitization. The project's goal of detecting weak celestial signals aligns with the article's discussion of spectral line observations and receiver calibration techniques, ensuring that the system can achieve the necessary sensitivity and frequency resolution for accurate data collection. The discussion of aperture synthesis and interferometric techniques provides valuable context for improving angular resolution and signal processing. The principles of phase-coherent observations and correlation techniques can be adapted to enhance signal extraction and noise reduction. The article explains how interferometric arrays achieve high-resolution imaging, and the use of Fourier transforms to analyze visibility data and reconstruct radio images informs the software implementation of the telescope's

SDR processing pipeline, particularly for spectral analysis and source detection. It also addresses the impact of atmospheric and instrumental noise on radio astronomical observations, critical for system performance and calibration. Techniques such as hot-cold load calibration, phase correction, and atmospheric modeling, detailed in the text, provide strategies to improve measurement accuracy. Furthermore, the importance of site selection and environmental considerations, such as shielding the receiver from terrestrial interference, aligns with the project's goal of operating the telescope at an optimal dark-sky location.

The document "Interactive Lab to Learn Radio Astronomy, Microwave & Antenna Engineering" presents an initiative at the Technical University of Cartagena (UPCT) to develop a small radio telescope (SRT) and an associated laboratory, emphasizing student involvement in designing, constructing, and operating a 3-meter parabolic dish antenna system [15]. It integrates a Low Noise Block (LNB) to amplify and filter received signals, which are transmitted via high-quality coaxial cable for further processing. The SRT follows common design principles in amateur and educational radio telescope development, particularly in capturing and analyzing celestial signals such as the hydrogen line at 1.42 GHz. It addresses key technical challenges, including minimizing noise in amplification stages and ensuring precise signal transmission. The setup includes software-controlled antenna positioning and real-time data acquisition, with remotely controlled engines adjusting azimuth and elevation for accurate celestial tracking. The software interface processes received signals and provides visualization tools for analysis. SDR technology enhances flexibility in signal processing, improving the system's capability to detect and interpret weak astronomical signals. A dual-receiver setup supports both commercial and student-designed analog RF receivers: the commercial receiver provides reliability and baseline performance, while the student-designed system functions as a hands-on learning tool. Multiple test points allow students to analyze RF signals using spectrum analyzers and oscilloscopes, reinforcing key principles of high-frequency signal processing. The system's modular design enables iterative improvements, ensuring that the system remains adaptable for future modifications. The focus on student-led development aligns with best practices in engineering education, combining theoretical coursework with practical implementation, which is directly applicable to our project.

# Product Design Specification



**Maseeh College of Engineering  
and Computer Science**

PORTLAND STATE UNIVERSITY

# Product Design Specification

## Product Overview

The RCA Radio Telescope System combines a 3-meter parabolic dish with horn waveguide, provided by the sponsor, followed by a quarter wave monopole antenna, band-pass filter, a low-noise amplifier (LNA), and a software-defined radio (SDR) for signal processing and interfacing with a laptop or PC running amateur radio astronomy software to detect and analyze weak celestial signals in the 1 GHz to 2 GHz frequency range. We will create the radio telescope system for amateur radio astronomers, educators, and the general public outreach. Users will manually adjust the antenna for optimal signal reception. The LNA amplifies weak signals, which are then sampled and undergo signal processing by the SDR for real-time analysis. The bandpass filter selectively targets frequencies of interest which can be swapped out in a modular fashion. The data is displayed on a laptop or PC for visualization and further analysis, enabling users to explore phenomena like the hydrogen 21-cm line in the Milky Way at 1.42 GHz, OH masers, and pulsars in the UHF L Band. The system will work for both private observations at RCA's SkyLark site and for educational events, offering hands-on experience with radio astronomy. The final product takes inspiration from the one described by Dr. Wolfgang Herrmann [3] in **Figure 3**.



**Figure 3:** Dr. Wolfgang Herrmann's 3-meter-dish radio telescope system.

## Stakeholders

### **Industry Sponsors:**

- Art Koehler
- Michael Caba
- Matthew Vartanian
- Mark Martin
- Ken Hose

### **Users of the product:**

- Rose City Astronomers members
- The general public

### **Faculty advisors:**

- Andrew Greenberg
- Joshua Mendez

### **Project team members:**

- Brad Glaubitz
- Davyd Gamza
- Daniyil Kashkan
- Truong Le
- Paul Nguyen

## Requirements

### Must:

- Must display real-time signal data on a laptop or PC interface.
- Must generate data for weak celestial signals with sufficient signal-to-noise ratio ( $\text{SNR} \geq 20:1$ ).
- Must be able to interface with a software-defined radio (SDR) for signal acquisition.
- Must have a low-noise amplifier (LNA) with a noise figure  $\leq 0.7$  dB at 1 GHz to 2 GHz.
- Must provide an intuitive software interface for real-time data visualization and analysis.
- Must consume  $\leq 50$  watts per hour, with a total power consumption of  $\leq 600$  watts over 12 hours of continuous use.

### Should:

- Should have a low-noise amplifier (LNA) with a gain of at least  $\geq 30$  dB for the 1 GHz to 2 GHz frequency range.
- Should not exceed the total project budget of \$800 in component costs.
- Should utilize a 12 V DC power system for compatibility with on-site solar power and battery backups.
- Should use cross-compatible SDR software to support multiple platforms (Windows, Linux, macOS).



**May:**

- May operate in various environmental conditions, with a temperature range of  $-25^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ , with appropriate passive cooling.
- May utilize solar power available on-site at SkyLark for extended functionality.
- May run off of a car battery for portability at dark-sky sites.

## Specifications


The specifications for the Radio Telescope project are driven with a few goals outlined in the requirements above. To summarize, we'd like to maintain low noise, a good signal to noise ratio (SNR), and utilize software-defined radio (SDR).

### Technical Specifications

- Processor - Analog Devices AD9363 and Xilinx Zynq Z-7010 FPGA (SDR)
- Sensor - Quarter wave monopole antenna
- Actuators - ADALM-PLUTO (SDR), ZX-60 (LNA), Bandpass Filter
- Power Source - 12V DC
- Mechanical Design - Modular system shielded from external noise using coaxial cables and conductive housings.

## Initial Product Design

### Hardware Architecture

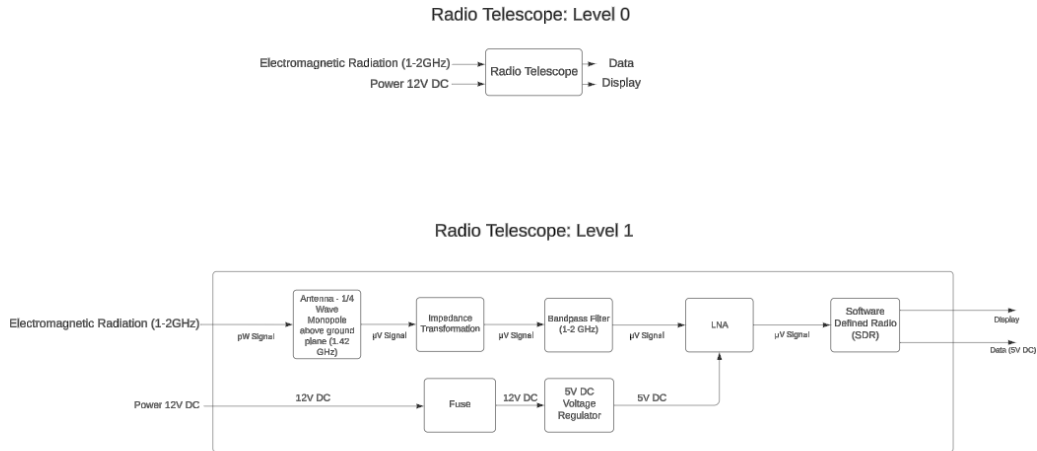

**Figure 4:** Level 0 and 1 block diagrams of the Radio Telescope System.

### Software Architecture

For the development environment, we will use LaTeX to create the user manual documentation and manage its version control with GitHub.

### User Interface / Experience

To set up the system for observation, the user will identify a particular object they want to observe. Based on their selection, they will attach the respective modular monopole antenna and band-pass filter that corresponds to that object to the system.

Then, the user interacts with the SDR's sample data through the SDR software. When the user opens the software on their computer, it prompts them to select the source device to begin sampling. The user connects the SDR device to the computer using a USB interface that is attached to the SDR. During the initial setup, the software may require the user to install additional drivers to recognize the device. The software displays an FFT graph that visualizes the signals across a frequency

spectrum and its strength on a decibel scale. It also allows the user to select a tuning frequency for detailed analysis. The user can record and capture screenshots of their sampling data for future reference.

## Verification Plans

A testing procedure for the RCA Radio Telescope System should ensure the functionality and accuracy of all components, as well as the system's ability to detect and process celestial signals. Here's an outline of a potential testing procedure.

### Testing Procedure for the RCA Radio Telescope System:

- **Visual Inspection:** Check the parabolic dish for physical damage, misalignment, or debris. Inspect the waveguide feed, low-noise amplifier (LNA), and software-defined radio (SDR) for proper connections and secure mounting. Verify the integrity of all cables and connectors, ensuring there are no breaks or loose connections.
- **Power and Signal Flow Check:** Power on the system components (LNA, SDR, laptop/PC). Verify the LNA receives power and amplifies signals by checking voltage levels or using a signal generator and oscilloscope. Confirm the SDR initializes correctly and interfaces with the laptop or PC without errors.
- **Calibration:** Use a known signal source (e.g., a calibrated signal generator) to simulate a weak signal within the 1 GHz to 2 GHz range. Adjust the system to ensure the detected signal matches the input frequency, amplitude, and characteristics. Record and verify the system's response to signals of varying strengths and frequencies to confirm linearity and sensitivity.
- **Antenna Alignment Test:** Point the antenna at an orbital source, such as a geostationary satellite, with a known signal (e.g., weather satellites or communication satellites within the system's L Band frequency range). Measure the signal strength and adjust the antenna manually to verify the alignment process and optimize reception.

- **Celestial Signal Detection:** Point the telescope toward a strong celestial source, such as the Sun, to confirm it detects expected signals. Test the system's ability to observe the hydrogen 21-cm line at 1.42 GHz by pointing it toward the Milky Way's plane. Log signal strength, frequency spectrum, and any detected features.
- **Software and Data Analysis Verification:** Open the SDR software on the laptop or PC. Confirm that the software processes and displays the signal data in real-time (e.g., frequency spectrum, time-domain signals). Analyze the displayed data to ensure accurate representation of input signals.
- **Long-Term Stability Test:** Operate the system continuously for a set period (e.g., 24–48 hours) to monitor stability and detect any thermal drift or noise issues. Evaluate signal consistency and identify potential interference or environmental factors affecting performance.
- **Outreach and Educational Simulation:** Simulate an educational event by guiding users through the setup, alignment, and signal analysis process. Verify the ease of use and the ability to detect and interpret meaningful signals.
- **Documentation and Reporting:** Record all test results, including screenshots of the software interface and any measured values. Identify any issues or inconsistencies, and propose solutions or adjustments.
- **Final Performance Verification:** Revisit all critical tests (e.g., signal detection, software processing, and alignment) to confirm optimal performance before operational use.

## Risks

### Technical Risks:

- Ensuring the LNA noise figure is maintained at  $\leq 0.7$  dB.
- Ensuring SNR  $\geq 20:1$

### Budget Constraints:

- Components such as the LNA and SDR must be sourced cost-effectively to stay within the given budget limit from Sponsors.

### Environmental Constraints:

- Wind and temperature stability of the dish system, ensuring robustness in the field.

### Design Constraints:

- No cryogenic cooling or extreme temperature control systems will be incorporated into the system other than components such as heat sinks if it is necessary for design.
- The system should be modular and scalable for future upgrades or integration into other radio astronomy systems utilizing screw together connectors.
- Reducing any external noise interference.
- Anticipate that the final project report will be submitted to the “Radio Astronomy, Journal of the Society of Amateur Radio Astronomy.”
- Anticipate presenting the design, prototype performance, and project lessons learned at a General Meeting of the Rose City Astronomers. This is to be scheduled with Mark Martin, Teaching Assistant Professor, PSU.
- The design shall be documented, open source, accessible via arXiv, GitHub, or another reputable open-source server.

**Expected Challenges and Risk Mitigation:**

- **Component Availability:** Limited availability of specialized components might affect the timeline. Mitigation: Identify alternative components and commercial off the shelf subsystems early in the design process.
- **Prototype Performance:** Achieving the target performance metrics (gain, noise figure, etc.) within the specified cost may be challenging. Mitigation: Extensive simulation and design optimization will help reduce the number of prototype iterations required.
- **Budget Constraints:** Ensuring the BOM stays under the given Sponsor budget could require strategic selection of components. Mitigation: Focus on cost-effective transistors and minimize the use of expensive specialized components.



## Deliverables

By the end of our capstone, we are going to deliver to our industry sponsor:

- Project Proposal
- Weekly Progress Reports
- Final Report
- ECE Capstone Poster Session poster
- Detailed design documentation, explaining what our design does, how it works, and why we've made such decisions
- Simulations, including both the simulation inputs and outputs
- Bill of materials and pricing
- Version control, including checked in previous revisions of our design (GitHub repo)
- A working prototype

The deliverables can be accessed via our GitHub repo and Google Drive.

# Project Management Plan




**Maseeh College of Engineering  
and Computer Science**

PORTLAND STATE UNIVERSITY

# Project Management Plan

## Timeline, with Milestones

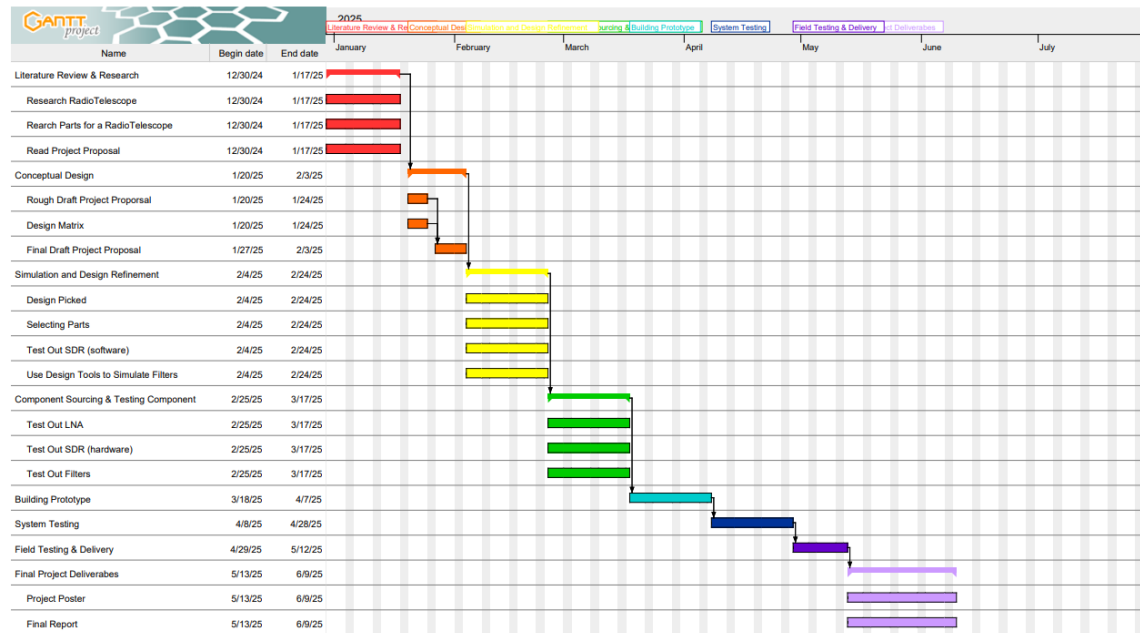

**Figure 5:** Gantt Chart Project Timeline.

Note: Gantt Chart to be updated throughout the term to represent the timeline better. The timeline can be shifted from 1 to 2 weeks due to unforeseen problems that can occur.

## Budget and Resources

**Total Estimated BOM Cost: \$800**

| Component                              | Estimated Cost (USD) |
|--|----------------------|
| Low-Noise Amplifier (COTS components)  | \$150                |
| Filtering                              | \$150                |
| $\frac{1}{4}\lambda$ Monopole Antenna  | \$100                |
| Software-Defined Radio (SDR)           | \$250                |
| Shielded Coaxial Cables and Connectors | \$100                |
| Miscellaneous                          | \$50                 |

**Table 1:** Component Costs for Radio Telescope Setup

### Resources:

- EPL (PSU)
- Capstone Lab (PSU)
- Locker (PSU)

## Intellectual Property Discussion

The Radio Telescope capstone project will use an open-source framework for its design and implementation. This approach aligns with the values of RCA and the goals of the project by promoting transparency, accessibility, and collaboration. The team shares all designs, schematics, software, and documentation publicly on GitHub under suitable open-source licenses. This ensures that the project becomes a valuable educational tool for the amateur astronomy community while allowing others to build on or adapt it for their own use. Keeping the project open-source empowers amateur radio astronomers and educators and encourages innovation in radio astronomy. RCA representatives have shown support for this approach because it simplifies collaboration and increases the project's impact.

## Team

Project team members:

- Brad Glaubitz (Main Communicator)
- Davyd Gamza
- Daniyil Kashkan
- Truong Le
- Paul Nguyen

| Name    | Strengths   |
|---------|---|
| Brad    | Analog & Radio Frequency Design, Antenna Design, Optics, Python, C, MatLab, Soldering, Fabrication, PCB Layout and design, Schematics   |
| Davyd   | Power systems, linguistics, soldering, welding, metal-working, general handiwork  |
| Daniyil | Documentation, formatting, organization, presentation, proofreading, communication (email, Discord, calls, etc.), programming (Python, MATLAB), soldering                           |
| Truong  | Programming (C/Assembly/Python), read/make documentation, review other people's work, microsoldering/soldering, 3D modeling (Fusion 360) and 3D printing, schematic layout/planning |
| Paul    | Documentation, Soldering, PCB Layout and Design, Schematics   |

**Table 2:** Project Team Members and Their Strengths

## Development Tools and Process

To get the project done, it is likely the following tools will be used:

- **Agile Method using Sprints**
  - We plan to gather research, calculations, and simulations to serve as a basis for the selection of parts. This data will be provided in a separate document to show the team's conclusions on what specifications are needed in the part-selection process.
  - Once components are selected, the parts are integrated into a complete system as the initial sprint. This system will be tested to see if it coincides with our prior data. If any issues arise from the assessment, we will proceed with another sprint to resolve those issues.
- Discord for regular team meetings and for meetings with the Faculty Advisor
- Microsoft Teams for weekly meetings with the Industry Sponsor
- Google Drive for sharing all project-related documentation
- GitHub as a repo for files and code
- Virtual Network Analyzer (VNA)
- Function Generators
- Python
- SDR Software
- Keysight ADS
- KiCad

## Appendix

| LNA               |        |             |             |      |
|-------------------|--------|-------------|-------------|------|
| Criteria          | Weight | SAWbird+ H1 | ZRL-2400LN+ | ZX60 |
| Gain              | 4      | 5           | 4           | 3    |
| Power Consumption | 2      | 4           | 1           | 5    |
| Noise Figure      | 5      | 4           | 3           | 5    |
| Bandwidth         | 4      | 2           | 5           | 5    |
| Cost              | 3      | 5           | 2           | 3    |
| Power Supply      | 1      | 2           | 5           | 2    |
| Score             |        | 73          | 64          | 78   |

**Table 3:** LNA Decision Matrix

| Criteria          | SAWbird+ H1       | ZRL-2400LN+  | ZX60           |
|-------------------|-------------------|--------------|----------------|
| Gain              | 42 (dB)           | 24 (dB)      | 12.4 (dB)      |
| Power Consumption | 0.75 Watts        | 5.64 Watts   | 0.5 Watts      |
| Noise Figure      | 0.9 (dB)          | 2.0 dB       | 0.7 (dB)       |
| Bandwidth         | 1376MHz - 1441MHz | 1GHz - 2 GHz | 400 MHz - 3GHz |
| Power Supply      | 5V                | 12-17V       | 3V-5V          |
| Noise Temperature | NA                | NA           | NA             |
| Cost              | \$44.95           | \$177.03     | \$145.41       |

**Table 4:** LNA Criteria with Worst Case Analysis



| SDR                    |        |            |               |             |
|------------------------|--------|------------|---------------|-------------|
| Criteria               | Weight | HackRF One | SDRPlay RSP1B | ADALM-Pluto |
| Signal Resolution      | 5      | 3          | 5             | 4           |
| Sampling Rate          | 5      | 4          | 3             | 5           |
| Frequency Coverage     | 2      | 5          | 3             | 4           |
| Viewable Bandwidth     | 3      | 5          | 3             | 5           |
| Open Source / Software | 2      | 5          | 3             | 4           |
| Construction           | 2      | 5          | 5             | 3           |
| Cost                   | 3      | 1          | 5             | 3           |
| Score                  |        | 83         | 86            | 91          |

**Table 5:** SDR Decision Matrix

| Criteria                    | HackRF One        | SDRPlay RSP1B                 | ADALM-Pluto             |
|-----------------------------|-------------------|-------------------------------|-------------------------|
| Signal Resolution           | 8 bit ADC         | 14 bit ADC                    | 12-bit ADC              |
| Sampling Rate               | 2 Msps - 20 Msps  | 2 – 6.048MSPS (Native)        | 65.2 kSPS to 61.44 MSPS |
| Frequency Coverage          | 1 MHz to 6 GHz    | 1 kHz to 2 GHz                | 325 MHz to 3.8 GHz      |
| Viewable Bandwidth          | 20 MHz            | 10 MHz                        | 20 MHz                  |
| Construction                | Metal             | Metal                         | Plastic                 |
| Compatibility with Software | Mostly compatible | Requires additional libraries | Mostly compatible       |
| Cost                        | \$340             | \$133                         | \$233                   |


**Table 6:** SDR Analysis Table

| SDR Software           |        |          |       |      |
|------------------------|--------|----------|-------|------|
| Criteria               | Weight | SDRAngel | SDR++ | GQRX |
| Ease of Use/UI         | 3      | 2        | 4     | 5    |
| Features/Expandability | 5      | 5        | 3     | 2    |
| Recent Revisioning     | 3      | 5        | 4     | 2    |
| Score                  |        | 46       | 39    | 31   |

**Table 7:** SDR Software Decision Matrix

| Criteria                             | SDRAngel  | SDR++   | GQRX   |
|--------------------------------------|---|---|--|
| <b>Ease of Use/UI</b>                | Most difficult, need to add interface windows for specific features, more of a canvas-style tool that can be configured to user's liking. | Bit more difficult to get used to, UI is understandable to navigate.  | Very easy to use, UI is simple.  |
| <b>Features and/or Expandability</b> | Best feature set compared to others, has special features for radio astronomy (rotator controls, skymaps, radio astronomy viewer).        | Medium-low feature set, has similar features as GQRX but in a more presentable manner. Highlights common frequency ranges for HAM, FM, AM, etc. | Small feature set, really only meant for listening to radio waves. Lack of features may limit the expandability of the project later on. |
| <b>Recent Revisioning</b>            | Dec 4, 2024 (As of 1/24/2025), Roughly Monthly Updates  | Jan 3, 2025 (As of 1/24/2025), Nightly Builds   | Nov 29, 2024 (As of 1/24/2025), updates semi-quarterly.  |
| <b>Cost</b>                          | FREE  | FREE  | FREE   |

**Table 8:** SDR Software Analysis Table

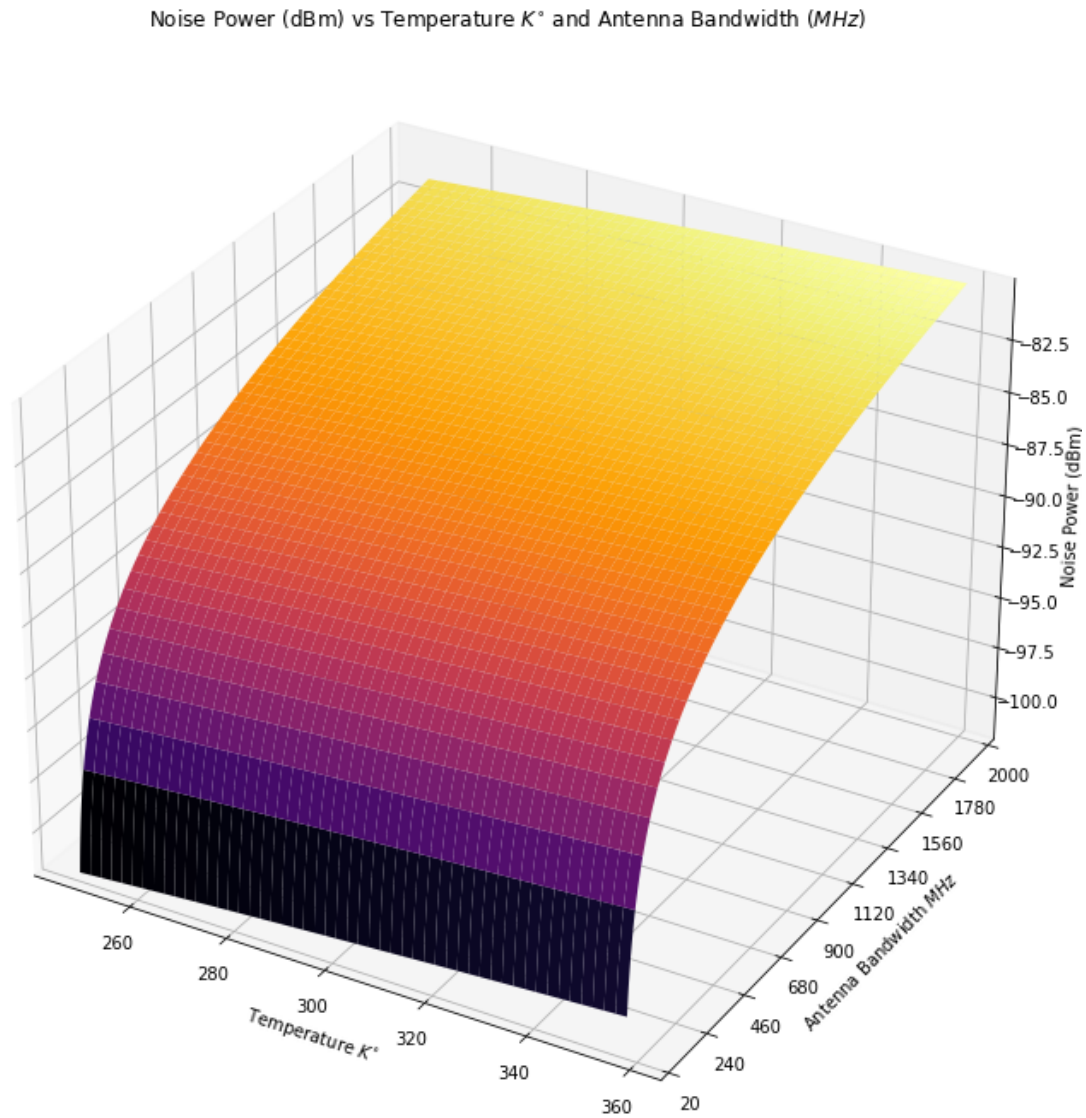

**Figure 6:** The relationship between noise power (dBm) versus temperature ( $K^\circ$ ) and antenna bandwidth (MHz) for a Radio Telescope System.

## References

- [1] RCA. <https://www.rosecityastronomers.net/new-events-1> (accessed Jan. 19, 2025).
- [2] Project Proposal: Senior Engineering Capstone Design Project. Design and Build of a Radio Telescope System for 1 GHz to 2 GHz Operation. *RCA*. (accessed Jan. 19, 2025).
- [3] Dr. Wolfgang Herrmann. Building Small/Medium Size Radio Telescopes. [Online video]. Available: <https://www.youtube.com/watch?v=BcsYIM3FhKY&list=PL0gh0Mfq7afMzufQk6mN4VZMEQsAJYDyu&index=5> (accessed Jan. 20, 2025).
- [4] Dr. Wolfgang Herrmann. Keynote Amateur Radio Astronomy Possibilities and Limitations, Do's and Don'ts. [Online video]. Available: <https://www.youtube.com/watch?v=8j1bVpC6M94&list=PL0gh0Mfq7afMzufQk6mN4VZMEQsAJYDyu&index=4> (accessed Jan. 20, 2025).
- [5] PrimaLuceLab. <https://www.primalucelab.com/radio-telescopes-for-radio-astronomy/spider-300a-markii-30-meter-diameter-advanced-radio-telescope.html> (accessed Jan. 20, 2025).
- [6] Analog Devices, “ADALM-PLUTO Evaluation Board — Analog Devices,” *Analog.com*, 2024. <https://www.analog.com/en/resources/evaluation-hardware-and-software/evaluation-boards-kits/adalm-pluto.html> (accessed Jan. 24, 2025).
- [7] SDRPlay, “RSP1B - SDRplay,” *SDRplay*, Aug. 28, 2024. <https://www.sdrplay.com/rsp1b/> (accessed Jan. 24, 2025).
- [8] Great Scott Gadgets, “HackRF,” *GitHub*, Jan. 04, 2023. <https://github.com/greatscottgadgets/hackrf> (accessed Jan. 24, 2025).

- [9] PICTOR. <https://github.com/0xCoto/PICTOR?tab=readme-ov-file> (accessed Jan. 20, 2025).
- [10] AlexandreRouma, “SDRPlusPlus: Cross-Platform SDR Software,” *GitHub*, Nov. 22, 2022. <https://github.com/AlexandreRouma/SDRPlusPlus> (accessed Jan. 24, 2025).
- [11] E. Griffiths, “SDRAngel,” *GitHub*, Feb. 02, 2024. <https://github.com/f4exb/sdrangel> (accessed Jan. 24, 2025).
- [12] gqrx-sdr, “GQRX: Software defined radio receiver powered by GNU Radio and Qt.,” *GitHub*, Nov. 30, 2024. <https://github.com/gqrx-sdr/gqrx> (accessed Jan. 24, 2025).
- [13] Pannuti, T. G. (2020). *The Physical Processes and Observing Techniques of Radio Astronomy: An Introduction*. Springer. ISBN: 978-3-319-16981-1.
- [14] Wilson, T. L. (2013). Techniques of Radio Astronomy. *In Tools of Radio Astronomy* (pp. 283–400). Springer.
- [15] J. L. Gómez-Tornero, D. Cañete-Rebenaque, F. D. Quesada-Pereira, and A. Álvarez-Melcón, “Interactive Lab to Learn Radio Astronomy, Microwave & Antenna Engineering at the Technical University of Cartagena (Spain),” *International Journal of Online Engineering*, vol. 7, no. 1, pp. 10–18, Feb. 2011.

## Signature Approval

Industry Sponsor

Faculty Advisor

Capstone Team