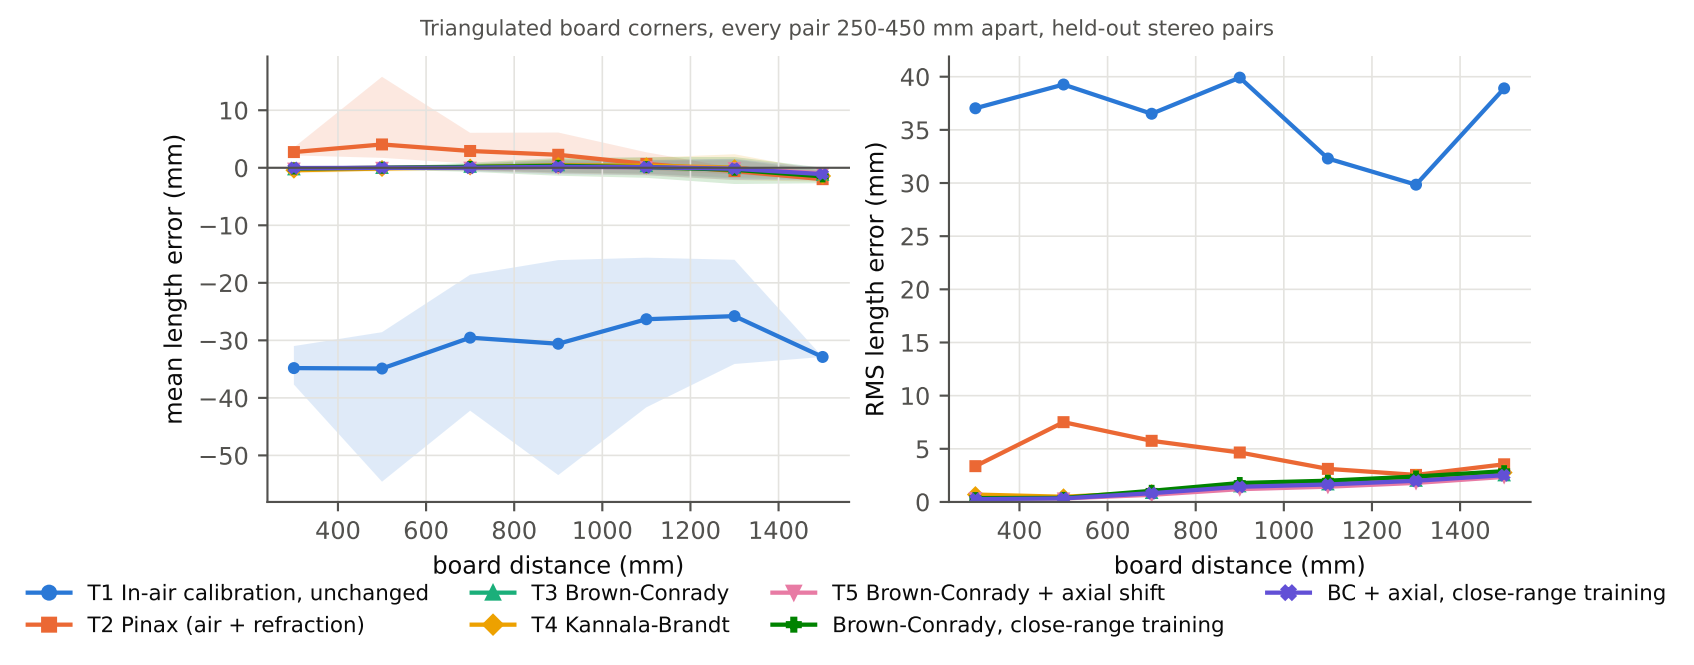
Triangulated board corners, every pair 250-450 mm apart, held-out stereo pairs
mean length error (mm)
10
0
−10
−20
−30
−40
−50
400
600
800
1000
1200
1400
board distance (mm)
RMS length error (mm)
40
35
30
25
20
15
10
5
0
400
600
800
1000
1200
1400
board distance (mm)
T1 In-air calibration, unchanged
T2 Pinax (air + refraction)
T3 Brown-Conrady
T4 Kannala-Brandt
T5 Brown-Conrady + axial shift
Brown-Conrady, close-range training
BC + axial, close-range training