



1. Description

1.1. Project

Project Name	IdrfixedL431
Board Name	custom
Generated with:	STM32CubeMX 6.3.0
Date	06/18/2024


1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x1
MCU name	STM32L431RBTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

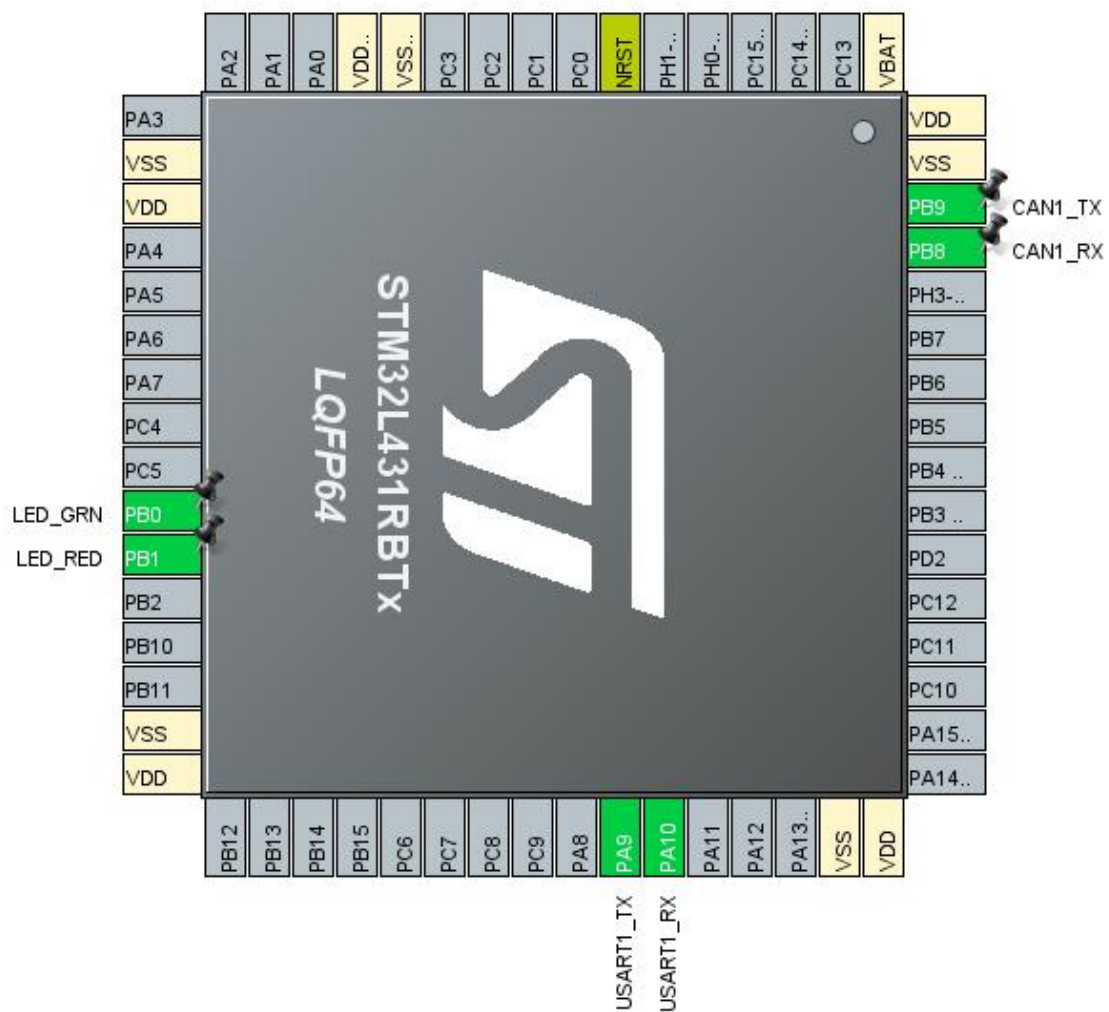


(Rotated +90°)

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
18	VSS	Power		
19	VDD	Power		
26	PB0 *	I/O	GPIO_Output	LED_GRN
27	PB1 *	I/O	GPIO_Output	LED_RED
31	VSS	Power		
32	VDD	Power		
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
47	VSS	Power		
48	VDD	Power		
61	PB8	I/O	CAN1_RX	
62	PB9	I/O	CAN1_TX	
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

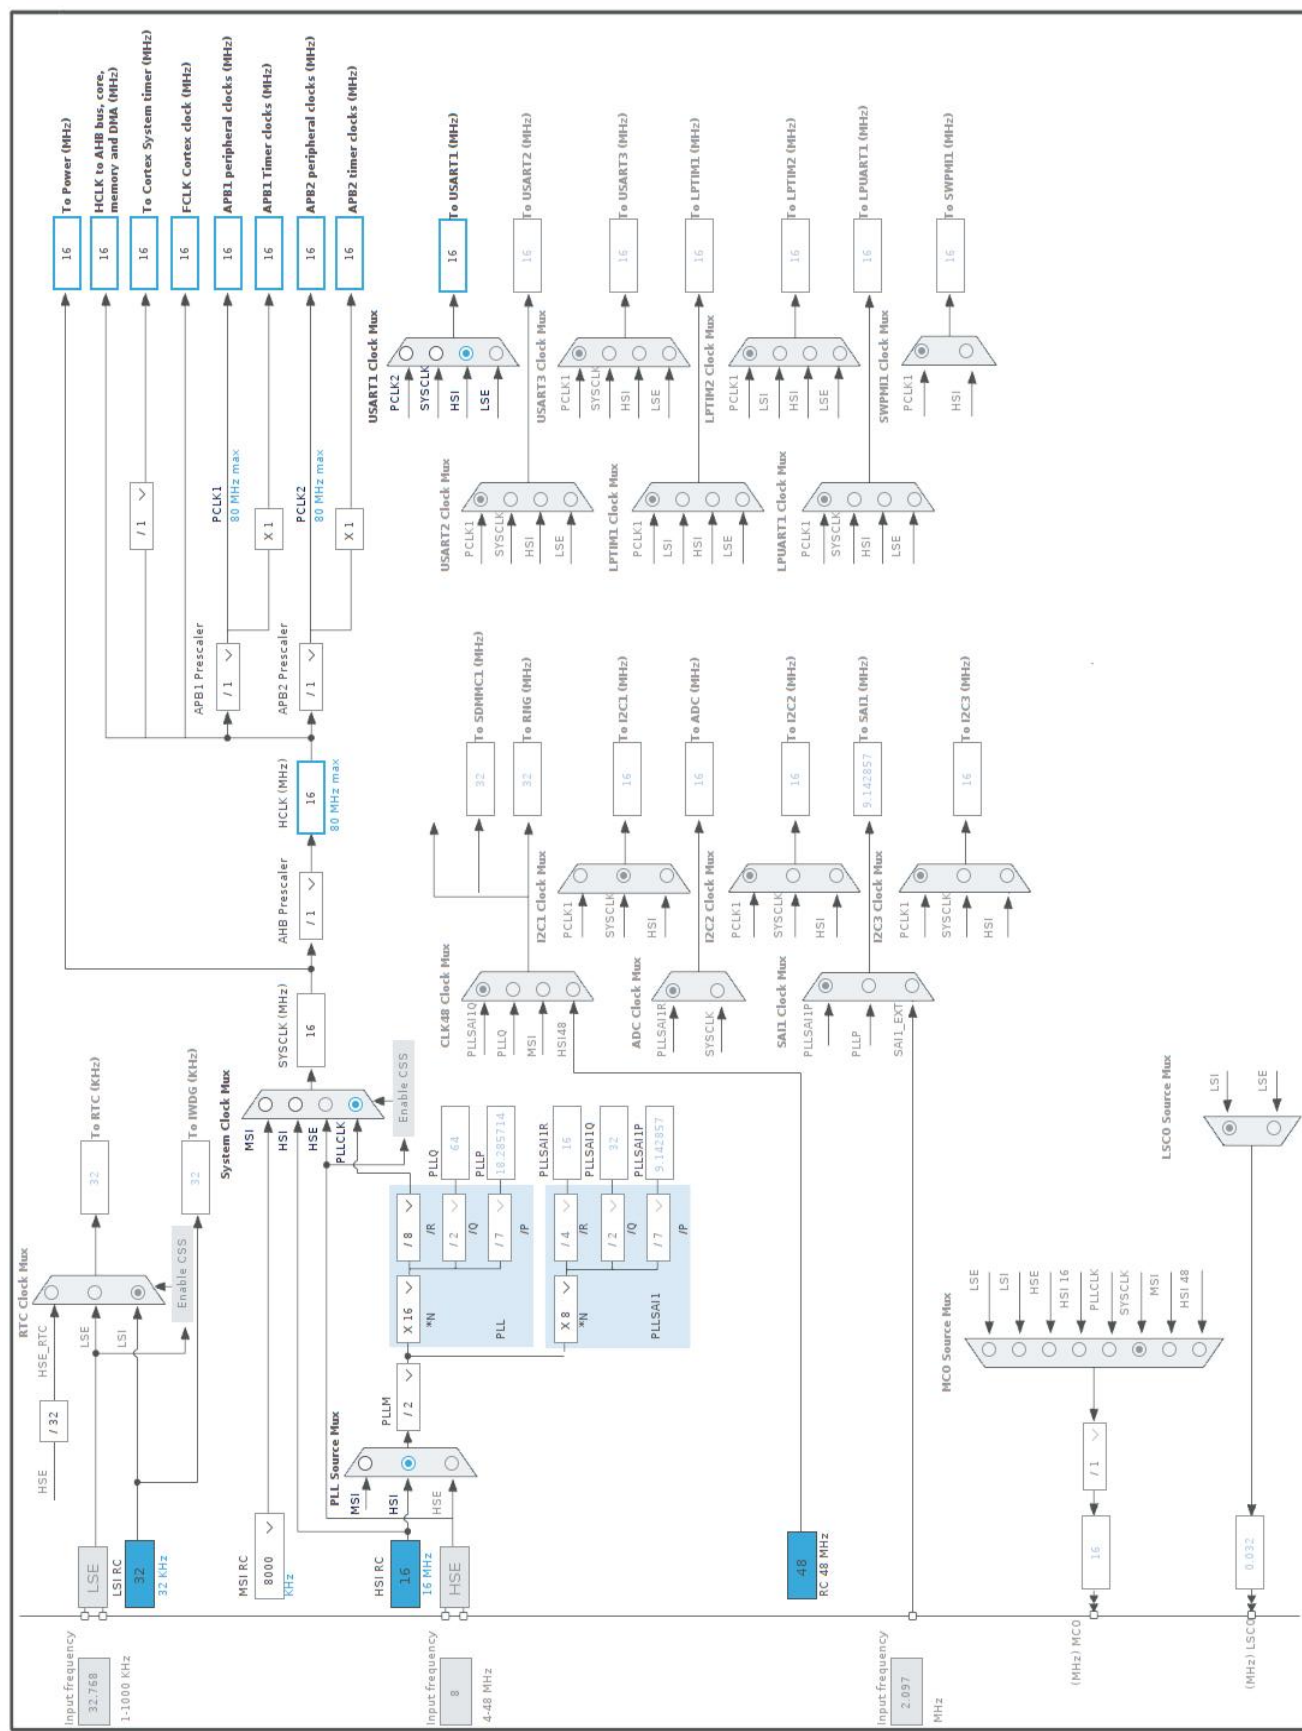

5. Software Project

5.1. Project Settings

Name	Value
Project Name	IdrfixedL431
Project Folder	/home/deh/GliderWinchItems/CANloader1/IdrfixedL431
Toolchain / IDE	Makefile
Firmware Package Name and Version	STM32Cube FW_L4 V1.17.0
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_CAN1_Init	CAN1
4	MX_USART1_UART_Init	USART1
5	MX_TIM15_Init	TIM15
6	MX_CRC_Init	CRC

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x1
MCU	STM32L431RBTx
Datasheet	DS11453_Rev1

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	FLASH	n/a
CPU Frequency	32 MHz	0 Hz
Clock Configuration	HSE BYP ART	ALL CLOCKS OFF
Clock Source Frequency	32 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	3.46 mA	1.06 μ A
Duration	0.1 ms	0.9 ms
DMIPS	40.0	0.0
Ta Max	104.53	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	346.95 μ A
Battery Life	1 year, 1 month, 8 days, 12 hours	Average DMIPS	40.0 DMIPS

6.6. Chart

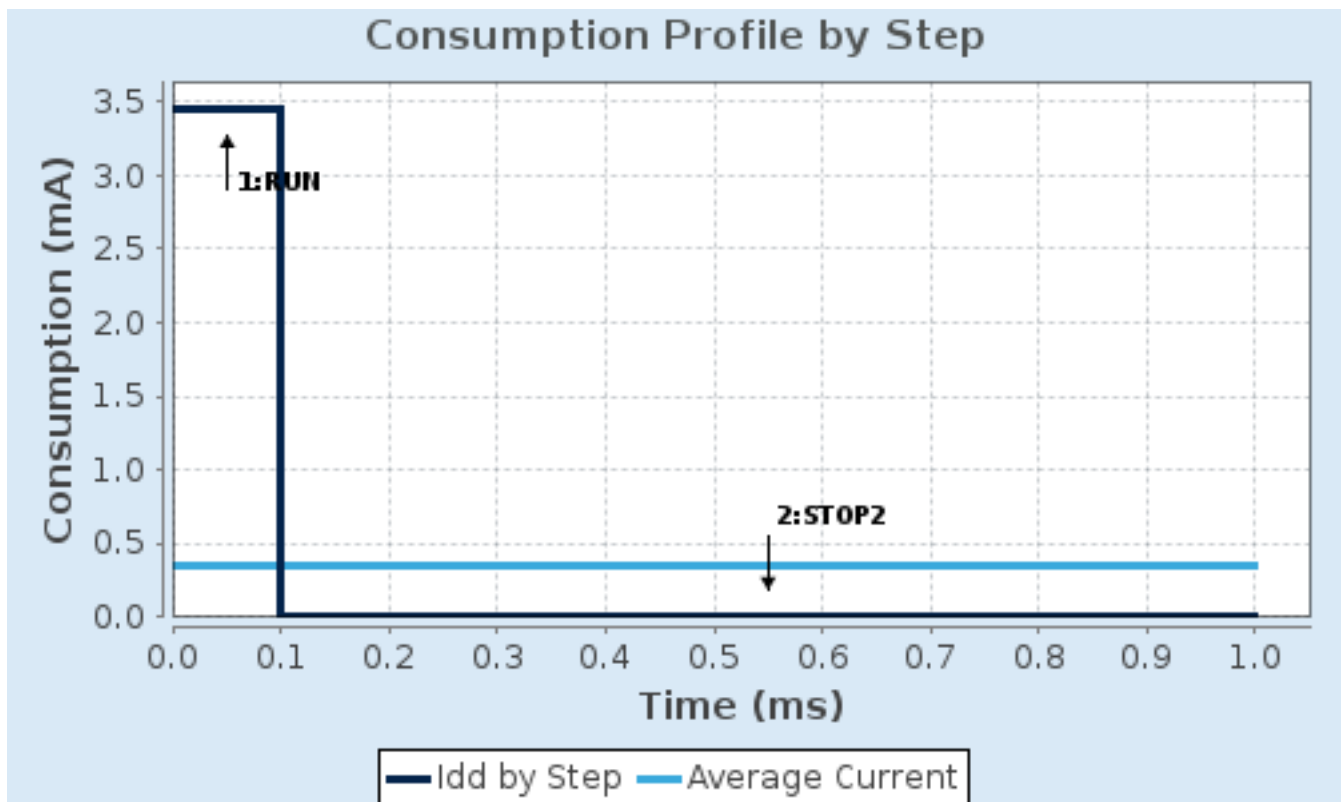

7. Peripherals and Middlewares Configuration

7.1. CAN1

mode: Activated

7.1.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	4 *
Time Quantum	250.0 *
Time Quanta in Bit Segment 1	5 Times *
Time Quanta in Bit Segment 2	2 Times *
Time for one Bit	2000.00 *
Baud Rate	500000 *
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Disable
Automatic Wake-Up Mode	Disable
Automatic Retransmission	Enable *
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

Advanced Parameters:

Operating Mode	Normal
----------------	--------

7.2. CRC

mode: Activated

7.2.1. Parameter Settings:

Basic Parameters:

Default Polynomial State	Enable
Default Init Value State	Enable

Advanced Parameters:

Input Data Inversion Mode	None
Output Data Inversion Mode	Disable
Input Data Format	Words *

7.3. RCC

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

7.4. SYS

Timebase Source: TIM16

7.5. TIM15

mode: Clock Source

Channel1: Output Compare No Output

7.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	16 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

Output Compare No Output Channel 1:

Mode	Frozen (used for Timing base)
Pulse (16 bits value)	0
Output compare preload	Disable
CH Polarity	High
CH Idle State	Reset

7.6. USART1

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
CAN1	PB8	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB9	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_GRN
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_RED

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
CAN1 TX interrupt	true	5	0
CAN1 RX0 interrupt	true	5	0
CAN1 RX1 interrupt	true	5	0
TIM1 update interrupt and TIM16 global interrupt	true	0	0
USART1 global interrupt	true	8	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
CAN1 SCE interrupt	unused		
TIM1 break interrupt and TIM15 global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
CAN1 TX interrupt	false	true	true
CAN1 RX0 interrupt	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
CAN1 RX1 interrupt	false	true	true
TIM1 update interrupt and TIM16 global interrupt	false	true	true
USART1 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA		TIM15 ✓	CAN1 ✓			CRC ✓
GPIO ✓			USART1 ✓			
NVIC ✓						
RCC ✓						
SYS ✓						

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00257211.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00151940.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00218224.pdf
Application note	http://www.st.com/resource/en/application_note/CD00160362.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00085385.pdf
Application note	http://www.st.com/resource/en/application_note/DM00087593.pdf
Application note	http://www.st.com/resource/en/application_note/DM00125306.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00141025.pdf
Application note	http://www.st.com/resource/en/application_note/DM00144612.pdf
Application note	http://www.st.com/resource/en/application_note/DM00148033.pdf
Application note	http://www.st.com/resource/en/application_note/DM00150423.pdf

Application note http://www.st.com/resource/en/application_note/DM00151811.pdf

Application note http://www.st.com/resource/en/application_note/DM00156964.pdf

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note http://www.st.com/resource/en/application_note/DM00209748.pdf

Application note http://www.st.com/resource/en/application_note/DM00209768.pdf

Application note http://www.st.com/resource/en/application_note/DM00209772.pdf

Application note http://www.st.com/resource/en/application_note/DM00216518.pdf

Application note http://www.st.com/resource/en/application_note/DM00220769.pdf

Application note http://www.st.com/resource/en/application_note/DM00226326.pdf

Application note http://www.st.com/resource/en/application_note/DM00227538.pdf

Application note http://www.st.com/resource/en/application_note/DM00236305.pdf

Application note http://www.st.com/resource/en/application_note/DM00257177.pdf

Application note http://www.st.com/resource/en/application_note/DM00260952.pdf

Application note http://www.st.com/resource/en/application_note/DM00263732.pdf

Application note http://www.st.com/resource/en/application_note/DM00269143.pdf

Application note http://www.st.com/resource/en/application_note/DM00269146.pdf

Application note http://www.st.com/resource/en/application_note/DM00272912.pdf

Application note http://www.st.com/resource/en/application_note/DM00311483.pdf

Application note http://www.st.com/resource/en/application_note/DM00315319.pdf

Application note http://www.st.com/resource/en/application_note/DM00327191.pdf

Application note http://www.st.com/resource/en/application_note/DM00354244.pdf

Application note http://www.st.com/resource/en/application_note/DM00354333.pdf

Application note http://www.st.com/resource/en/application_note/DM00355687.pdf

Application note http://www.st.com/resource/en/application_note/DM00367673.pdf

Application note http://www.st.com/resource/en/application_note/DM00380469.pdf

Application note http://www.st.com/resource/en/application_note/DM00395696.pdf

Application note http://www.st.com/resource/en/application_note/DM00445657.pdf

Application note http://www.st.com/resource/en/application_note/DM00476869.pdf

Application note http://www.st.com/resource/en/application_note/DM00493651.pdf

Application note http://www.st.com/resource/en/application_note/DM00536349.pdf

Application note http://www.st.com/resource/en/application_note/DM00660597.pdf

Application note http://www.st.com/resource/en/application_note/DM00725181.pdf