



## 1. Description

### 1.1. Project

Project Name	drum
Board Name	custom
Generated with:	STM32CubeMX 6.0.1
Date	10/17/2020


### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

### 1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

## 2. Pinout Configuration

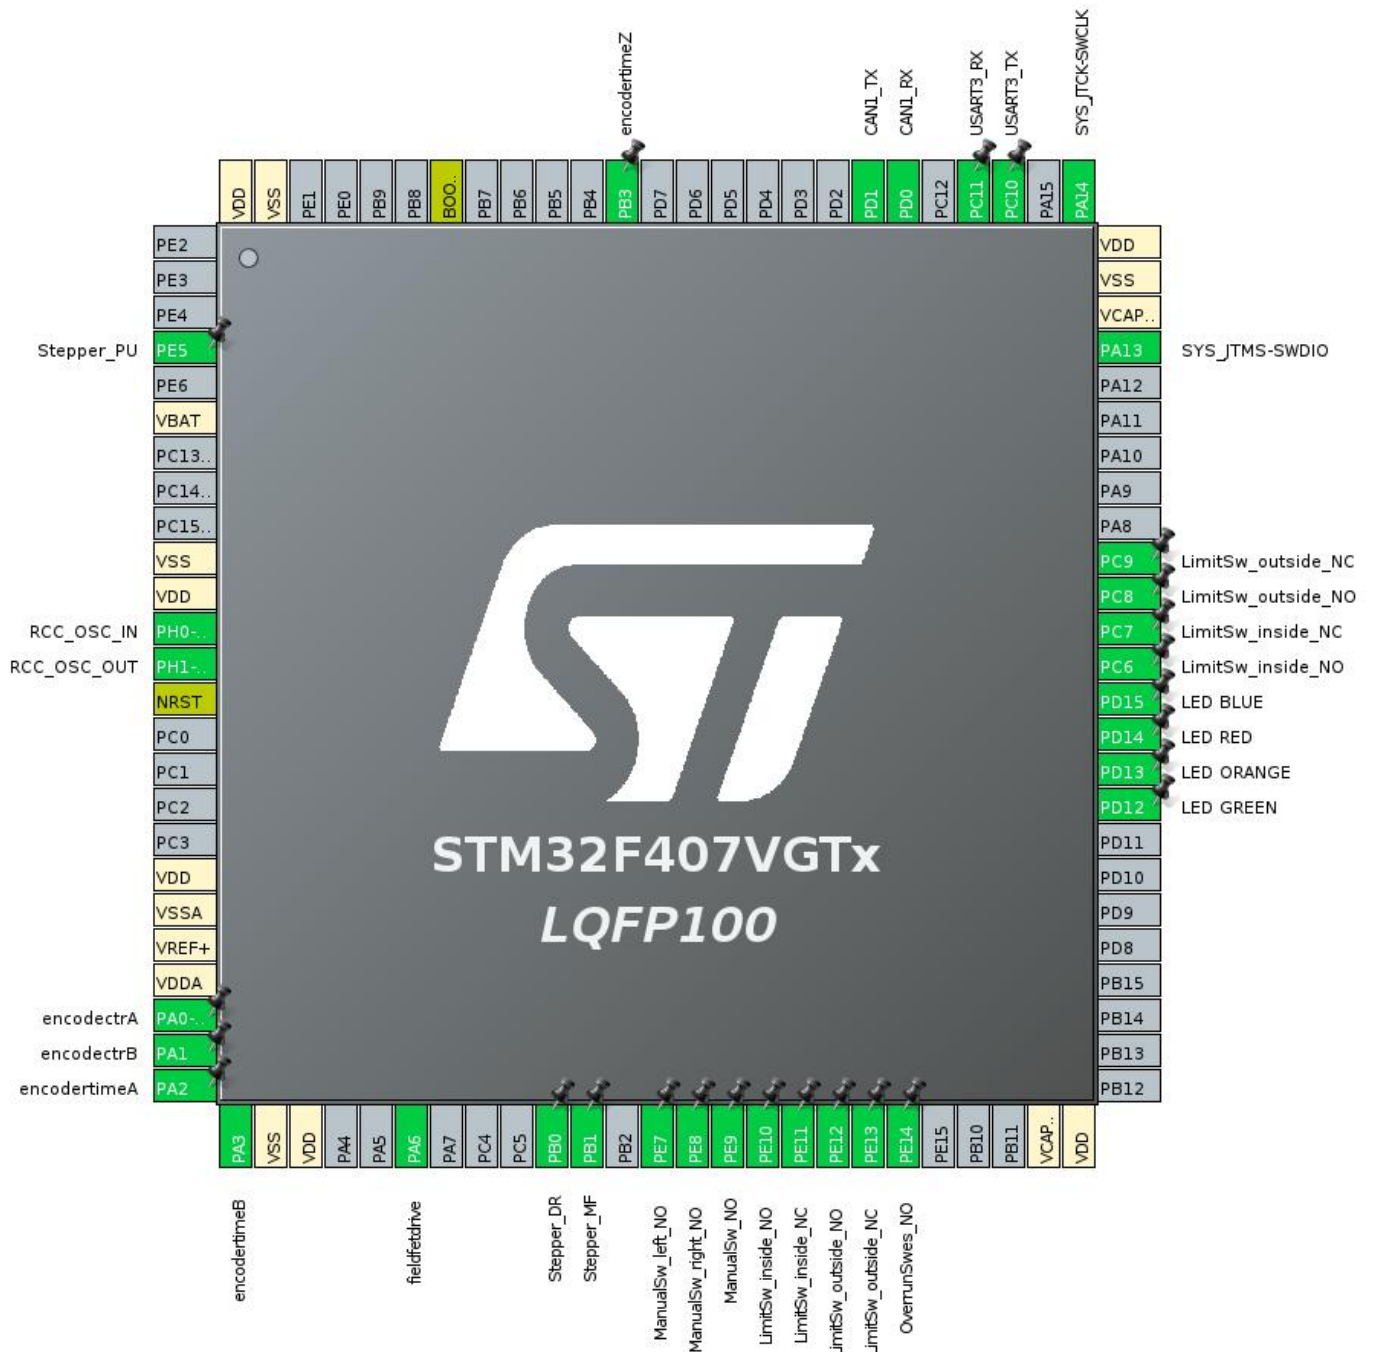


### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
4	PE5	I/O	TIM9_CH1	Stepper_PU
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	TIM5_CH1	encodectrA
24	PA1	I/O	TIM5_CH2	encodectrB
25	PA2	I/O	TIM2_CH3	encodertimeA
26	PA3	I/O	TIM2_CH4	encodertimeB
27	VSS	Power		
28	VDD	Power		
31	PA6	I/O	TIM13_CH1	fieldfetdrive
35	PB0 *	I/O	GPIO_Output	Stepper_DR
36	PB1 *	I/O	GPIO_Output	Stepper_MF
38	PE7	I/O	GPIO_EXTI7	ManualSw_left_NO
39	PE8	I/O	GPIO_EXTI8	ManualSw_right_NO
40	PE9 *	I/O	GPIO_Input	ManualSw_NO
41	PE10	I/O	GPIO_EXTI10	LimitSw_inside_NO
42	PE11	I/O	GPIO_EXTI11	LimitSw_inside_NC
43	PE12	I/O	GPIO_EXTI12	LimitSw_outside_NO
44	PE13	I/O	GPIO_EXTI13	LimitSw_outside_NC
45	PE14	I/O	GPIO_EXTI14	OverrunSwes_NO
49	VCAP_1	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	LED GREEN
60	PD13 *	I/O	GPIO_Output	LED ORANGE
61	PD14 *	I/O	GPIO_Output	LED RED
62	PD15 *	I/O	GPIO_Output	LED BLUE
63	PC6	I/O	TIM3_CH1	LimitSw_inside_NO
64	PC7	I/O	TIM3_CH2	LimitSw_inside_NC

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
65	PC8	I/O	TIM3_CH3	LimitSw_outside_NO
66	PC9	I/O	TIM3_CH4	LimitSw_outside_NC
72	PA13	I/O	SYS_JTMS-SWDIO	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	
78	PC10	I/O	USART3_TX	
79	PC11	I/O	USART3_RX	
81	PD0	I/O	CAN1_RX	
82	PD1	I/O	CAN1_TX	
89	PB3	I/O	TIM2_CH2	encodertimeZ
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

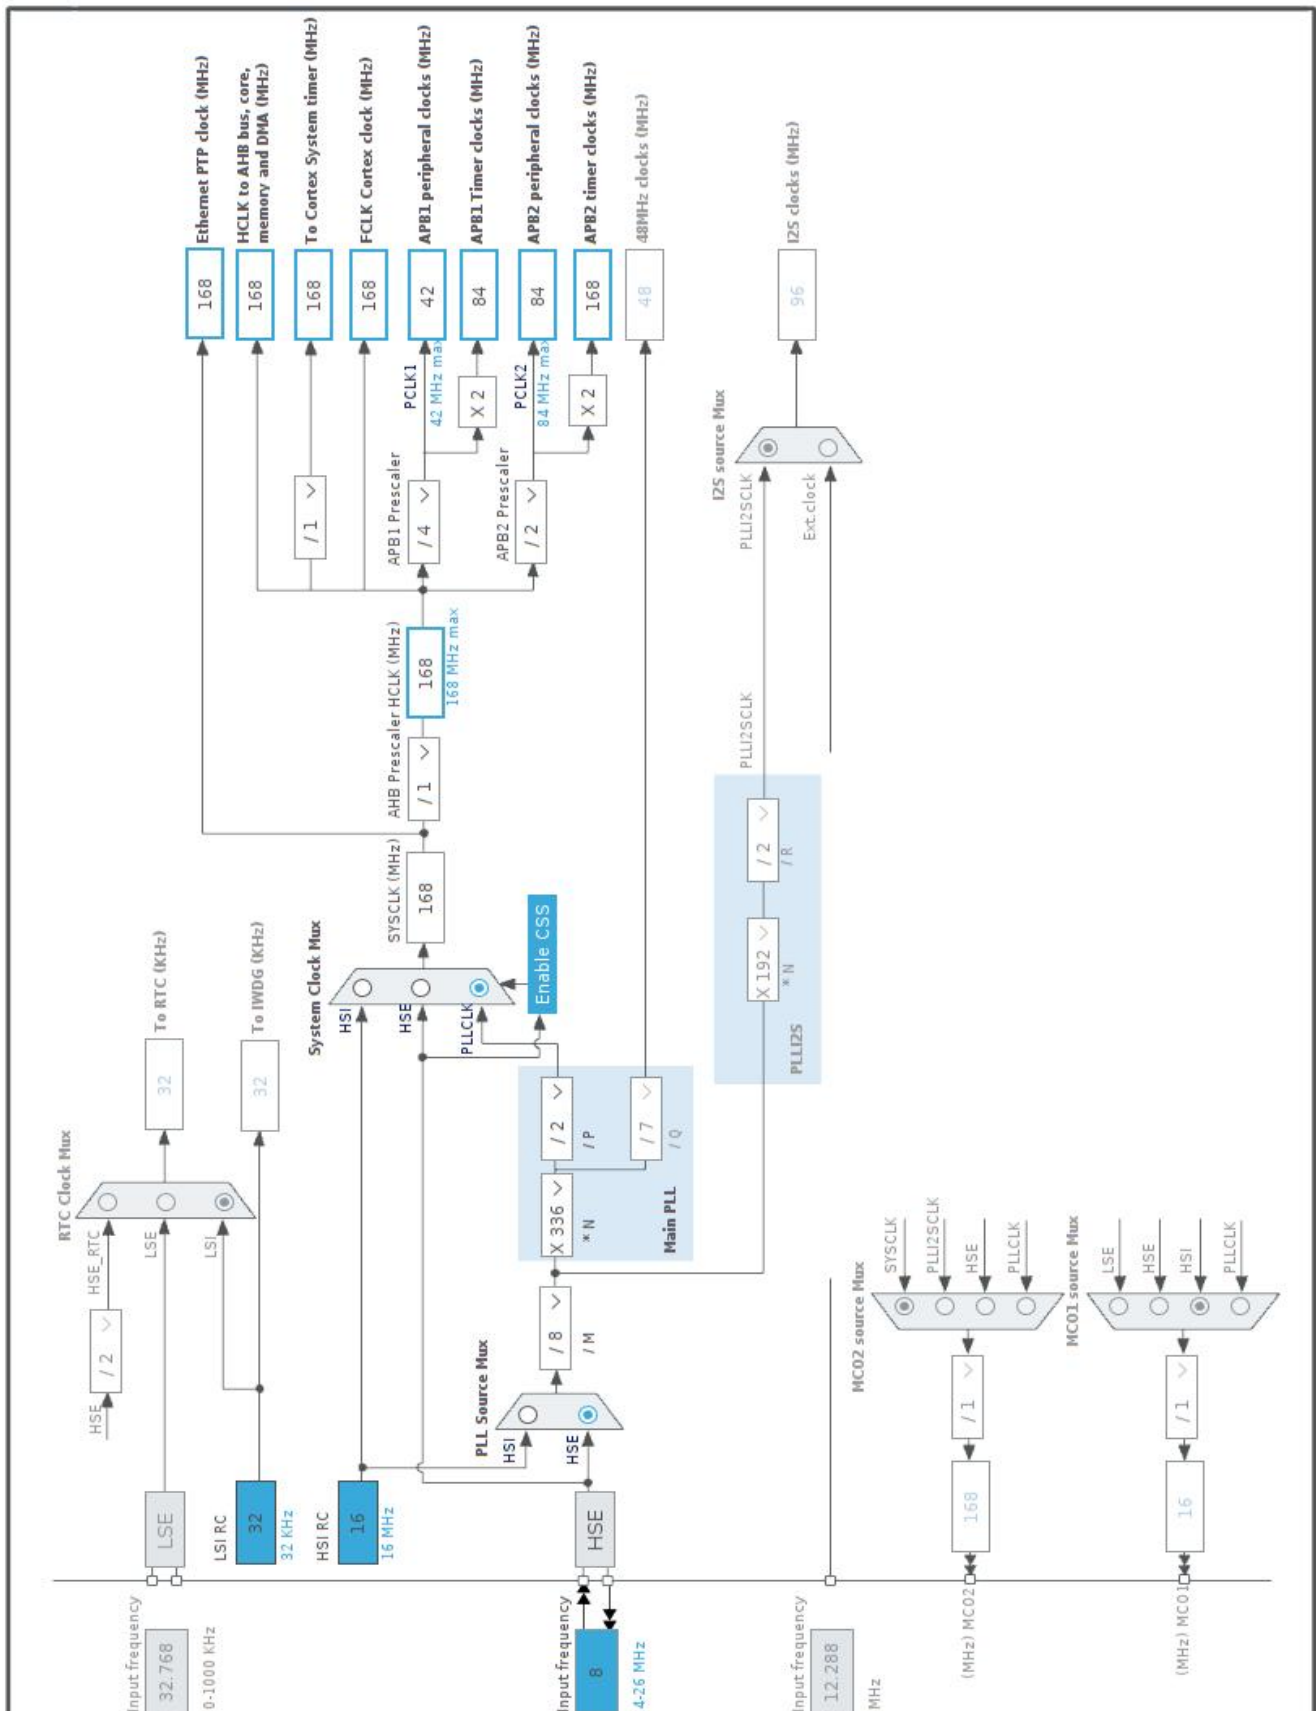

## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	drum
Project Folder	/home/gsm/GliderWinchItems/drum
Toolchain / IDE	Makefile
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.0
Application Structure	Basic
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

### 5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	IP Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_CAN1_Init	CAN1
5	MX_USART3_UART_Init	USART3
6	MX_TIM2_Init	TIM2
7	MX_TIM5_Init	TIM5
8	MX_TIM9_Init	TIM9
9	MX_TIM13_Init	TIM13
10	MX_TIM3_Init	TIM3





## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	DS8626_Rev8

### 6.2. Parameter Selection

Temperature	25
Vdd	3.3

### 6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


#### 6.4. Sequence

<b>Step</b>	Step1	Step2
<b>Mode</b>	RUN	STOP
<b>Vdd</b>	3.3	3.3
<b>Voltage Source</b>	Battery	Battery
<b>Range</b>	Scale1-High	No Scale
<b>Fetch Type</b>	FLASH	n/a
<b>CPU Frequency</b>	168 MHz	0 Hz
<b>Clock Configuration</b>	HSE PLL	Regulator LP Flash-PwrDwn
<b>Clock Source Frequency</b>	4 MHz	0 Hz
<b>Peripherals</b>		
<b>Additional Cons.</b>	0 mA	0 mA
<b>Average Current</b>	46 mA	280 $\mu$ A
<b>Duration</b>	0.1 ms	0.9 ms
<b>DMIPS</b>	210.0	0.0
<b>Ta Max</b>	98.47	104.96
<b>Category</b>	In DS Table	In DS Table

#### 6.5. Results

Sequence Time	1 ms	Average Current	4.85 mA
Battery Life	29 days, 4 hours	Average DMIPS	210.0 DMIPS

#### 6.6. Chart

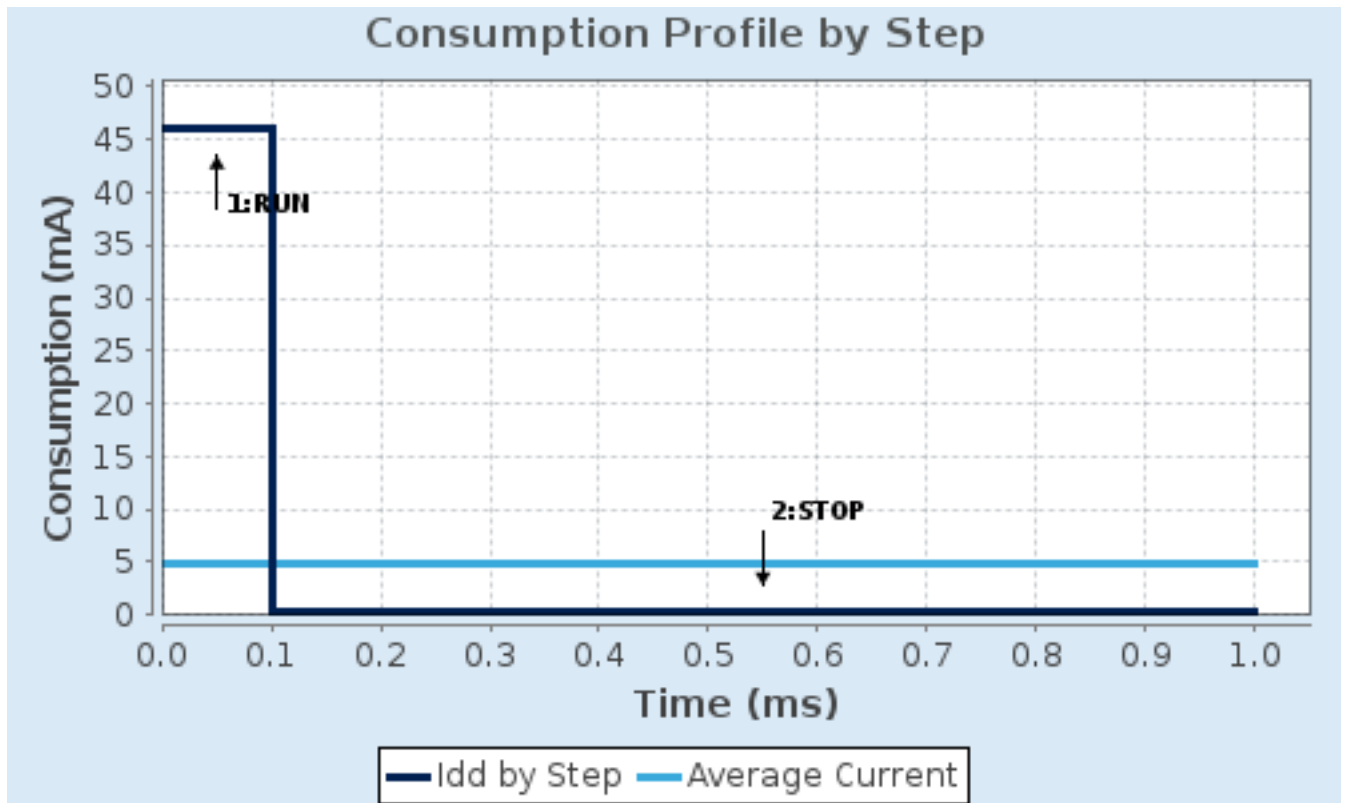

## 7. IPs and Middleware Configuration

### 7.1. CAN1

**mode: Mode**

#### 7.1.1. Parameter Settings:

##### **Bit Timings Parameters:**

Prescaler (for Time Quantum)	12 *
Time Quantum	285.7142857142857 *
Time Quanta in Bit Segment 1	5 Times *
Time Quanta in Bit Segment 2	1 Time
ReSynchronization Jump Width	1 Time

##### **Basic Parameters:**

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Disable
Automatic Wake-Up Mode	Disable
Automatic Retransmission	Disable
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

##### **Advanced Parameters:**

Operating Mode	Normal
----------------	--------

### 7.2. GPIO

### 7.3. RCC

**High Speed Clock (HSE): Crystal/Ceramic Resonator**

#### 7.3.1. Parameter Settings:

##### **System Parameters:**

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

##### **RCC Parameters:**

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

## Power Parameters:

Power Regulator Voltage Scale

Power Regulator Voltage Scale 1

## 7.4. SYS

**Debug: Serial Wire**

**Timebase Source: TIM12**

## 7.5. TIM2

**Channel1: Output Compare No Output**

**Channel2: Input Capture direct mode**

**Channel3: Input Capture direct mode**

**Channel4: Input Capture direct mode**

### 7.5.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value )	4294967295
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

#### Output Compare No Output Channel 1:

Mode	Frozen (used for Timing base)
Pulse (32 bits value)	0
Output compare preload	Disable
CH Polarity	High

#### Input Capture Channel 2:

Polarity Selection	<b>Both Edges *</b>
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

#### Input Capture Channel 3:

Polarity Selection	<b>Both Edges *</b>
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

#### Input Capture Channel 4:

Polarity Selection	<b>Both Edges *</b>
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

## 7.6. TIM3

**Clock Source : Internal Clock**

**Channel1: Input Capture direct mode**

**Channel2: Input Capture direct mode**

**Channel3: Input Capture direct mode**

**Channel4: Input Capture direct mode**

### 7.6.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

#### Input Capture Channel 1:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

#### Input Capture Channel 2:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

#### Input Capture Channel 3:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

#### Input Capture Channel 4:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

## 7.7. TIM5

### Combined Channels: Encoder Mode

#### 7.7.1. Parameter Settings:

##### Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value )	4294967295
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

##### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

##### Encoder:

Encoder Mode	Encoder Mode T11
--------------	------------------

\_\_\_\_ Parameters for Channel 1 \_\_\_\_

Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

\_\_\_\_ Parameters for Channel 2 \_\_\_\_

Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

## 7.8. TIM9

**mode: Clock Source**

**Channel1: PWM Generation CH1**

**mode: One Pulse Mode**

### 7.8.1. Parameter Settings:

#### **Counter Settings:**

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>1680 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### **PWM Generation Channel 1:**

Mode	PWM mode 1
Pulse (16 bits value)	<b>504 *</b>
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

## **7.9. TIM13**

**mode: Activated**

**Channel1: PWM Generation CH1**

### 7.9.1. Parameter Settings:

#### **Counter Settings:**

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>21000 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

#### **PWM Generation Channel 1:**

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

## **7.10. USART3**

**Mode: Asynchronous**

### 7.10.1. Parameter Settings:



#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## 7.11. FREERTOS

### Interface: CMSIS\_V1

#### 7.11.1. Config parameters:

##### API:

FreeRTOS API	CMSIS v1
--------------	----------

##### Versions:

FreeRTOS version	10.2.1
CMSIS-RTOS version	1.02

##### MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

##### Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	<b>512 *</b>
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	<b>96 *</b>
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	<b>12 *</b>
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Enabled
USE_TICKLESS_IDLE	Disabled

USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

#### Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	<b>32768 *</b>
Memory Management scheme	heap_4

#### Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	<b>Option2 *</b>

#### Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

#### Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

#### Software timer definitions:

USE_TIMERS	<b>Enabled *</b>
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	192

#### Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

#### Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE	size_t
USE_POSIX_ERRNO	Disabled

### 7.11.2. Include parameters:

#### Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	<b>Disabled *</b>
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	<b>Enabled *</b>

vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	<b>Enabled *</b>
xTaskGetCurrentTaskHandle	<b>Enabled *</b>
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

### 7.11.3. Advanced settings:

#### **Newlib settings (see parameter description first):**

USE\_NEWLIB\_REENTRANT                      Disabled

#### **Project settings (see parameter description first):**

Use FW pack heap file                      Enabled

**\* User modified value**

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
CAN1	PD0	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	
	PD1	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM2	PA2	TIM2_CH3	<b>Alternate Function Open Drain *</b>	<b>Pull-up *</b>	Low	encodertimeA
	PA3	TIM2_CH4	<b>Alternate Function Open Drain *</b>	<b>Pull-up *</b>	Low	encodertimeB
	PB3	TIM2_CH2	<b>Alternate Function Open Drain *</b>	<b>Pull-up *</b>	Low	encodertimeZ
TIM3	PC6	TIM3_CH1	Alternate Function Push Pull	<b>Pull-up *</b>	Low	LimitSw_inside_NO
	PC7	TIM3_CH2	Alternate Function Push Pull	<b>Pull-up *</b>	Low	LimitSw_inside_NC
	PC8	TIM3_CH3	Alternate Function Push Pull	<b>Pull-up *</b>	Low	LimitSw_outside_NO
	PC9	TIM3_CH4	Alternate Function Push Pull	<b>Pull-up *</b>	Low	LimitSw_outside_NC
TIM5	PA0-WKUP	TIM5_CH1	Alternate Function Push Pull	<b>Pull-up *</b>	Low	encodectrA
	PA1	TIM5_CH2	Alternate Function Push Pull	<b>Pull-up *</b>	Low	encodectrB
TIM9	PE5	TIM9_CH1	Alternate Function Push Pull	<b>Pull-up *</b>	<b>Very High</b> *	Stepper_PU
TIM13	PA6	TIM13_CH1	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	fieldfetdrive
USART3	PC10	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	
	PC11	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	
GPIO	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	<b>Medium</b> *	Stepper_DR
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Stepper_MF

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PE7	GPIO_EXTI7	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	ManualSw_left_NO
	PE8	GPIO_EXTI8	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	ManualSw_right_NO
	PE9	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	ManualSw_NO
	PE10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	LimitSw_inside_NO
	PE11	GPIO_EXTI11	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	LimitSw_inside_NC
	PE12	GPIO_EXTI12	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	LimitSw_outside_NO
	PE13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	LimitSw_outside_NC
	PE14	GPIO_EXTI14	External Interrupt Mode with Rising edge trigger detection	<b>Pull-up *</b>	n/a	OverrunSwes_NO
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED GREEN
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED ORANGE
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED RED
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED BLUE

## 8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART3_RX	DMA1_Stream1	Peripheral To Memory	Low
USART3_TX	DMA1_Stream3	Memory To Peripheral	Low

### USART3\_RX: DMA1\_Stream1 DMA request Settings:

Mode: Normal  
 Use fifo: Disable  
 Peripheral Increment: Disable  
 Memory Increment: **Enable \***  
 Peripheral Data Width: Byte  
 Memory Data Width: Byte

### USART3\_TX: DMA1\_Stream3 DMA request Settings:

Mode: Normal  
 Use fifo: Disable  
 Peripheral Increment: Disable  
 Memory Increment: **Enable \***  
 Peripheral Data Width: Byte  
 Memory Data Width: Byte

### 8.3. NVIC configuration

#### 8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 stream1 global interrupt	true	10	0
DMA1 stream3 global interrupt	true	10	0
CAN1 TX interrupts	true	7	0
CAN1 RX0 interrupts	true	7	0
CAN1 RX1 interrupt	true	7	0
TIM1 break interrupt and TIM9 global interrupt	true	6	0
TIM2 global interrupt	true	2	0
USART3 global interrupt	true	8	0
EXTI line[15:10] interrupts	true	5	0
TIM8 break interrupt and TIM12 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
CAN1 SCE interrupt	unused		
EXTI line[9:5] interrupts	unused		
TIM3 global interrupt	unused		
TIM8 update interrupt and TIM13 global interrupt	unused		
TIM5 global interrupt	unused		
FPU global interrupt	unused		

#### 8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	true	true	false
Hard fault interrupt	true	true	false
Memory management fault	true	true	false
Pre-fetch fault, memory access fault	true	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Undefined instruction or illegal state	true	true	false
System service call via SWI instruction	true	false	false
Debug monitor	true	true	false
Pendable request for system service	true	false	false
System tick timer	true	false	false
DMA1 stream1 global interrupt	true	true	true
DMA1 stream3 global interrupt	true	true	true
CAN1 TX interrupts	true	true	true
CAN1 RX0 interrupts	true	true	true
CAN1 RX1 interrupt	true	true	true
TIM1 break interrupt and TIM9 global interrupt	true	true	true
TIM2 global interrupt	true	true	true
USART3 global interrupt	true	true	true
EXTI line[15:10] interrupts	true	true	true
TIM8 break interrupt and TIM12 global interrupt	true	true	true

\* User modified value



## 9. System Views

### 9.1. Category view

#### 9.1.1. Current

Middleware						
FREERTOS						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA		TIM2	CAN1			
GPIO		TIM3	USART3			
NVIC		TIM5				
RCC		TIM9				
SYS		TIM13				

## 10. Software Pack Report

### 10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	FreeRTOS	0.0.1	Class : CMSIS Group : RTOS SubGroup : FreeRTOS Version : 10.2.0 Class : RTOS Group : Core Version : 10.2.0

## 11. Docs & Resources

Type	Link
Datasheet	<a href="http://www.st.com/resource/en/datasheet/DM00037051.pdf">http://www.st.com/resource/en/datasheet/DM00037051.pdf</a>
Reference manual	<a href="http://www.st.com/resource/en/reference_manual/DM00031020.pdf">http://www.st.com/resource/en/reference_manual/DM00031020.pdf</a>
Programming manual	<a href="http://www.st.com/resource/en/programming_manual/DM00046982.pdf">http://www.st.com/resource/en/programming_manual/DM00046982.pdf</a>
Errata sheet	<a href="http://www.st.com/resource/en/errata_sheet/DM00037591.pdf">http://www.st.com/resource/en/errata_sheet/DM00037591.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00167594.pdf">http://www.st.com/resource/en/application_note/CD00167594.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00211314.pdf">http://www.st.com/resource/en/application_note/CD00211314.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00249778.pdf">http://www.st.com/resource/en/application_note/CD00249778.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00259245.pdf">http://www.st.com/resource/en/application_note/CD00259245.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264321.pdf">http://www.st.com/resource/en/application_note/CD00264321.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264342.pdf">http://www.st.com/resource/en/application_note/CD00264342.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264379.pdf">http://www.st.com/resource/en/application_note/CD00264379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00024853.pdf">http://www.st.com/resource/en/application_note/DM00024853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00025071.pdf">http://www.st.com/resource/en/application_note/DM00025071.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040802.pdf">http://www.st.com/resource/en/application_note/DM00040802.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040808.pdf">http://www.st.com/resource/en/application_note/DM00040808.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00042534.pdf">http://www.st.com/resource/en/application_note/DM00042534.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00046011.pdf">http://www.st.com/resource/en/application_note/DM00046011.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00050879.pdf">http://www.st.com/resource/en/application_note/DM00050879.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00072315.pdf">http://www.st.com/resource/en/application_note/DM00072315.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073742.pdf">http://www.st.com/resource/en/application_note/DM00073742.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073853.pdf">http://www.st.com/resource/en/application_note/DM00073853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00080497.pdf">http://www.st.com/resource/en/application_note/DM00080497.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00081379.pdf">http://www.st.com/resource/en/application_note/DM00081379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00115714.pdf">http://www.st.com/resource/en/application_note/DM00115714.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00123028.pdf">http://www.st.com/resource/en/application_note/DM00123028.pdf</a>

Application note [http://www.st.com/resource/en/application\\_note/DM00129215.pdf](http://www.st.com/resource/en/application_note/DM00129215.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00154959.pdf](http://www.st.com/resource/en/application_note/DM00154959.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00160482.pdf](http://www.st.com/resource/en/application_note/DM00160482.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00213525.pdf](http://www.st.com/resource/en/application_note/DM00213525.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00220769.pdf](http://www.st.com/resource/en/application_note/DM00220769.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00257177.pdf](http://www.st.com/resource/en/application_note/DM00257177.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00272912.pdf](http://www.st.com/resource/en/application_note/DM00272912.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00226326.pdf](http://www.st.com/resource/en/application_note/DM00226326.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00236305.pdf](http://www.st.com/resource/en/application_note/DM00236305.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00263732.pdf](http://www.st.com/resource/en/application_note/DM00263732.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00281138.pdf](http://www.st.com/resource/en/application_note/DM00281138.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00296349.pdf](http://www.st.com/resource/en/application_note/DM00296349.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00327191.pdf](http://www.st.com/resource/en/application_note/DM00327191.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00354244.pdf](http://www.st.com/resource/en/application_note/DM00354244.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00373474.pdf](http://www.st.com/resource/en/application_note/DM00373474.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00315319.pdf](http://www.st.com/resource/en/application_note/DM00315319.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00380469.pdf](http://www.st.com/resource/en/application_note/DM00380469.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00395696.pdf](http://www.st.com/resource/en/application_note/DM00395696.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00431633.pdf](http://www.st.com/resource/en/application_note/DM00431633.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00493651.pdf](http://www.st.com/resource/en/application_note/DM00493651.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00536349.pdf](http://www.st.com/resource/en/application_note/DM00536349.pdf)