




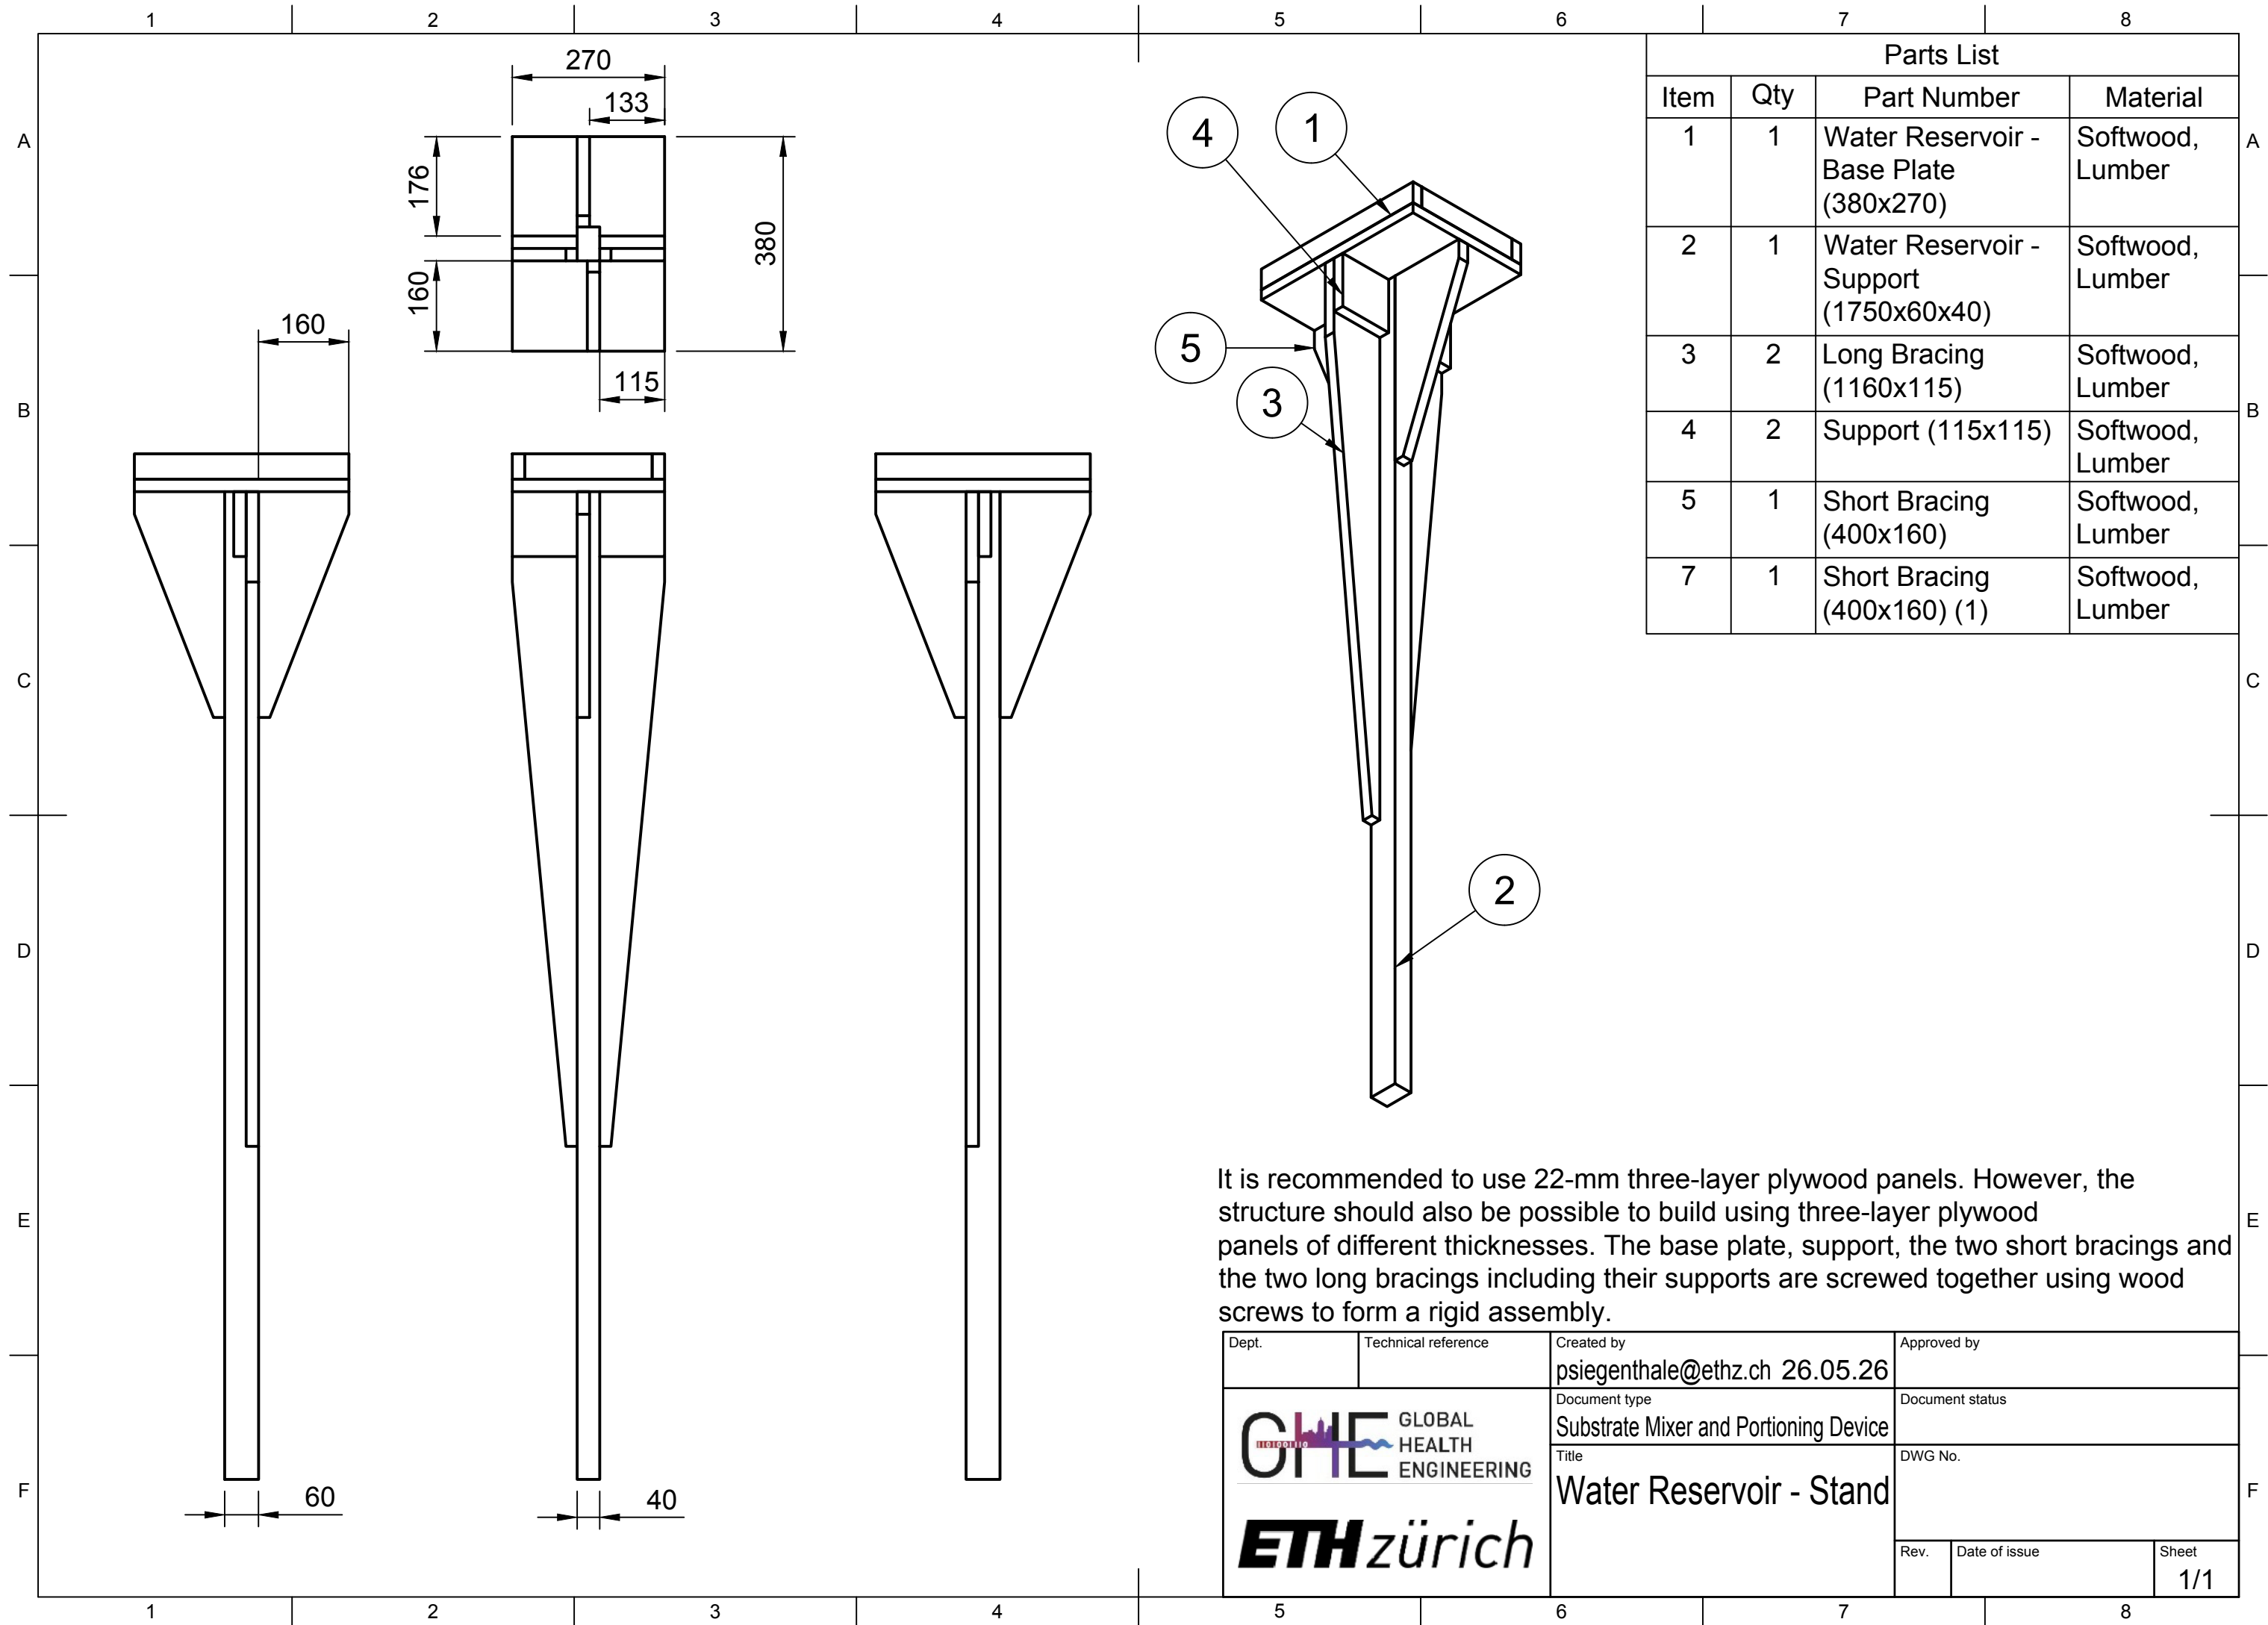


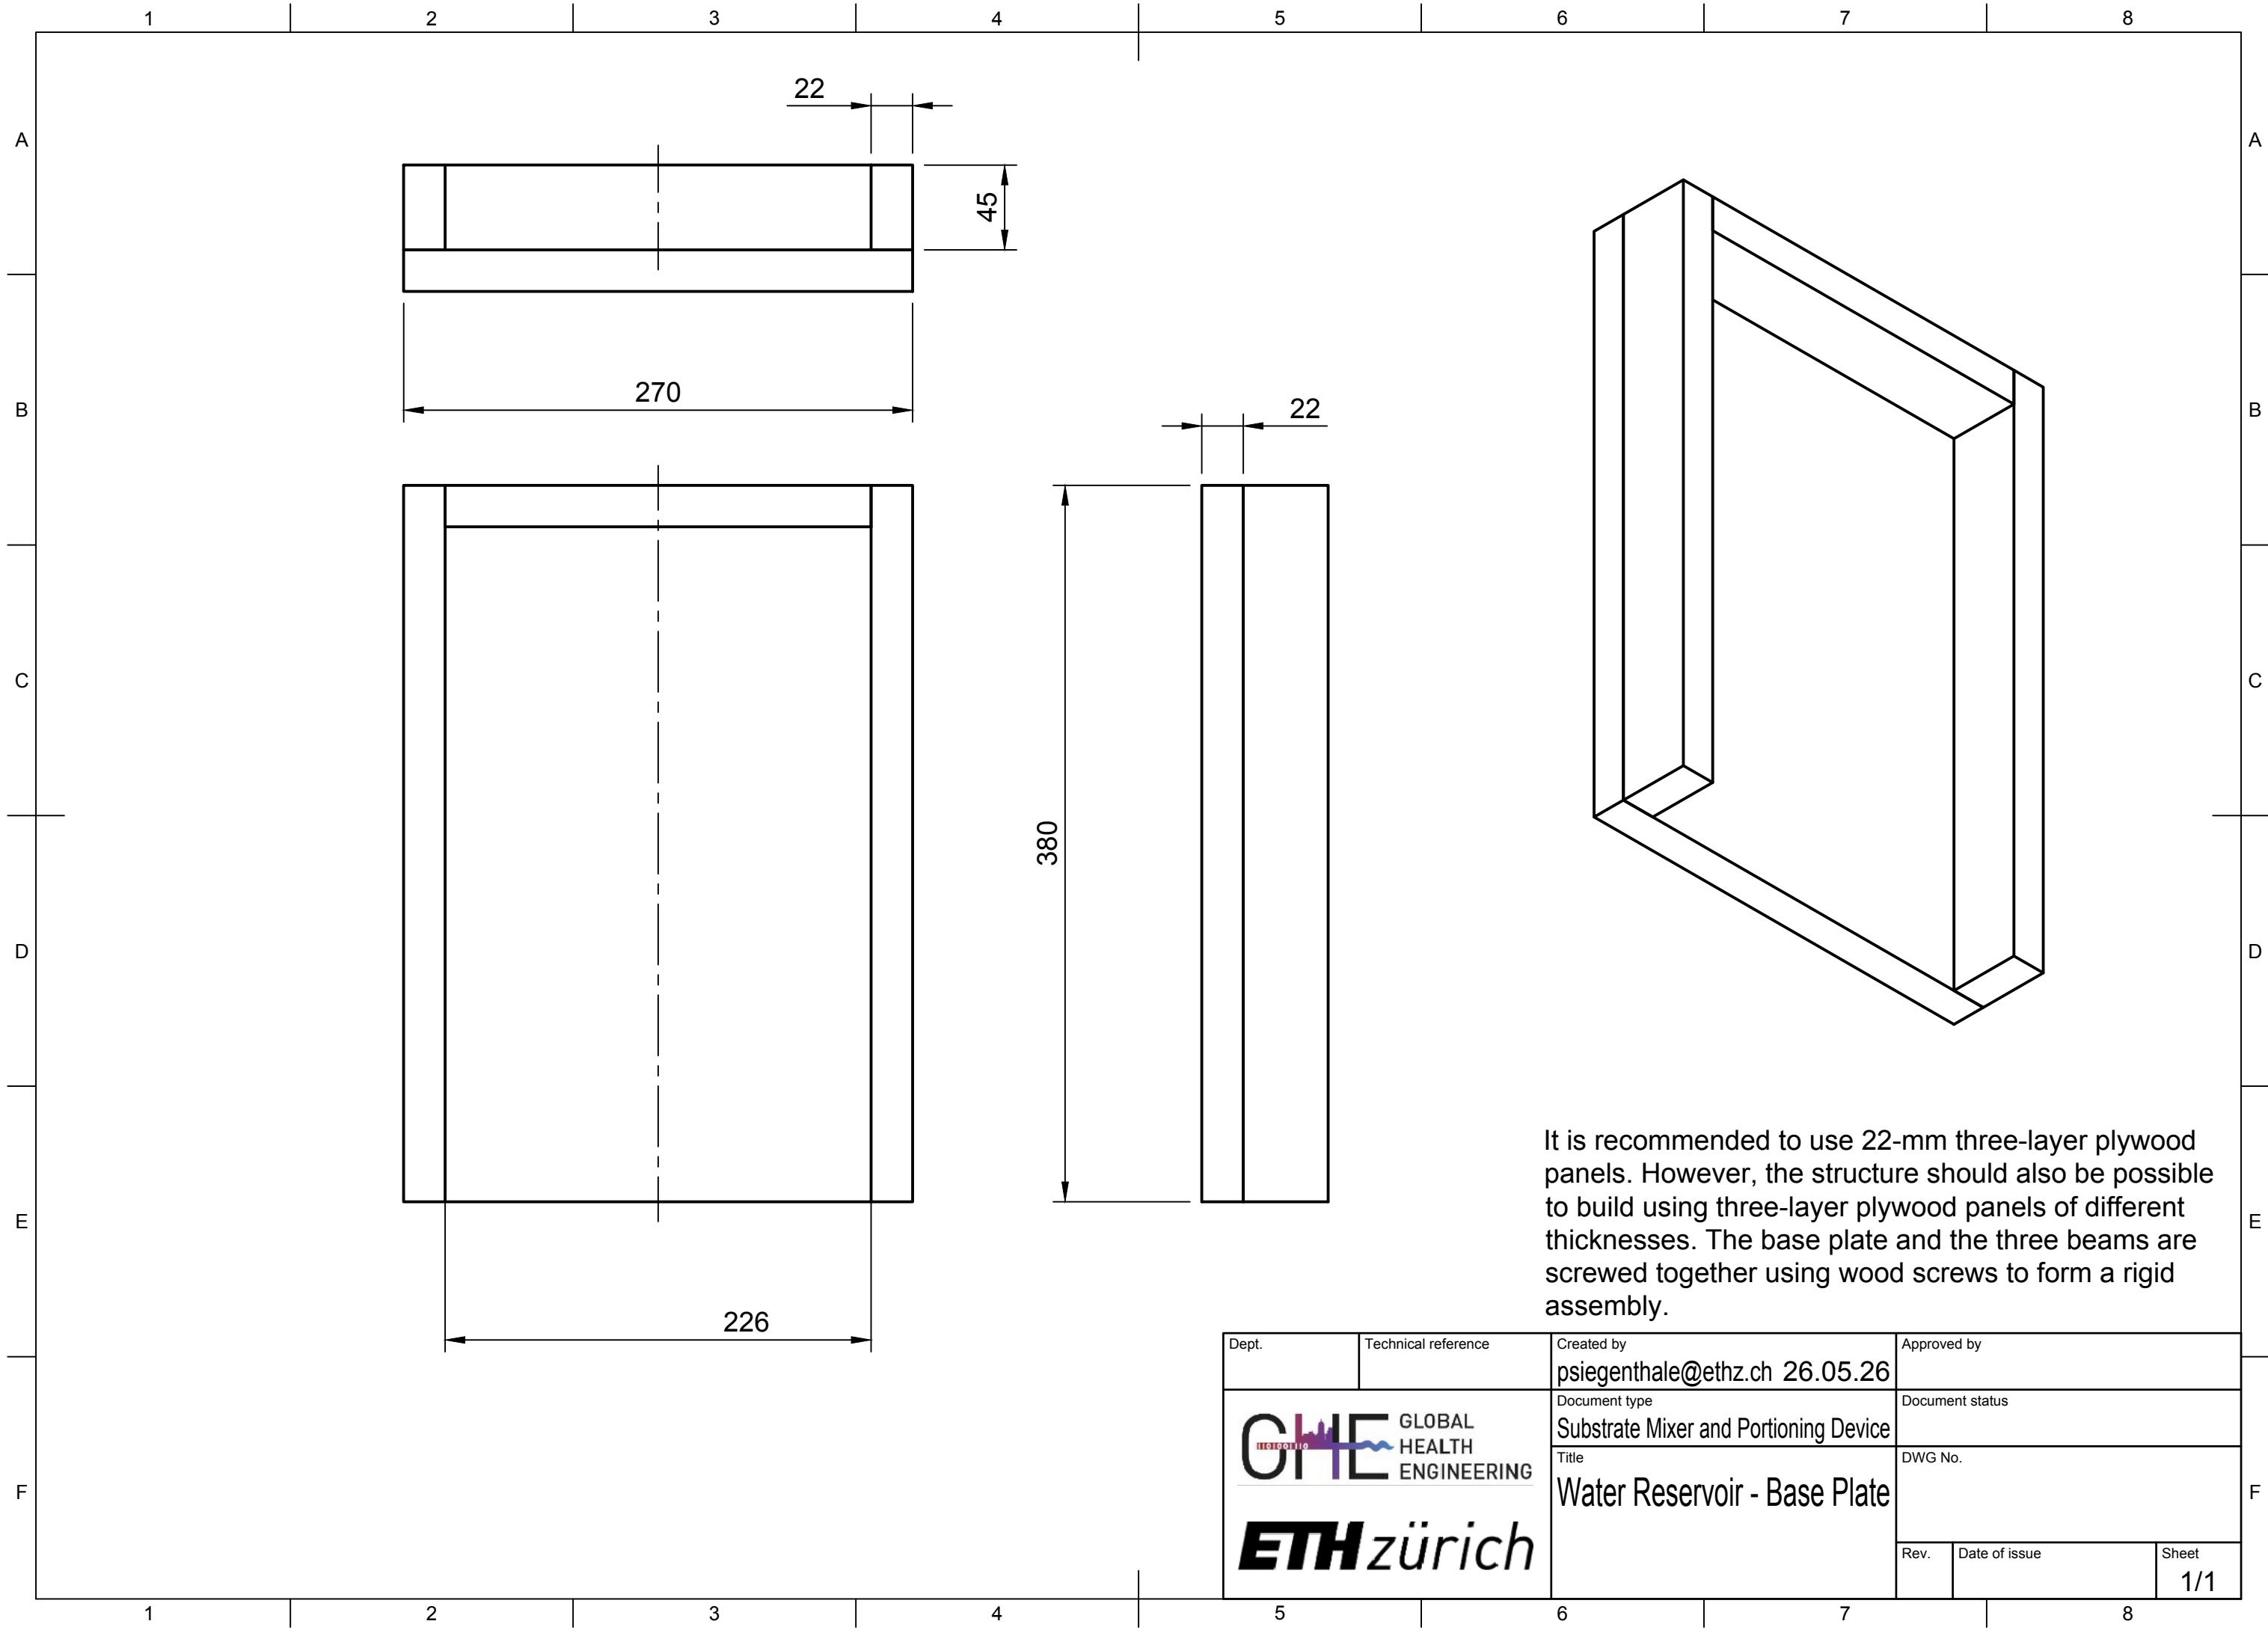


It is recommended to use 22-mm three-layer plywood panels. However, the structure should also be possible to build using three-layer plywood panels of different thicknesses. The base plate and the three beams are screwed together using wood screws to form a rigid assembly.

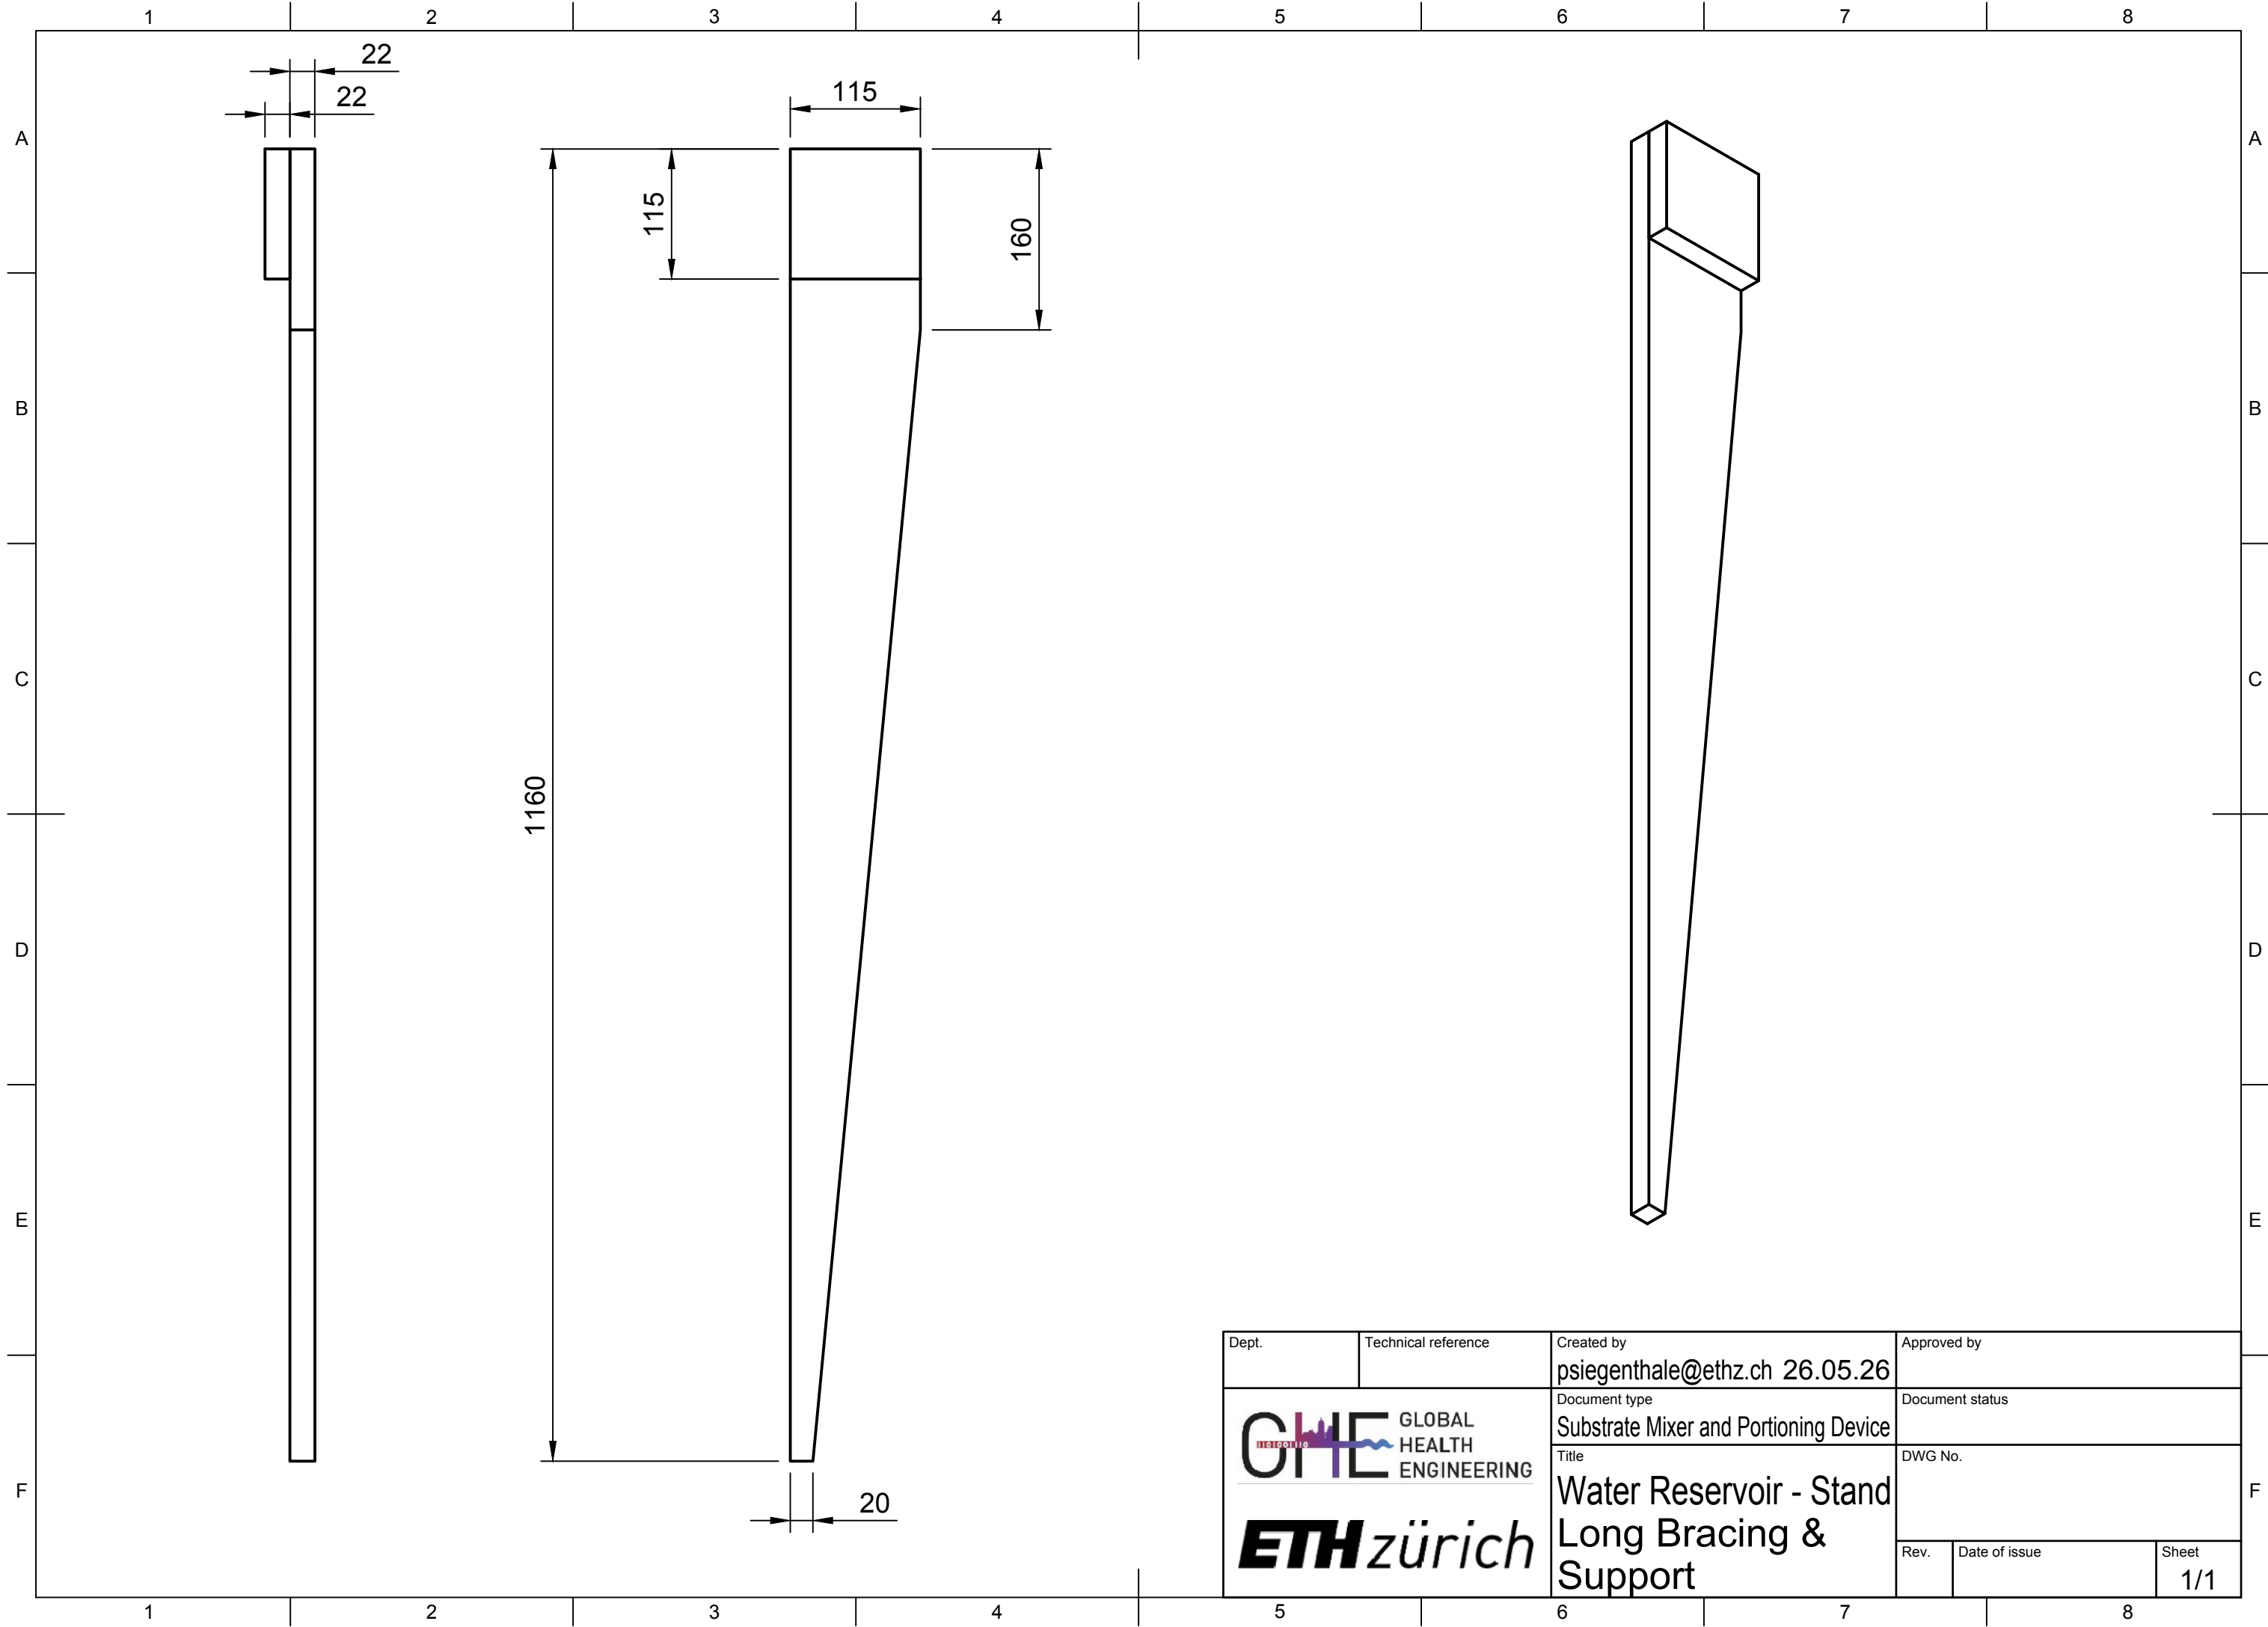

Dept.	Technical reference	Created by psiegenthale@ethz.ch 26.05.26	Approved by
 ETH zürich		Document type Substrate Mixer and Portioning Device	Document status
		Title Water Reservoir - Stand Long Bracing & Support	DWG No.
		Rev.	Date of issue
		Sheet 1/1	

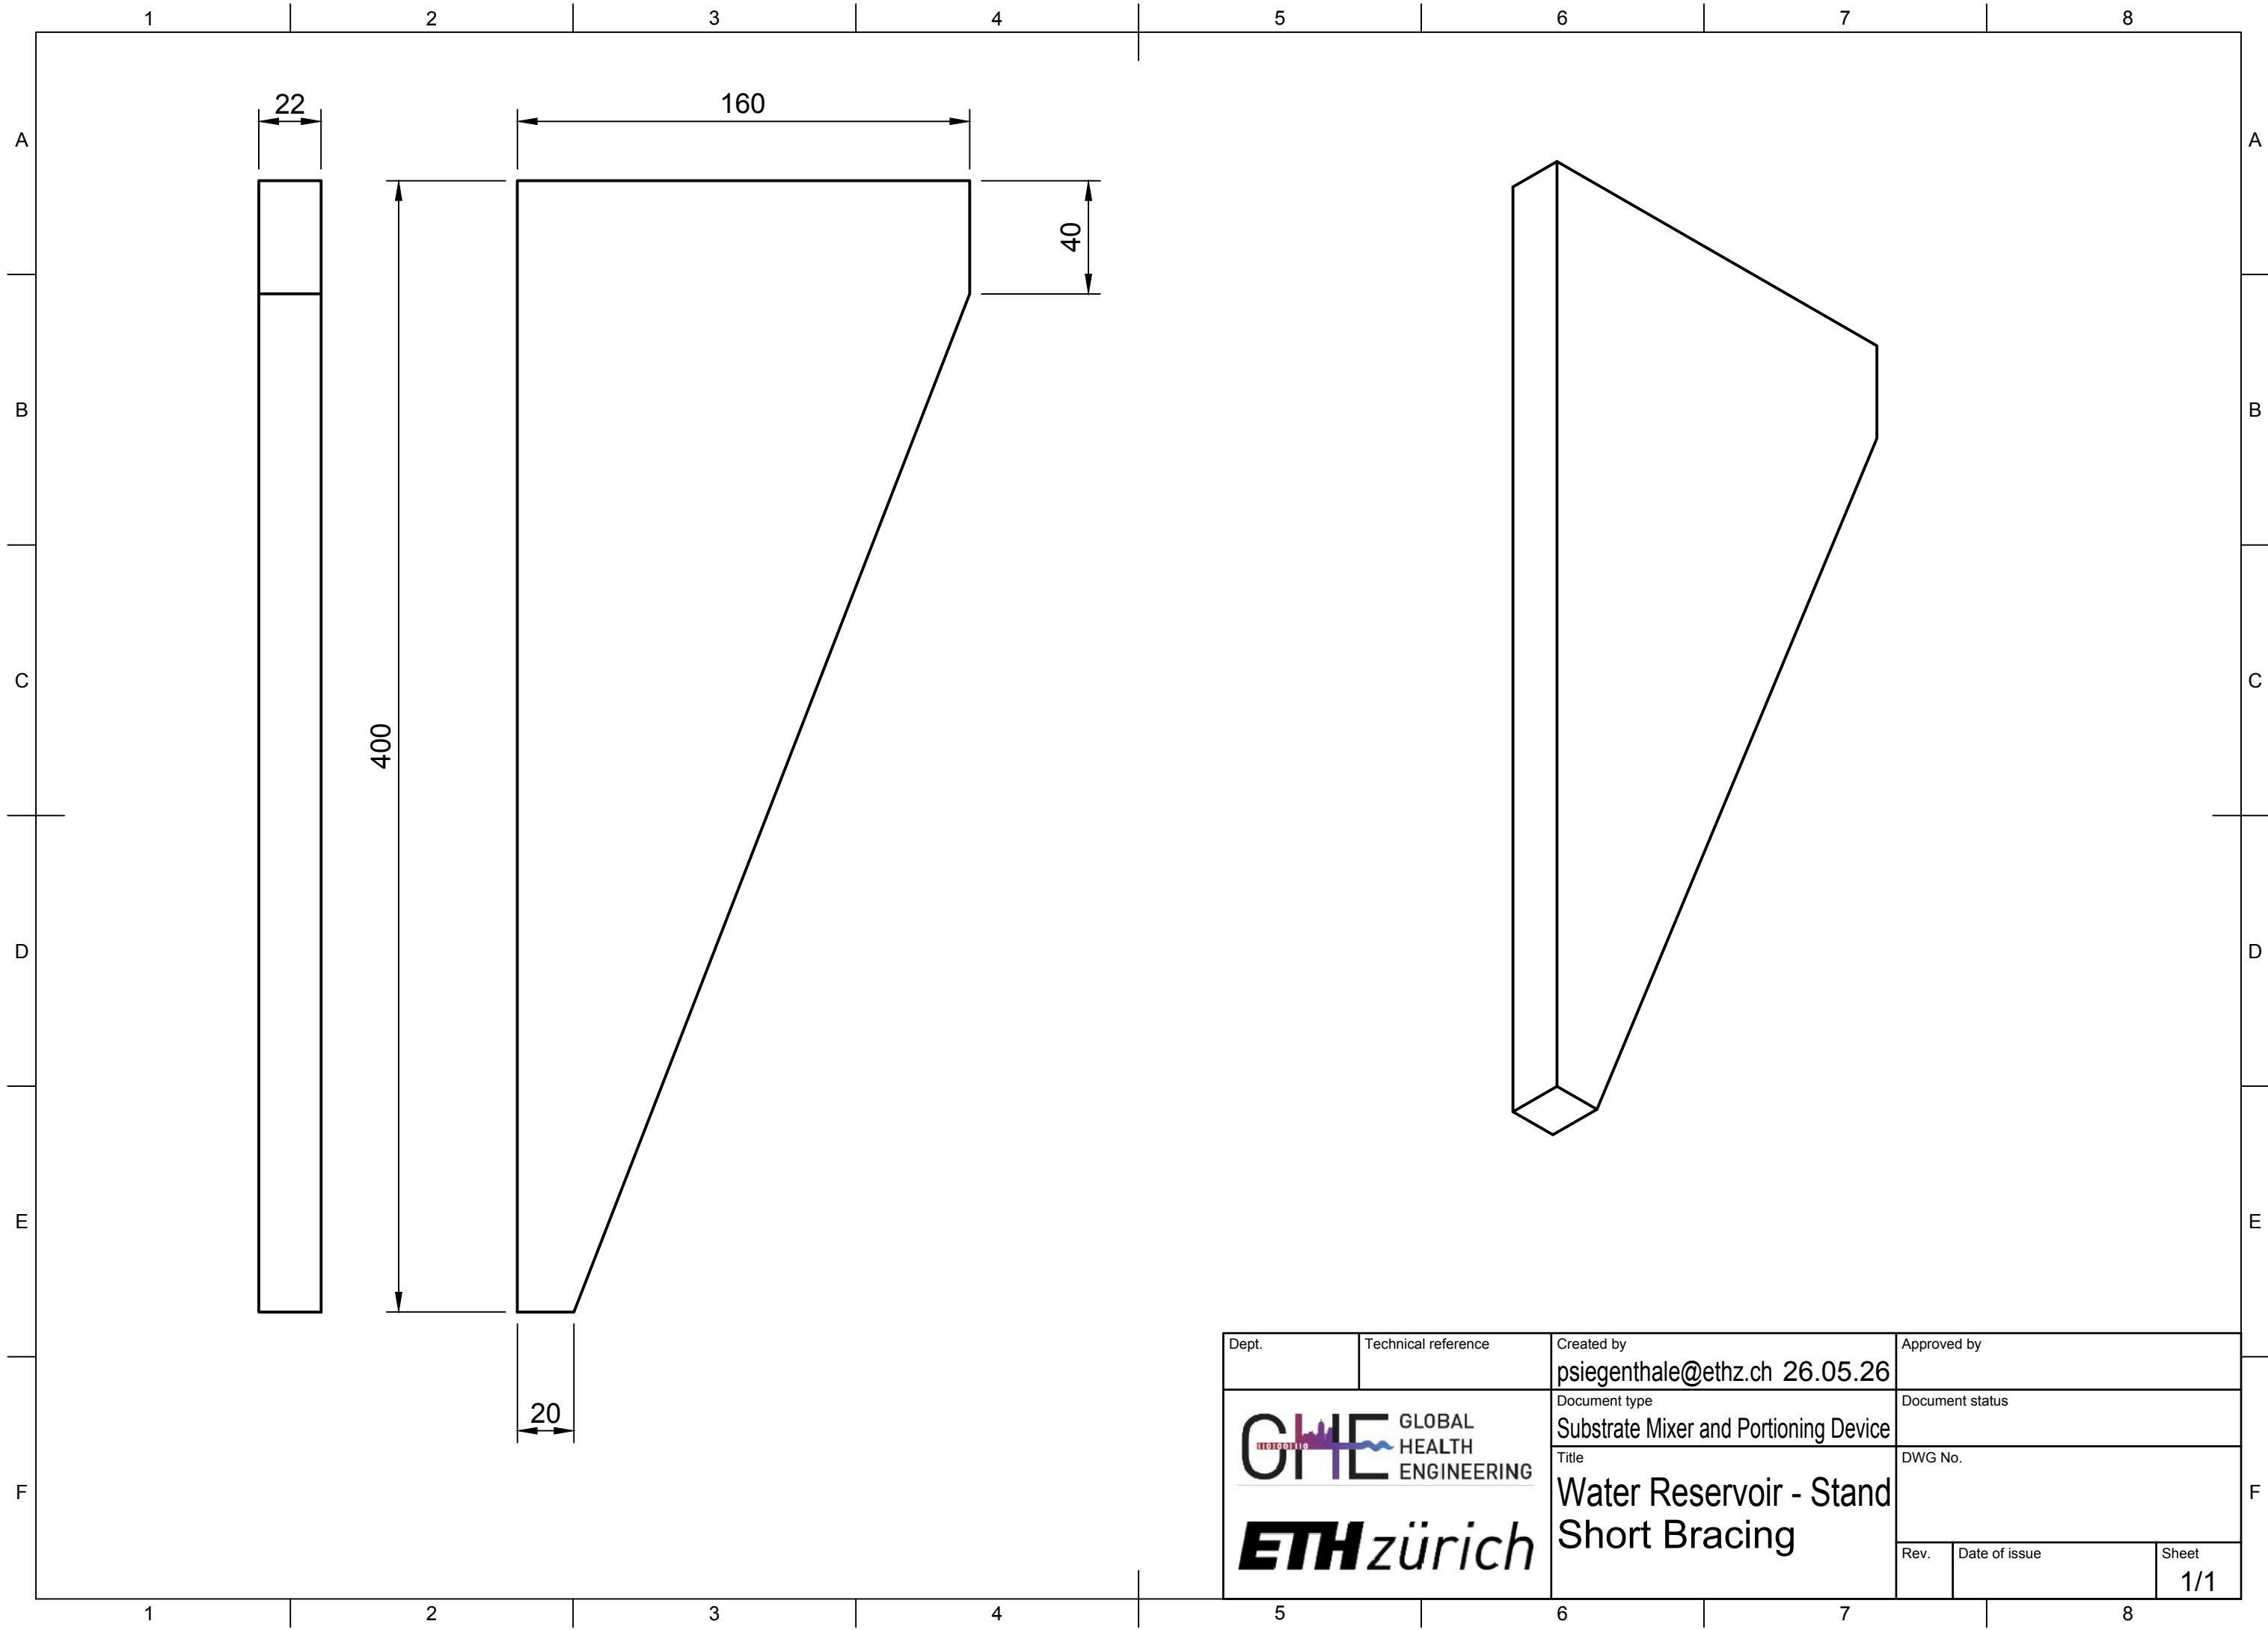

Dept.	Technical reference	Created by psiegenthale@ethz.ch 26.05.26	Approved by
 GLOBAL HEALTH ENGINEERING 	Document type Substrate Mixer and Portioning Device		Document status
	Title Water Reservoir - Stand Short Bracing		DWG No.
	Rev.	Date of issue	Sheet 1/1

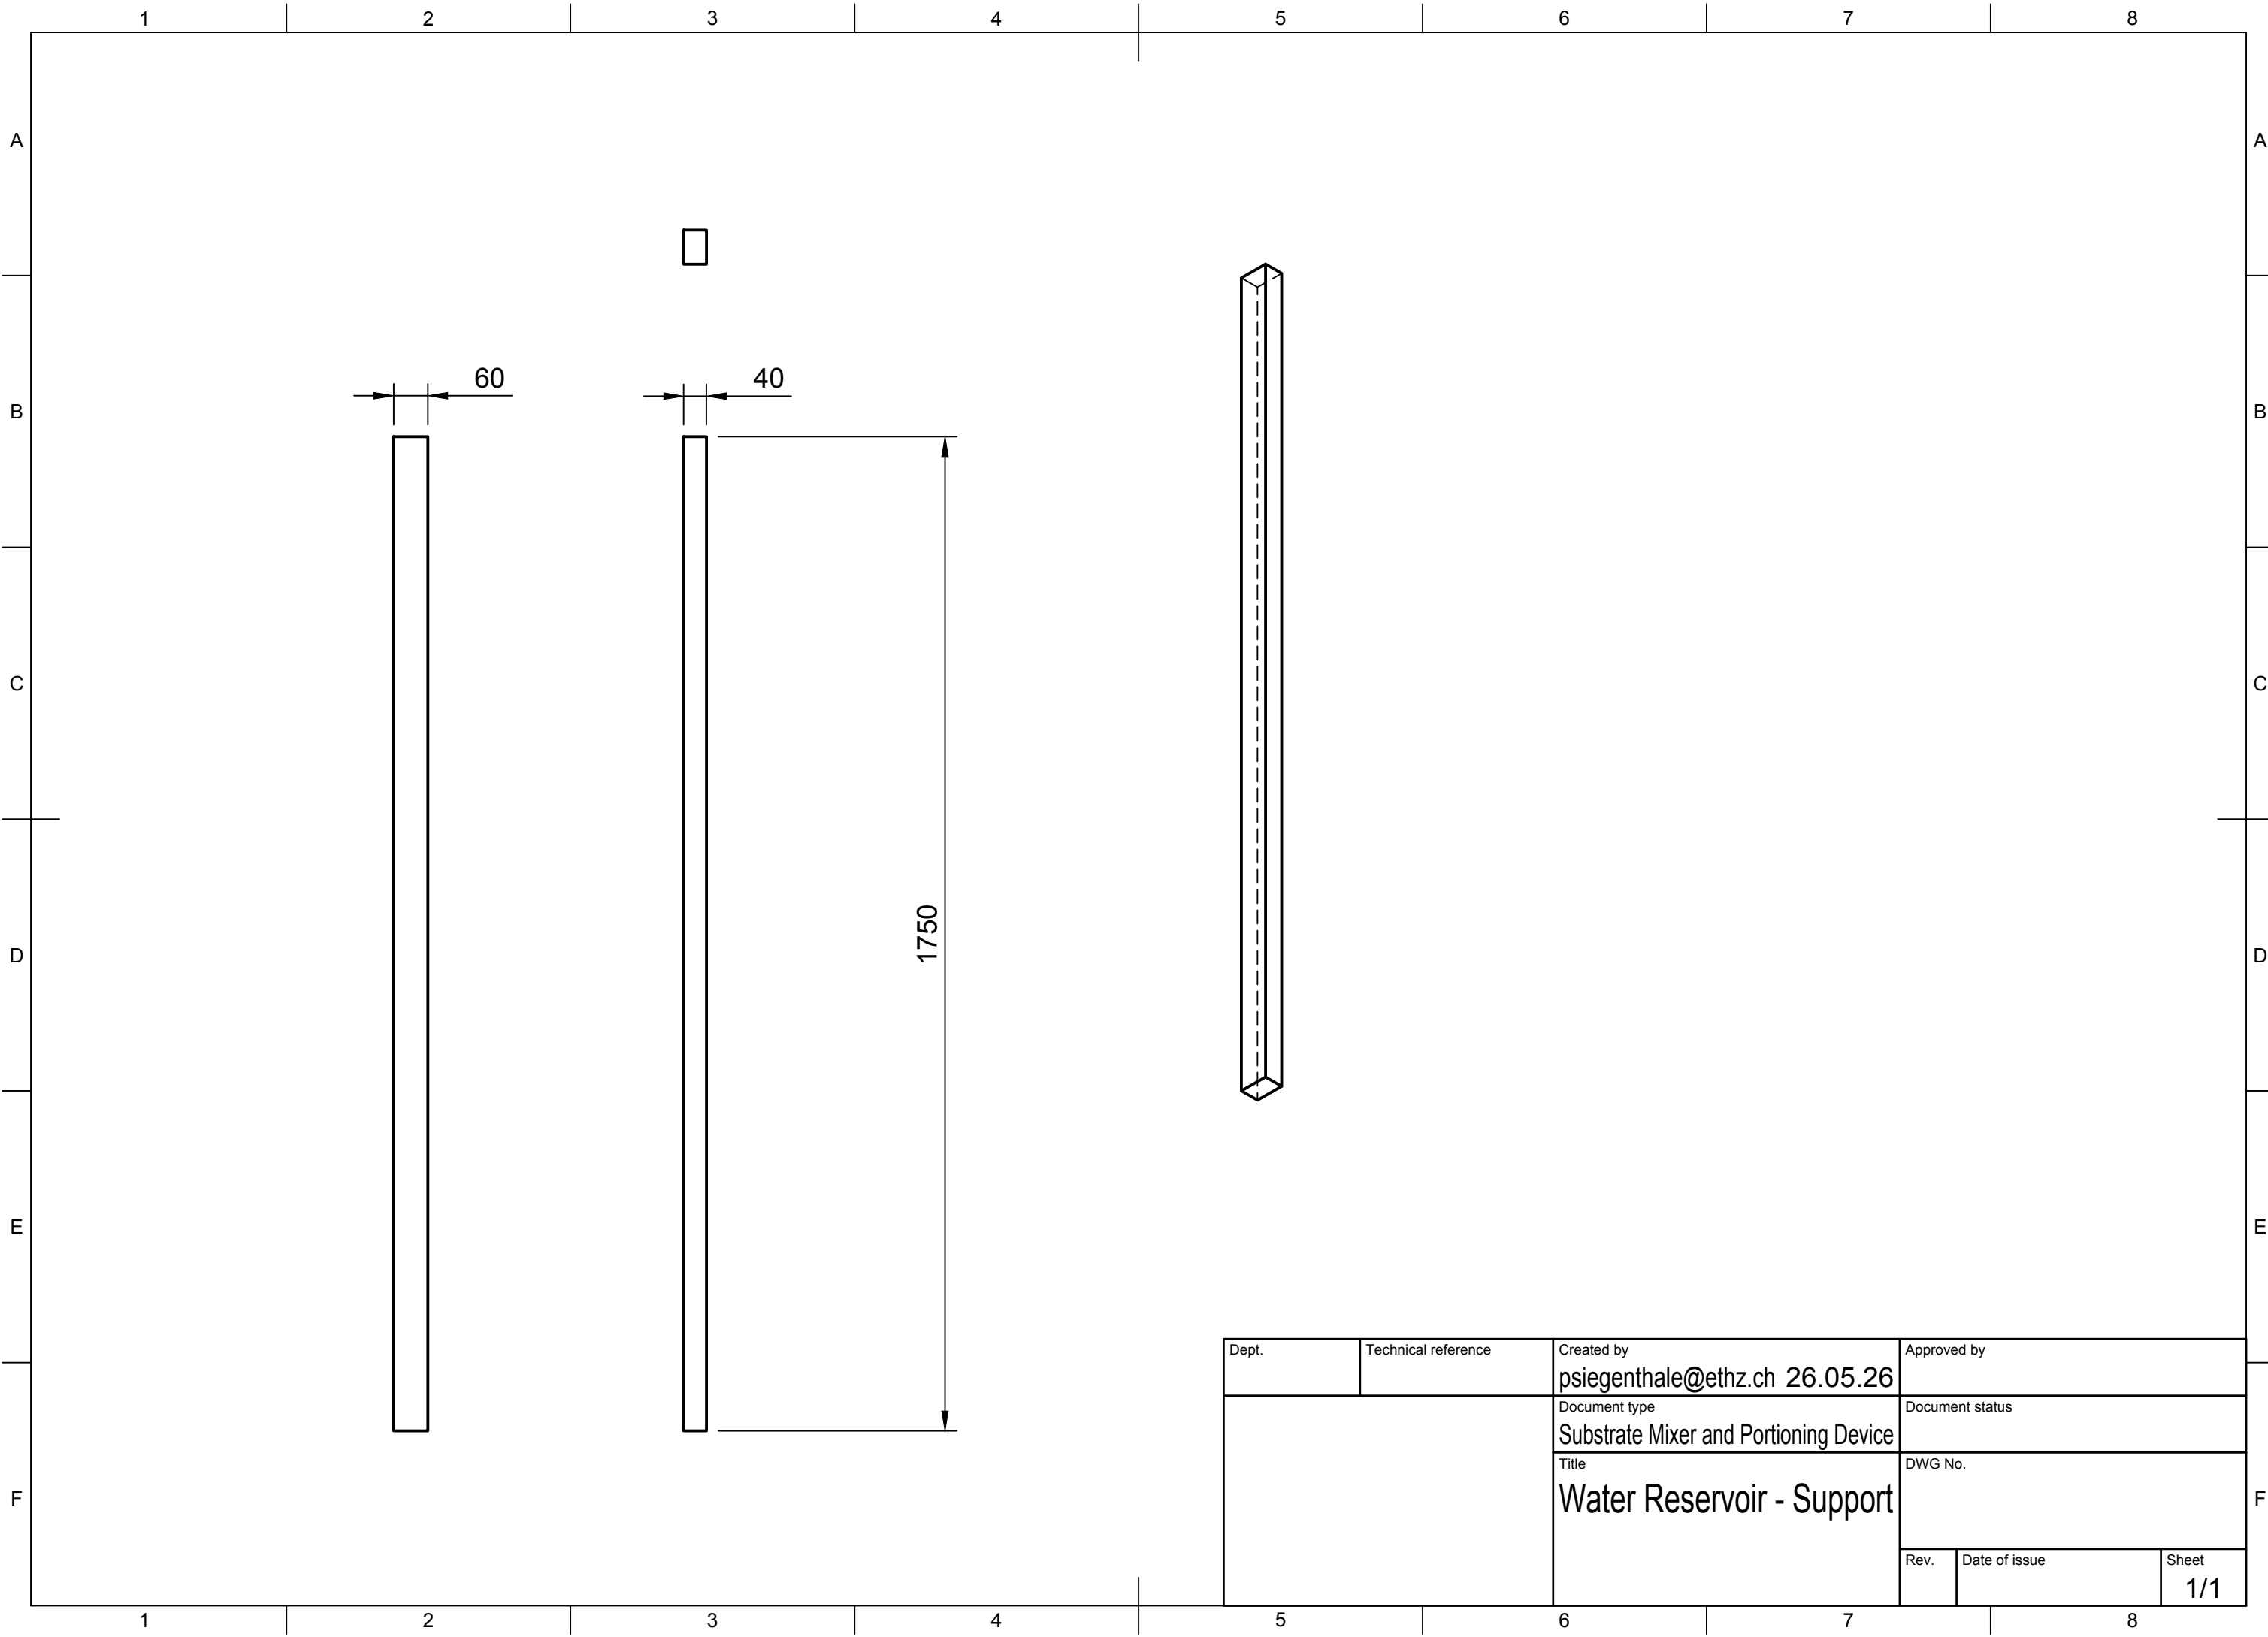

Dept.	Technical reference	Created by psiegenthale@ethz.ch 26.05.26	Approved by
		Document type Substrate Mixer and Portioning Device	Document status
		Title Water Reservoir - Support	DWG No.
		Rev.	Date of issue
		Sheet 1/1	

