

12

11

10

9

8

7

6

5

4

3

2

1

H

H

G

G

F

F

E

E

D

D

C


C

B


B

A

A

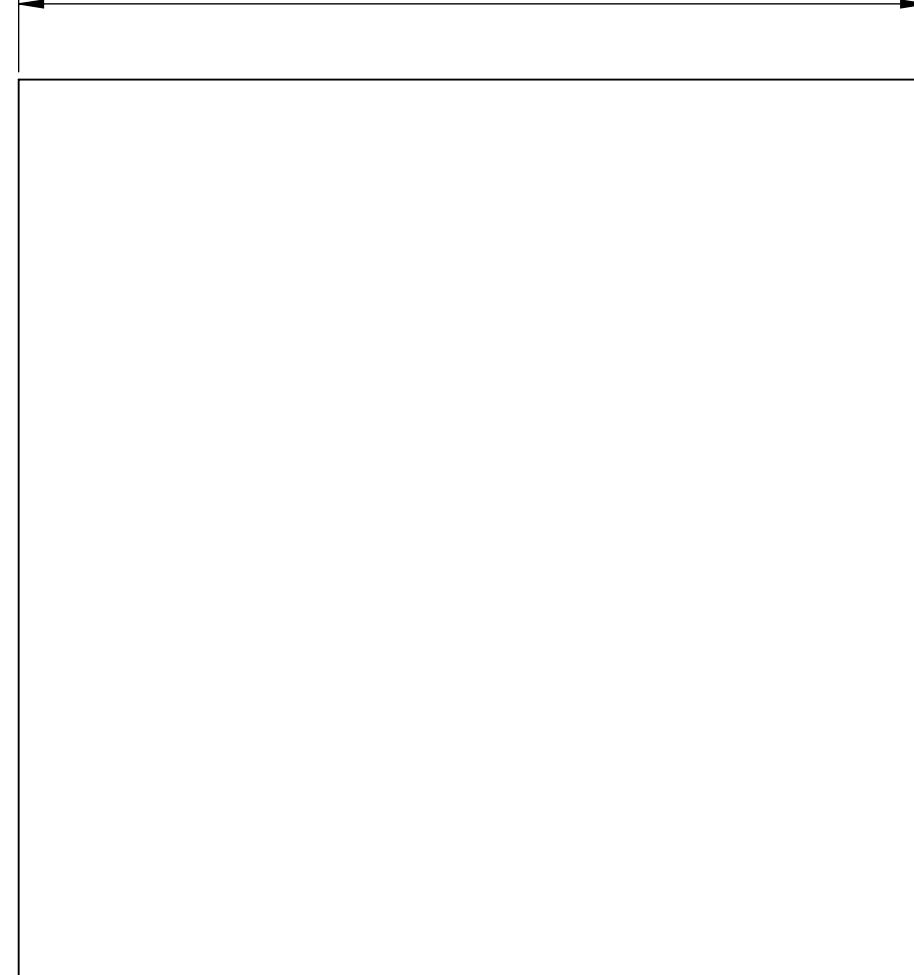

(0.0029in)
COPPER THICKNESS: (0.0014in)
ADHESIVE THICKNESS: (0.0015in)

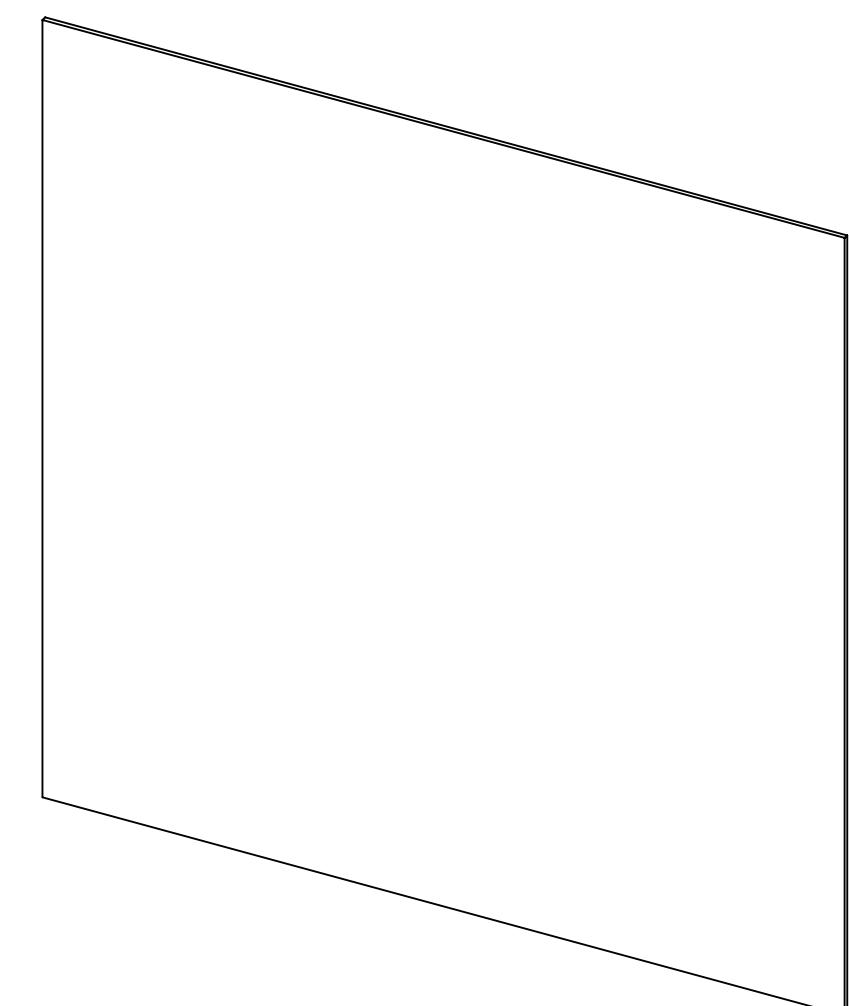

- NOTES:
 • CUT FROM MCMASTER-CARR 76555A73 COPPER FOIL TAPE

GH+ Labs <small>PROPRIETARY AND CONFIDENTIAL</small>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BREAK EDGES, .005-0.10	DRAWN	CN	9/15/2025	TITLE:
	BLEND ALL RADII, REMOVE ALL BURRS SURFACE FINISH: 125 Ra MAX	APPROVED			DESCRIPTION:
	ANGULAR: MACH: ±0°30', BEND: ±3° ONE PLACE DECIMAL: ± .030" TWO PLACE DECIMAL: ± .010" THREE PLACE DECIMAL: ± .005"	MATERIAL:	COPPER		HEAT SPREADER, VALVE
	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5 - 2009	FINISH:			
		PROJECT:	NAATOS	SIZE DWG. NO.	B 0008-006-00 REV.
		DO NOT SCALE DRAWING		DRAWING SCALE	10:1 SHEET 1 OF 1