

# Global Hemp Solutions



**GLOBAL HEMP**  
SOLUTIONS

**Automatic Electrical-heated Hemp Dryer**

**5-layers, 1000 pounds/hr**

Continuous drying machine



# Global Hemp Solutions

No.	Description	Specification	QTY /sets	Price/set FOB Qingdao	Options
1	Feeding conveyor	13.8ft*7.2ft*11.5ft	1	\$5,000	/
2	Continuous dryer main body	32.8ft*10.5ft*12.1ft 5-layers	1	\$77,000	UL Motors: \$8,000 (\$1,000/motor-8motors)
3	Electric heating tube	5.9ft*16mm Power:4kw/piece	176	\$10,500	/
5	Electricity Distribution Controller	Sus304, including Electrical components CHNT brand	1	\$2,500	Touch Screen: Additional \$3,000
6	Discharge conveyor	13.1ft*2.0ft*8.2ft Power:0.55kw	1	\$5,000	/
Total price (FOB Qingdao)			2	\$100,000	\$111,000
Shipping (sea) freight (2x40'containers+1x20'container)				TBD	TBD
Total price (Shipping not included)				\$100,000 USD Plus Shipping	\$111,000 USD Plus Shipping/Tariffs

## Remarks:

1. Lead Time: Approximately 30 days after receiving the deposit, system is shipped.
2. Terms of payment: 50% TT in advance and 50% against balance before shipment.
3. We can guarantee the quality of the above machines for one year.
4. Installation and debugging cost: The seller is responsible for the installation guidance and commissioning. The buyer needs to reimburse the workers' lodging and round-trip expenses, and subsidy \$150usd/person per day till Installation completed.

## 1. Introduction

This equipment is a belt type multilayer reverse dryer. The main parts are made of high quality carbon steel. The stainless steel mesh belt is made of SUS304, it runs smoothly, easy to maintain and has a long service life. The whole machine running speed and drying temperature can be adjusted according to your production needs. It has a high degree of automation, saving labor and improving production efficiency.



# Global Hemp Solutions

## II. Fundamental

1. The working principle is that the air heated by the heating tubes in the dryer chamber, is blown by circulation fans into the inside of the drying cabinet body, so that the moisture of the product is evaporated under the heat. Evaporated under the action, the generated moist air is discharged to the outside of the device with the exhaust pipe. The machine can continuously feed and make the material run smoothly. During the material conveying process, the gap is conveyed through the intermittent mesh belt to realize the turnover of the material and reach the homogeneity of the heated wind on all surfaces. It can connect with other equipment to achieve continuous operation.

Electric heating tube:

The produced hot air is dry without moisture, conductivity, combustion, explosion, chemical corrosiveness, pollution, safety and reliability, and the heating space is heated rapidly (controllable).

# Global Hemp Solutions



2. Each unit of mesh belt dryer has independent circulation of hot air. Part of the wasted gas is discharged by a special dehumidifying fan. The exhaust gas is controlled by a regulating valve. The hot gas makes the material up or down on the mesh belt by heating to dry biomass and remove the moisture. The mesh belt moves slowly, the operating speed can be adjusted freely according to the material temperature, and the dried product continuously falls into the receiver. Up and down cycle can be flexibly configured according to user needs, and the number of units can be selected according to the need. The amount of air, heating temperature, material residence time, and heating rate can be adjusted to achieve the drying effect.

3. Due to the low temperature of the material, the equipment is completely closed, only leaving the openings necessary for the discharge, so the effect of dehumidifying is good.



# Global Hemp Solutions

4.The unique air intake device makes the distribution of hot air more uniform and ensures the consistency of product quality.


(Display of Hot Air Circulating direction)



5.Heating system, temperature-controlled multi-position design and high air circulation fan can make internal heat fully dispersed in every corner of the interior. Make sure there are no dead ends.

# Global Hemp Solutions

Uniform temperature, ideal for air drying and drying products.

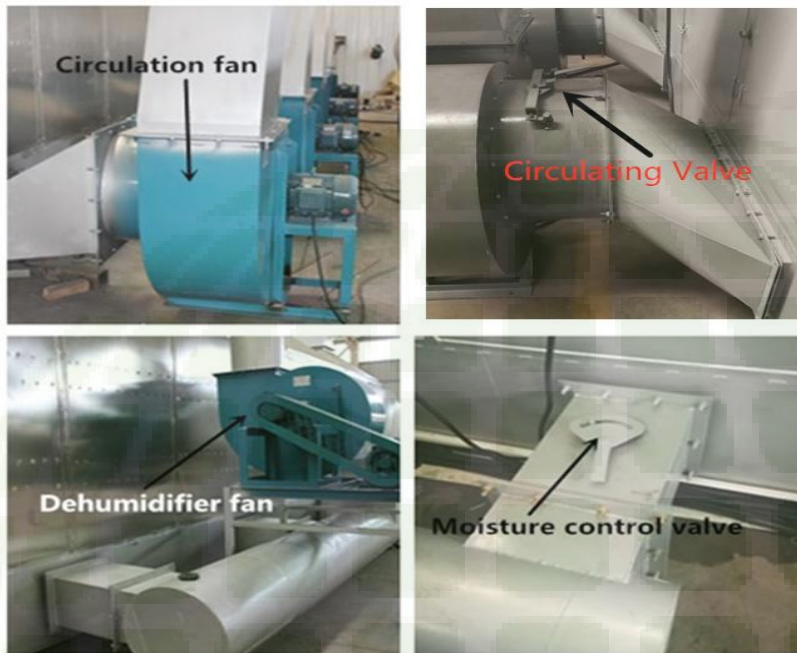

- a. Circulation fan: The circulating fan can blow the hot air generated by the electric heating tubed into the dryer chamber.
- b. Dehumidifier fan: It can discharge the damp air.
- c. Moisture control valve: When the air temperature rises, the valve can be enlarged a little. It can accelerate the removing of moisture.

# Global Hemp Solutions

## III. Overall appearance and layout of dryer

### A. External structure and details



**For 5-layer dryer, the feeding and discharging are in the opposite direction.**



# Global Hemp Solutions




moisture  
remove fan



Moisture removal switch

Feeding device can be  
equiped as required




lock:Flexible design can check  
work status at any time



chain sprocket:Good wear resistance,  
High strength and tensile properties



frame:Carbon steel structure,  
Longer service time by gas shielded



Woven mesh, food grade stainless  
steel, tough, good ventilation




# Global Hemp Solutions

Observing window: Through the observing windows, drying level can be judged.



Mesh belt: is made of SUS 304, its width is 1800mm.

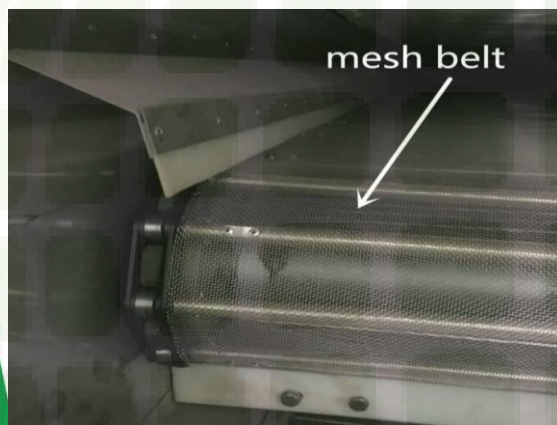


## B. Electrical controller

This kind controller is easy to operate and maintain. it includes the electronic control switch and electrical components used in the whole system.



# Global Hemp Solutions

## C. layout of dryer& overhead view

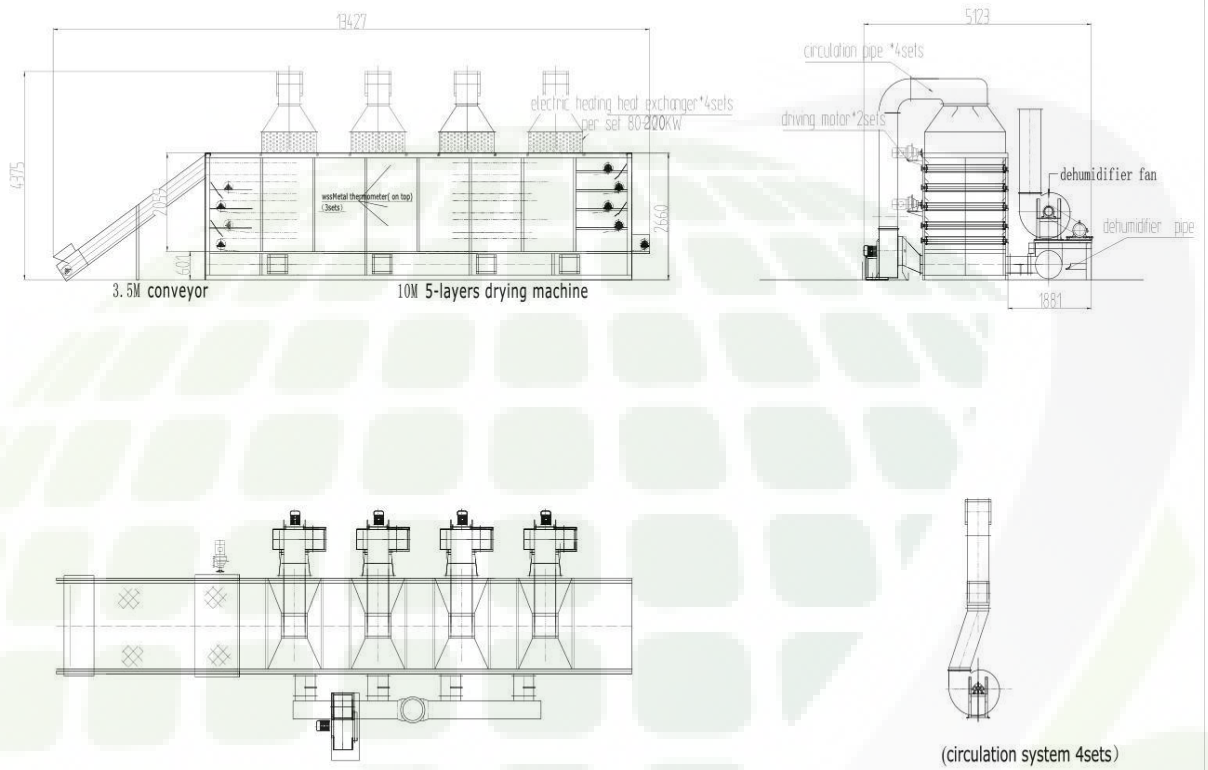

## D. discharge elevator(customized length and height)



## **Global Hemp Solutions**

### **IV. Material allocation and total price:**

#### **1. Feeding machine:**

Material: Carbon steel, Mesh belt sus304.

Dimension: 13.8ft\*7.2ft\*11.5ft, Slope length 14.8ft.

#### **2.Mesh belt Continuous Drying machine:**

Dimension:32.8ft\*7.2ft\*12.1ft

Capacity:1000pounds/hr(calculated by wet hemp)

Voltage: industrial voltage 3 phase, 440v--480v/60hz, can be designed according to client's local voltage.

Electric heating power: 704kw.

Electric heating tube power is 4kw/piece, total 176pieces. Ensure the normal operation of the equipment, clients need a 1000kW voltage stabilizer , please consult the local power department.

Electric current: 1200A-1350A.

Mesh belt: made of 304SUS, width1800mm

Drive power:3kw\*1set,2.2kw\*1set.

Circulation fan:4kw\*4sets.

Air-blower:11kw\*1set.

Centrifugal exhaust fan power:5.5kw\*1set.

Total power:740kw. (If a generator unit is needed, its power should exceed 1200kw, about equal to 1500KVA.)

## Global Hemp Solutions

### Machine List of Complete Dryer line

Name	Type	Specification	Remark
Structural plate steel	Carbon steel	2.0mm	
Transmission shaft	Carbon steel	Ø50	
Insulation shield	Carbon steel	1.2mm	
Support leg	Carbon steel	60*80*3.0mm	
Mesh belt	SUS304	Width 1800mm	
Transferring gear	SUS304	9-teeth gear	
Insulation Materials	Aluminum silicate board	50mm thick	
Conveyor speed reducer			
Temperature Controller		A1208	
Temperature Sensor		WP-236	
Electricity Distribution Controller(control panel)	SUS304	1.2mm	Double layer waterproof function
Electric appliances			
Frequency converter			
Mesh support shaft	SUS304	spacing150mm	fulcrum shaft 16mm





## Global Hemp Solutions

Circulation fan	Carbon steel, 4sets, power:4kw*4
Centrifugal Exhaust fan	Carbon steel, 5.5kw*1set
Air-blower	Carbon steel, 11 kw*1set.
Electric heating tubes	176pieces, power:4kw/piece Total power:704kw
Discharge conveyor	13.2ft*2.0ft*8.2ft      Power:0.55kw
<b>Total</b>	<b>CIF US Port \$111,000 USD (Based on client options)</b>
<b>Notes</b>	1.Equipment quality warranty for one year.
	2. <b>Payment Terms:</b> T/T, deposit 50% to start production. Remaining 50% is due prior to shipping
	3. <b>Installation and debugging:</b> The cost of round-trip ticket, aboard lodging, the cost of the visa and the subsidy of US\$150 per person every day, paid by the client. Manufacturer is responsible for the installation guidance, debugging, technical guidance, meanwhile the client must provide the local necessary manpower and equipment support, such as cranes, porters, etc.
	4.delivery time :25days-30days



# Global Hemp Solutions



# Global Hemp Solutions

## Our company

Global Hemp Solutions is your all inclusive post-harvest processing and extraction equipment provider. We have partnerships with some of the world's largest and best manufacturers. We not only provide you with the best equipment to help make you successful, we are there every step of the way even after the installation of the equipment. We value long term relationships and are truly here to serve you.



**GLOBAL HEMP**  
SOLUTIONS

All prices and shipping times subject to change. Please contact us for updated lead times and pricing.



[Sales@Global-Hemp-Solutions.com](mailto:Sales@Global-Hemp-Solutions.com)