GMFPC101 Digital Force Sensor

General Introduction

GMFPC101 is a digital force sensor especially designed for consumer applications like touch panels, seamless buttons, styluses, and smart shoes. It is assembled on an FPC with a thickness less than 0.4mm. The force sensor is based on the industry-recognized piezo-resistive technology featuring long-term stability and EMC robustness. A high-performance 24-bit ADC provides extra fine force resolution up to 0.1mN. The force sensor is capable of measuring forces up to 5N.

Focusing on micro force (less than 1N) measurement, the high sensitivity, and the high resolution makes GMFPC101 especially suitable for applications that detect forces of delicate hand related movement such as finger taps or pen drawing.

Features

❍ Operation range:
  - Force: 0~5N
  - Temperature: -40~+85℃

❍ Built-in 24-bit ADC:
  - Force resolution: up to 0.1mN

❍ Digital interface:
  - I2C supporting both standard (100kHz), and fast (400kHz) mode
  - SPI 3-/4-wire, up to 10MHz clock

❍ Supply voltage:
  - VDD: +1.8V ~ +3.6V
  - VID: +1.2V ~ +3.6V

❍ Power Consumption:
  - Standby ~ 1uA

❍ RoHS-compliance package:
  - FPC package
  - FPC size: 30 × 4.5 mm²
  - Height: 0.65±0.1 mm.

Applications

Force buttons, active styluses, digital pianos, gaming, robotic end-effectors, and insoles of smart shoes

Top View

Side View
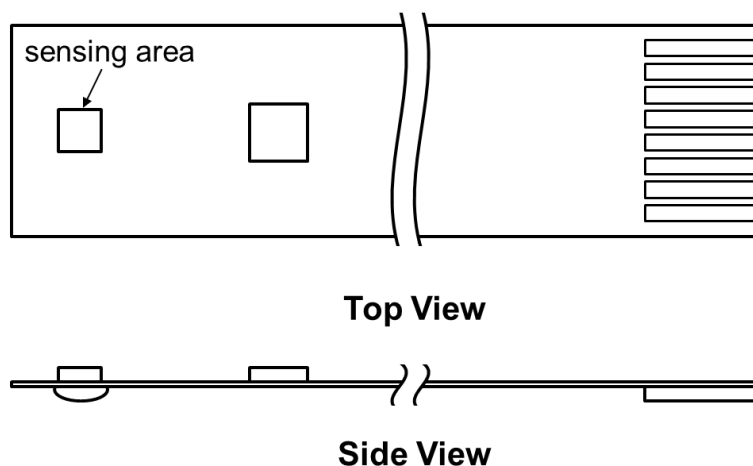
Specifications

Table 1: Pin Descriptions

Pin#	Name	Description
1	GND	Ground pin
2	SDO	I2C slave address select pin SPI data output pin
3	SCK/SCL	I2C/SPI clock pin
4	SDI/SDA	I2C data I/O pin SPI data input pin
5	CSB	SPI chip select
6	NC	No connection inside
7	VID	Digital interface power supply in
8	VDD	Core circuit power supply in

Table 2: Specification

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Operation voltage	VDD		1.8	—	3.6	V
IO voltage	VID		1.2	—	VDD	V
Temperature range	Ta		-40	25	+85	°C
Force range	F		0	—	5	N
Operation current OSR=256 **OSR=1024(default)** OSR=4096 OSR=16384 OSR=32768	IDD	VDD = 3.3V, 20Hz, forced mode	—	97 **120** 190 420 800	—	uA
Standby current	IDDSD	After POR or soft reset	—	1	—	uA
Full scale span	FS			5,000,000		LSB
Zero offset				11,000		LSB
Sensitivity			—	500,000	—	LSB/N
Linearity[1]				±1		%FS
Noise (RMS)				100		LSB

1. Calibration is required.

Table 3: Absolute Maximum Rating

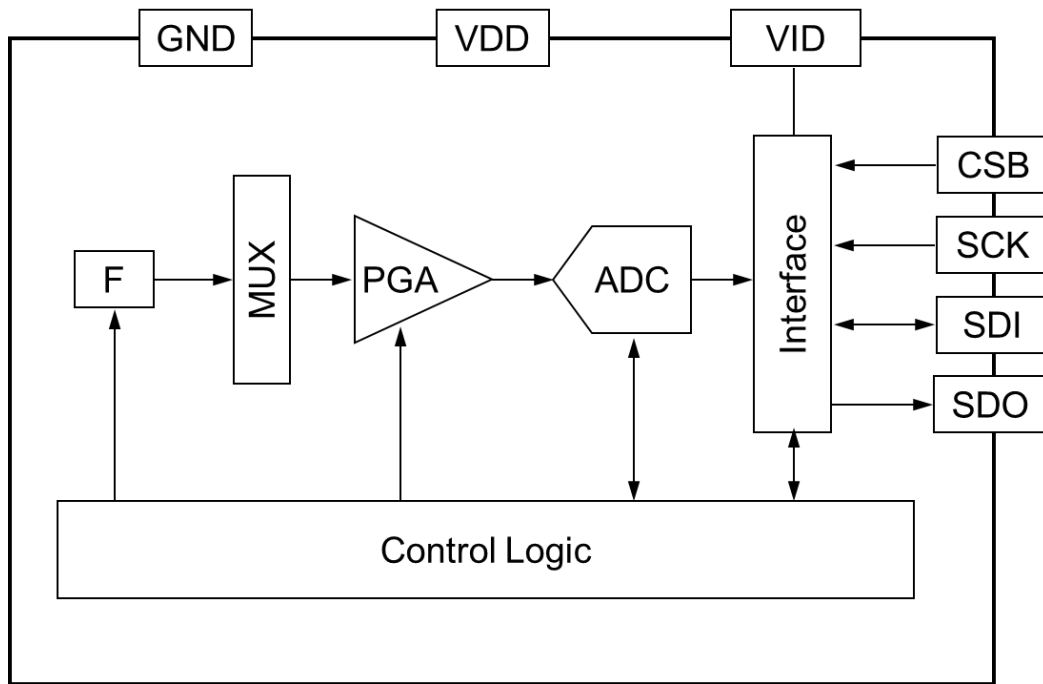| Parameter	Symbol	Min.	Max.	Unit
Power supply voltage	VDD, VID	-0.3	6.5	V
Signal input voltage	VIS	-0.3	VDD/VID + 0.3	V
Overload force	FMAX	0	10	N
Storage temperature	TST	-40	+125	°C
ESD	HBM	—	±2	kV

Block Diagram and Connection
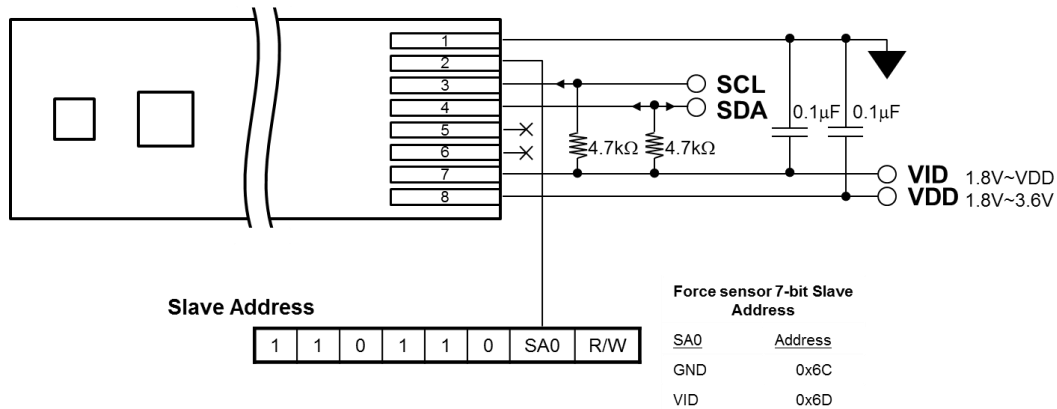

Figure 1: GMFPC101 Block Diagram

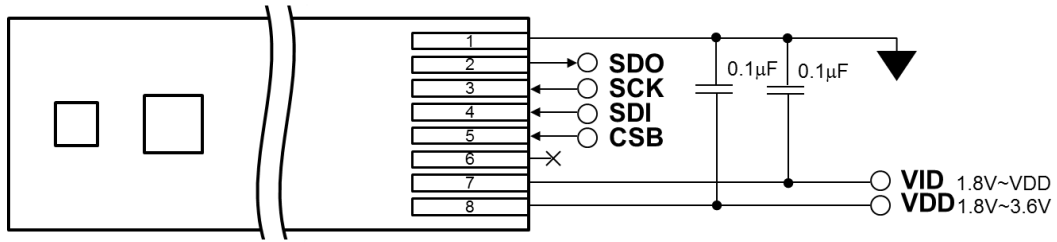Figure 2: GMFPC101 I2C Connection Example

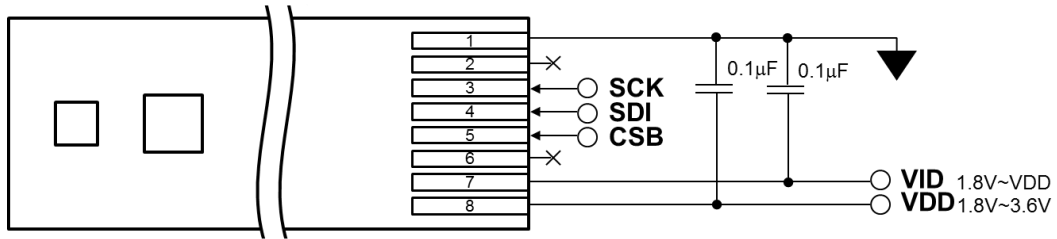Figure 3: GMFPC101 SPI 4-Wire Connection Example

Figure 4: GMFPC101 SPI 3-Wire Connection Example

Functional Description

Power Management

GMFPC101 has two separate power supply pins: VDD and VID. VDD is the major power supply pin for all internal analog and digital functional blocks. VID provides a reference voltage level for the digital interface.

When the power is set on, power-on reset (POR) circuit will be active to reset the internal circuits and registers. After the POR sequence, all registers will be initialized to the default values and GMFPC101 will transit to standby mode.

Reset Functions

GMFPC101 has two types of reset as summarized below:

- Power-on reset (POR): as described in the previous Power Management section.
- Soft reset: Set RESET register (00h) to 0x24 will trigger the device soft reset by resetting all register to default values.

Initialization

GMFPC101 will automatically initialize to standby mode upon power-up after POR. It is recommended to set RESET register (00h) to 0x24 for device soft reset for initialization.

Power Modes

GMFPC101 offers two power modes, standby and Forced mode, by setting the 30h[3:0] (Measure_CTRL[3:0]) bits, see 30h register description for more detail.

The transitions between different modes are illustrated in Figure 5.
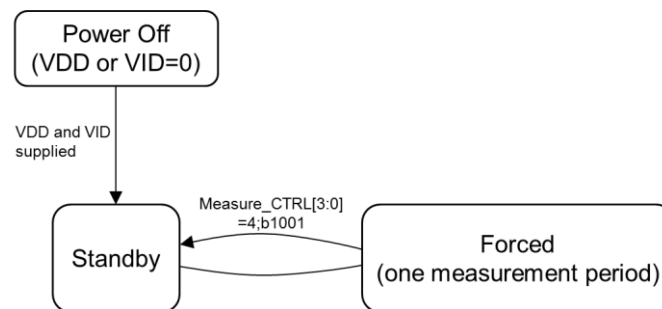

Figure 5: Mode transactions diagram

- Standby mode

GMFPC101 will enter standby mode after complete POR sequence. In this mode, data measurement stops and the power consumption is at the minimum. All registers, including PID and calibration parameters, are accessible.

- Forced mode

In the Forced mode, GMFPC101 will take one-time force measurement and returns to standby

Make sense of the world

mode automatically. The measurement results can then be obtained from the force data registers. Users need to set to the Forced mode again to have another force measurement. The timing diagram of the Forced mode is illustrated in the following Figure 6.

Before set to the Forced mode, make sure the A5h[1] (Raw) bit value is 1'b1 in order to have the raw force ADC output. Below summarized the single shot pressure conversion steps:

1. Make sure A5h[1] (Raw) is set. If not, set A5h = 0x02.
2. Set to the Forced mode by set 30h = 0x09.
3. Check 02h[0] (DRDY) bit and wait until its value is set. The data is available in the registers when DRDY = 1'b1.
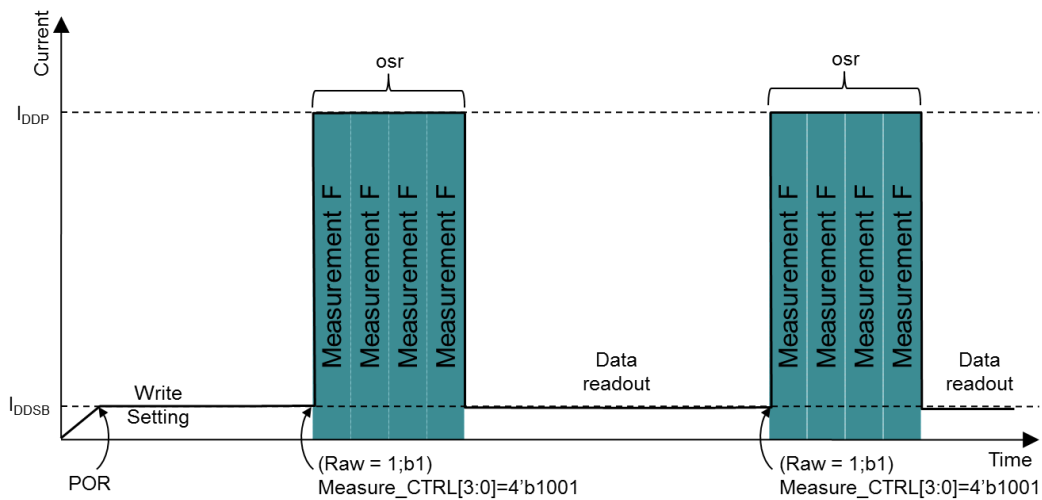4. Read the raw force ADC output from the force data registers (06h~08h).

Figure 6: Forced mode timing diagram

User Register Map

Table 4: User Register Map Table

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
00h	RESET	SPI4W	R'ved	RST	0	0	RST	R'ved	SPI4W	RW	0x00
01h	PID	PID[7:0]								R	0x00
02h	STATUS	Reserved				0	0	0	DRDY	R	NA
06h	FORCEH	Force [23:16]								R	NA
07h	FORCEM	Force [15:8]								R	NA
08h	FORCEL	Force [7:0]								R	NA
30h	CMD	Reserved				Measure_CTRL[3:0]				RW	0x00
A5h	CONFIG1	Reserved						Raw	R'ved	RW	0x00
A6h	CONFIG2	Reserved					OSR[2:0]			RW	0x00

Description of Registers

Register 00h: RESET Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
00h	RESET	SPI4W	R'ved	RST	0	0	RST	R'ved	SPI4W	RW	0x00

Set RESET register (00h) to 0x24 to trigger the device soft reset. All register values will be reset to default. The RST bits will automatically return to 1'b0 when the soft reset complete.

SPI4W bits control the 3-/4-wire SPI selection. Default 0x00 is 3-wire SPI interface. Set 0x81 to RESET register (00h) will switch to the 4-wire SPI.

Register 01h: PID Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
01h	PID	PID[7:0]								R	0x00

PID is the product identification register and the value is fixed to 0x00. This register is available for reading after the device finished the power-on-reset.

Register 02h: STATUS Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
02h	STATUS	Reserved				0	0	0	DRDY	R	NA

The DRDY bit will be set once the data conversion is complete. The output data is ready for reading from force data registers.

Register 06h~08h: Force Data Registers

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
06h	FORCEH	Force [23:16]								R	NA
07h	FORCEM	Force [15:8]								R	NA
08h	FORCEL	Force [7:0]								R	NA

The force data output is encoded to a 24-bit value and stored across three bytes. Data representation is 2's complement, i.e. MSB (bit 23) is the sign bit with 1'b1 representing negative value.

The force data output is raw force sensor ADC value.

Register 30h: CMD Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
30h	CMD	Reserved				Measure_CTRL[3:0]				RW	NA

Measure_CTRL[3:0] control the signal conversion mode. After each single shot signal conversion, GMFPC101 will return to standby mode. Available setting is summarized in the following table.

Measure_CTRL[3:0]	Power Mode
4'b1001	Forced mode Make a single shot force conversion
Others	Reserved

Register A5h: CONFIG1 Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
A5h	CONFIG1	Reserved						Raw	0	RW	0x00

Set Raw = 1'b1 before making a single shot force conversion. This will output raw force ADC value to the force data registers (06h~08h).

Register A6h: CONFIG2 Register

Addr.	Name	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	Access	Default
A6h	CONFIG2	Reserved					OSR[2:0]			RW	0x00

OSR[2:0] selects the oversampling ratio for the force data conversion as summarized in the following table.

OSR[2:0]	Conversion Time (ms)	Oversampling Ratio	Typical Resolution (ENOB)
3'b000	2.5	1024	17.8
3'b001	3.78	2048	18.2
3'b010	6.34	4096	18.7
3'b011	11.46	8192	19.1
3'b100	1.54	256	17
3'b101	1.86	512	17.3
3'b110	21.7	16384	19.4
3'b111	42.18	32768	19.7

Make sense of the world

Digital Interface: I2C

I2C Interface General Description

The I2C interface is compliant with standard and fast I2C standard. The devices support the 7-bit control functions and SDA and SCL facilitate communication between GMFPC101 and master with clock rate up to 400kHz.

The 7-bit device slave address can be selected by the SA0 pin as summarized in the below table.

SA0	7-bit Slave Address
1'b0	0x6C
1'b1	0x6D

The I2C bus takes master clock through SCL pin and exchanges serial data via SDA. SDA is a bidirectional (input/output) connection. Both are open-drain connection and must be connected externally to VID via a pull-up resistor. The I2C interface supports multiple read and write. When using multiple read/write, the internal I2C address pointer will automatically increase by 1 for the next access.

I2C Access Format: Standard and Fast Mode

One data bit is transferred for each SCL cycle. The SDA must not change level when the SCL is high. The level changes in SDA while SCL is high are reserved control signals. The SDA and SCL remain high when I2C bus is idle.

Data transfer begins by bus master indicating a start condition (ST) of a falling edge on SDA when SCL is high. The master terminates transmission and frees the bus by issuing a STOP condition (SP). Stop condition is a rising edge on SDA while SCL is high. The bus remains active if a repeated START (SR) condition is generated instead of a STOP condition. Figure 7 illustrates the START and STOP condition.

Figure 7: I2C START and STOP condition
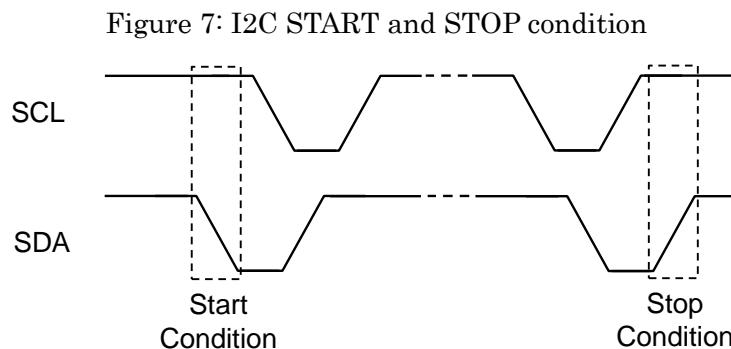
After a start condition (ST), the 7-bit slave address + RW bit must be sent by master. If the slave address does not match with GMFPC101, there is no acknowledge and the following data transfer will not affect GMFPC101. If the slave address corresponds to GMFPC101, it will acknowledge by pulling SDA to low and the SDA line should be let free by bus master to enable the data transfer. The master should let the SDA high (no pull down) and generate a high SCL

pulse for GMFPC101 acknowledge. Figure 8 illustrates the acknowledge signal sequence.
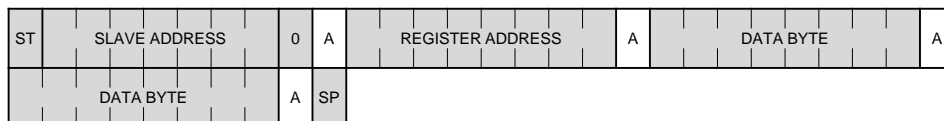
Figure 8: Acknowledge signal sequence
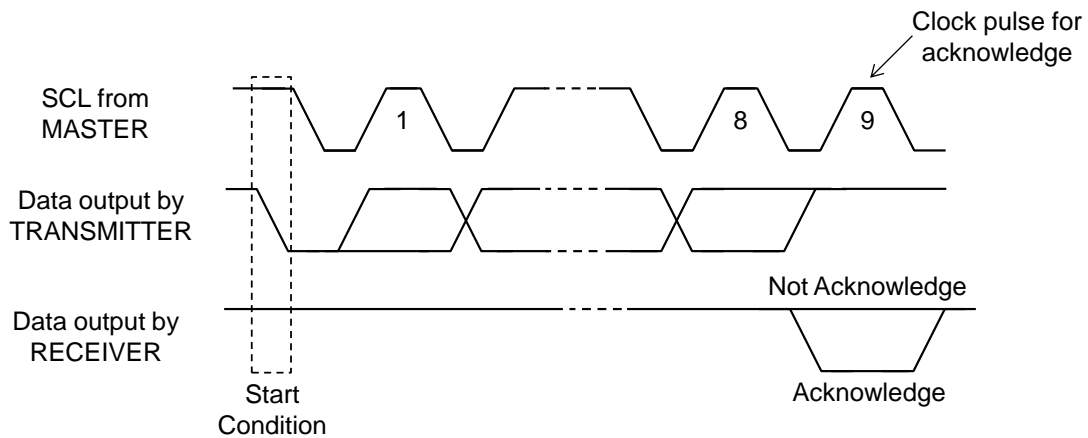
A write to GMFPC101 includes transmission of a START condition, the slave address with R/W bit=1'b0, one byte of data to specify the register address to write, subsequent one or more bytes of data, and finally a STOP condition. "Single Write" and "Multiple Write" in Figure 9 illustrates the frame format of single and multiple write to GMFPC101 respectively.

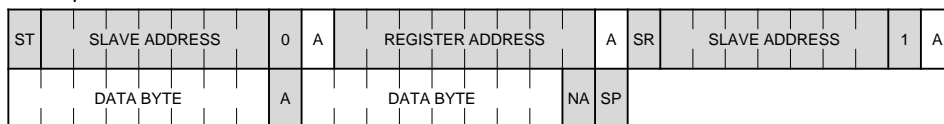Figure 9: I2C access format: standard and fast mode
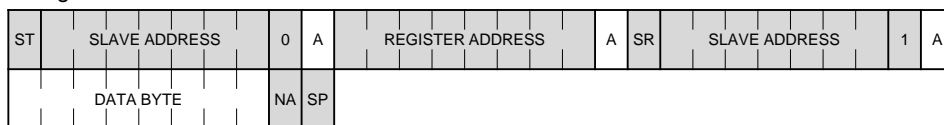
A read from GMFPC101 starts with transmission of a START condition, the slave address with R/W bit=1'b0, and one byte of data to specify the register address to read. A repeated START

condition and the slave address with R/W bit=1'b1 are transmitted subsequently. The slave address with R/W bit=1'b1 initiates a read operation. GMFPC101 acknowledge receipt of the read operation command by pulling SDA low during the 9th SCL clock and begin transmitting the contents starting from the specified register address. The master must acknowledge all correctly received bytes except the last byte. The final byte must be followed by a not acknowledge from the master and the STOP condition. "Single Read" and "Multiple Read" in Figure 9 illustrates the frame format for reading single or multiple byte from GMFPC101.

I2C Specifications

Table 5: I2C Timing Specification: Standard Mode

Parameter	Symbol	Minimum	Typical	Maximum	Unit
SCL clock frequency	f_{SCL}	—	—	100	kHz
Clock low period	t_{LOW}	4.7	—	—	µs
Clock high period	t_{HIGH}	4	—	—	µs
Start hold time	$t_{HD.STA}$	4	—	—	µs
Start setup time	$t_{SU.STA}$	4.7	—	—	µs
Data-in hold time	$t_{HD.DAT}$	0	—	—	µs
Data-in setup time	$t_{SU.DAT}$	250	—	—	ns
Stop setup time	$t_{SU.STO}$	4	—	—	µs
Rise time	t_r	—	—	1	µs
Fall time	t_f	—	—	0.3	µs

Table 6: I2C Timing Specification: Fast Mode

Parameter	Symbol	Minimum	Typical	Maximum	Unit
SCL clock frequency	f_{SCL}	—	—	400	kHz
Clock low period	t_{LOW}	1.3	—	—	µs
Clock high period	t_{HIGH}	0.6	—	—	µs
Bus free to new start	t_{BUF}	1.3	—	—	µs
Start hold time	$t_{HD.STA}$	0.6	—	—	µs
Start setup time	$t_{SU.STA}$	0.6	—	—	µs
Data-in hold time	$t_{HD.DAT}$	0	—	—	µs
Data-in setup time	$t_{SU.DAT}$	100	—	—	ns
Stop setup time	$t_{SU.STO}$	0.6	—	—	µs
Rise time	t_r	—	—	0.3	µs
Fall time	t_f	—	—	0.3	µs
Spike width	t_{SP}	—	—	50	µs

Figure 10: I2C Timing Diagram: Standard and Fast Mode

MEMS
*Make sense of the world*
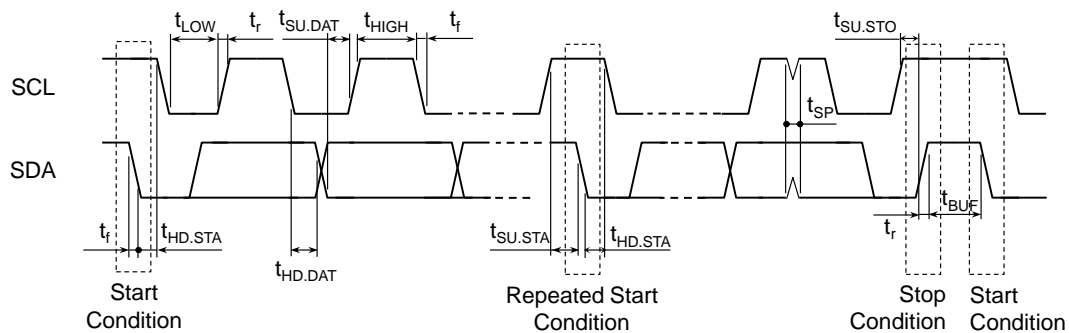
Digital Interface: SPI

SPI Interface General Description

Both 3-wire and 4-wire SPI interfaces are supported. The SPI4W bits of RESET register (00h) control such selection. See 00h register description for more detail.

The SPI transaction starts with the falling edge of CSB and the rising edge of SCK. The first phase of the transfer is the instruction phase of 16 bits, followed by multiple data bytes (every byte consists of 8 bits).

The first instruction phase is shown in the Figure 11. The instruction phase is divided into several bit fields.

Figure 11: SPI instruction phase bit field
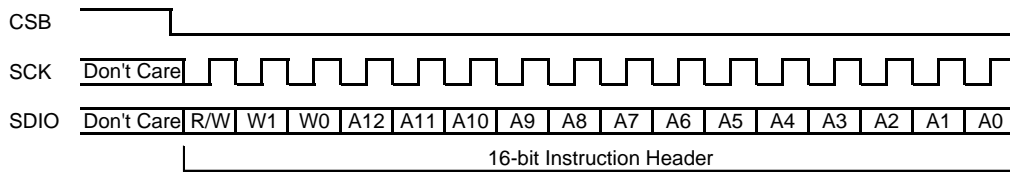
The first bit field is the read/write indicator bit (R/W). When this bit is set, a read operation is requested. On the other hand when this bit is clear, it indicates a write operation.

The second bit field consists of two bits, W1 and W0. They represent the number of data bytes to transfer for either read or write. If the number of bytes to transfer is three or less (W1:W0 = 2'00, 2'b01 or 2'b10), CSB can stall high on byte boundaries. Stalling on a non-byte boundary terminates the communication cycle. If W1:W0 = 2'b11, data can be transferred until CSB transit to high, and CSB is not allowed to stall during the whole streaming process. Table 7 summaries such behaviors for W1:W0 settings.

Table 7: W1/W0 settings

W1:W0	Description	CSB stalling
2'b00	1 bytes of data can be transferred	Optional
2'b01	2 bytes of data can be transferred	Optional
2'b10	3 bytes of data can be transferred	Optional
2'b11	4 or more bytes of data can be transferred. CSB must be held low for the entire process.	No

Data follows the instruction phase. Multiple bytes can be transferred in one transaction determined by the W1:W0 bits. Every byte consists of 8 bits. Figure 12 illustrates the timing for transferring two bytes.

Figure 12: SPI access timing

SPI Specification

Table 8: SPI Timing Specification

Parameter	Symbol	Minimum	Maximum	Unit
SCK clock frequency	f_{SCK}	—	10	MHz
SCK clock low pulse	t_{SCKL}	20	—	ns
SCK clock high pulse	t_{SCKH}	20	—	ns
SDI setup time	t_{SDI_setup}	20	—	ns
SDI hold time	t_{SDI_hold}	20	—	ns
SDO/SDI output delay	t_{SDO_OD}	—	30 (25pF) 40 (250pF)	ns
CSB setup time	t_{CSB_setup}	20	—	ns
CSB hold time	t_{CSB_hold}	40	—	ns

Figure 13: SPI Timing Diagram
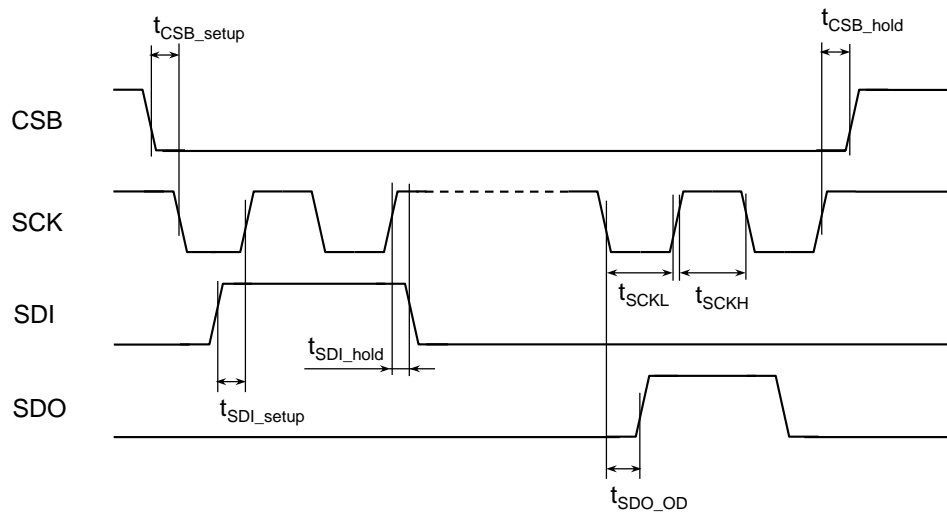
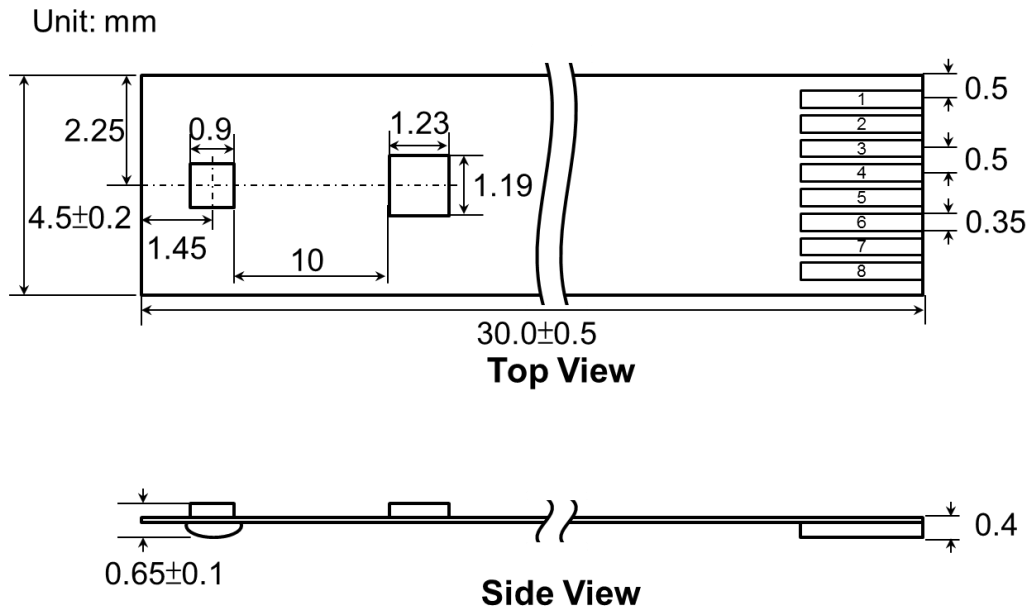**Package**

Outline Dimension

Figure 14: Package Outline Dimension

RoHS Compliance

GMEMS FPC packaged sensors are compliant with Restrictions on Hazardous Substances (RoHS) and having lead-free terminations. Reflow profiles applicable to those processes can be used successfully for soldering the devices.

Moisture Sensitivity Level

GMFPC101 package MSL rating is Level 3.