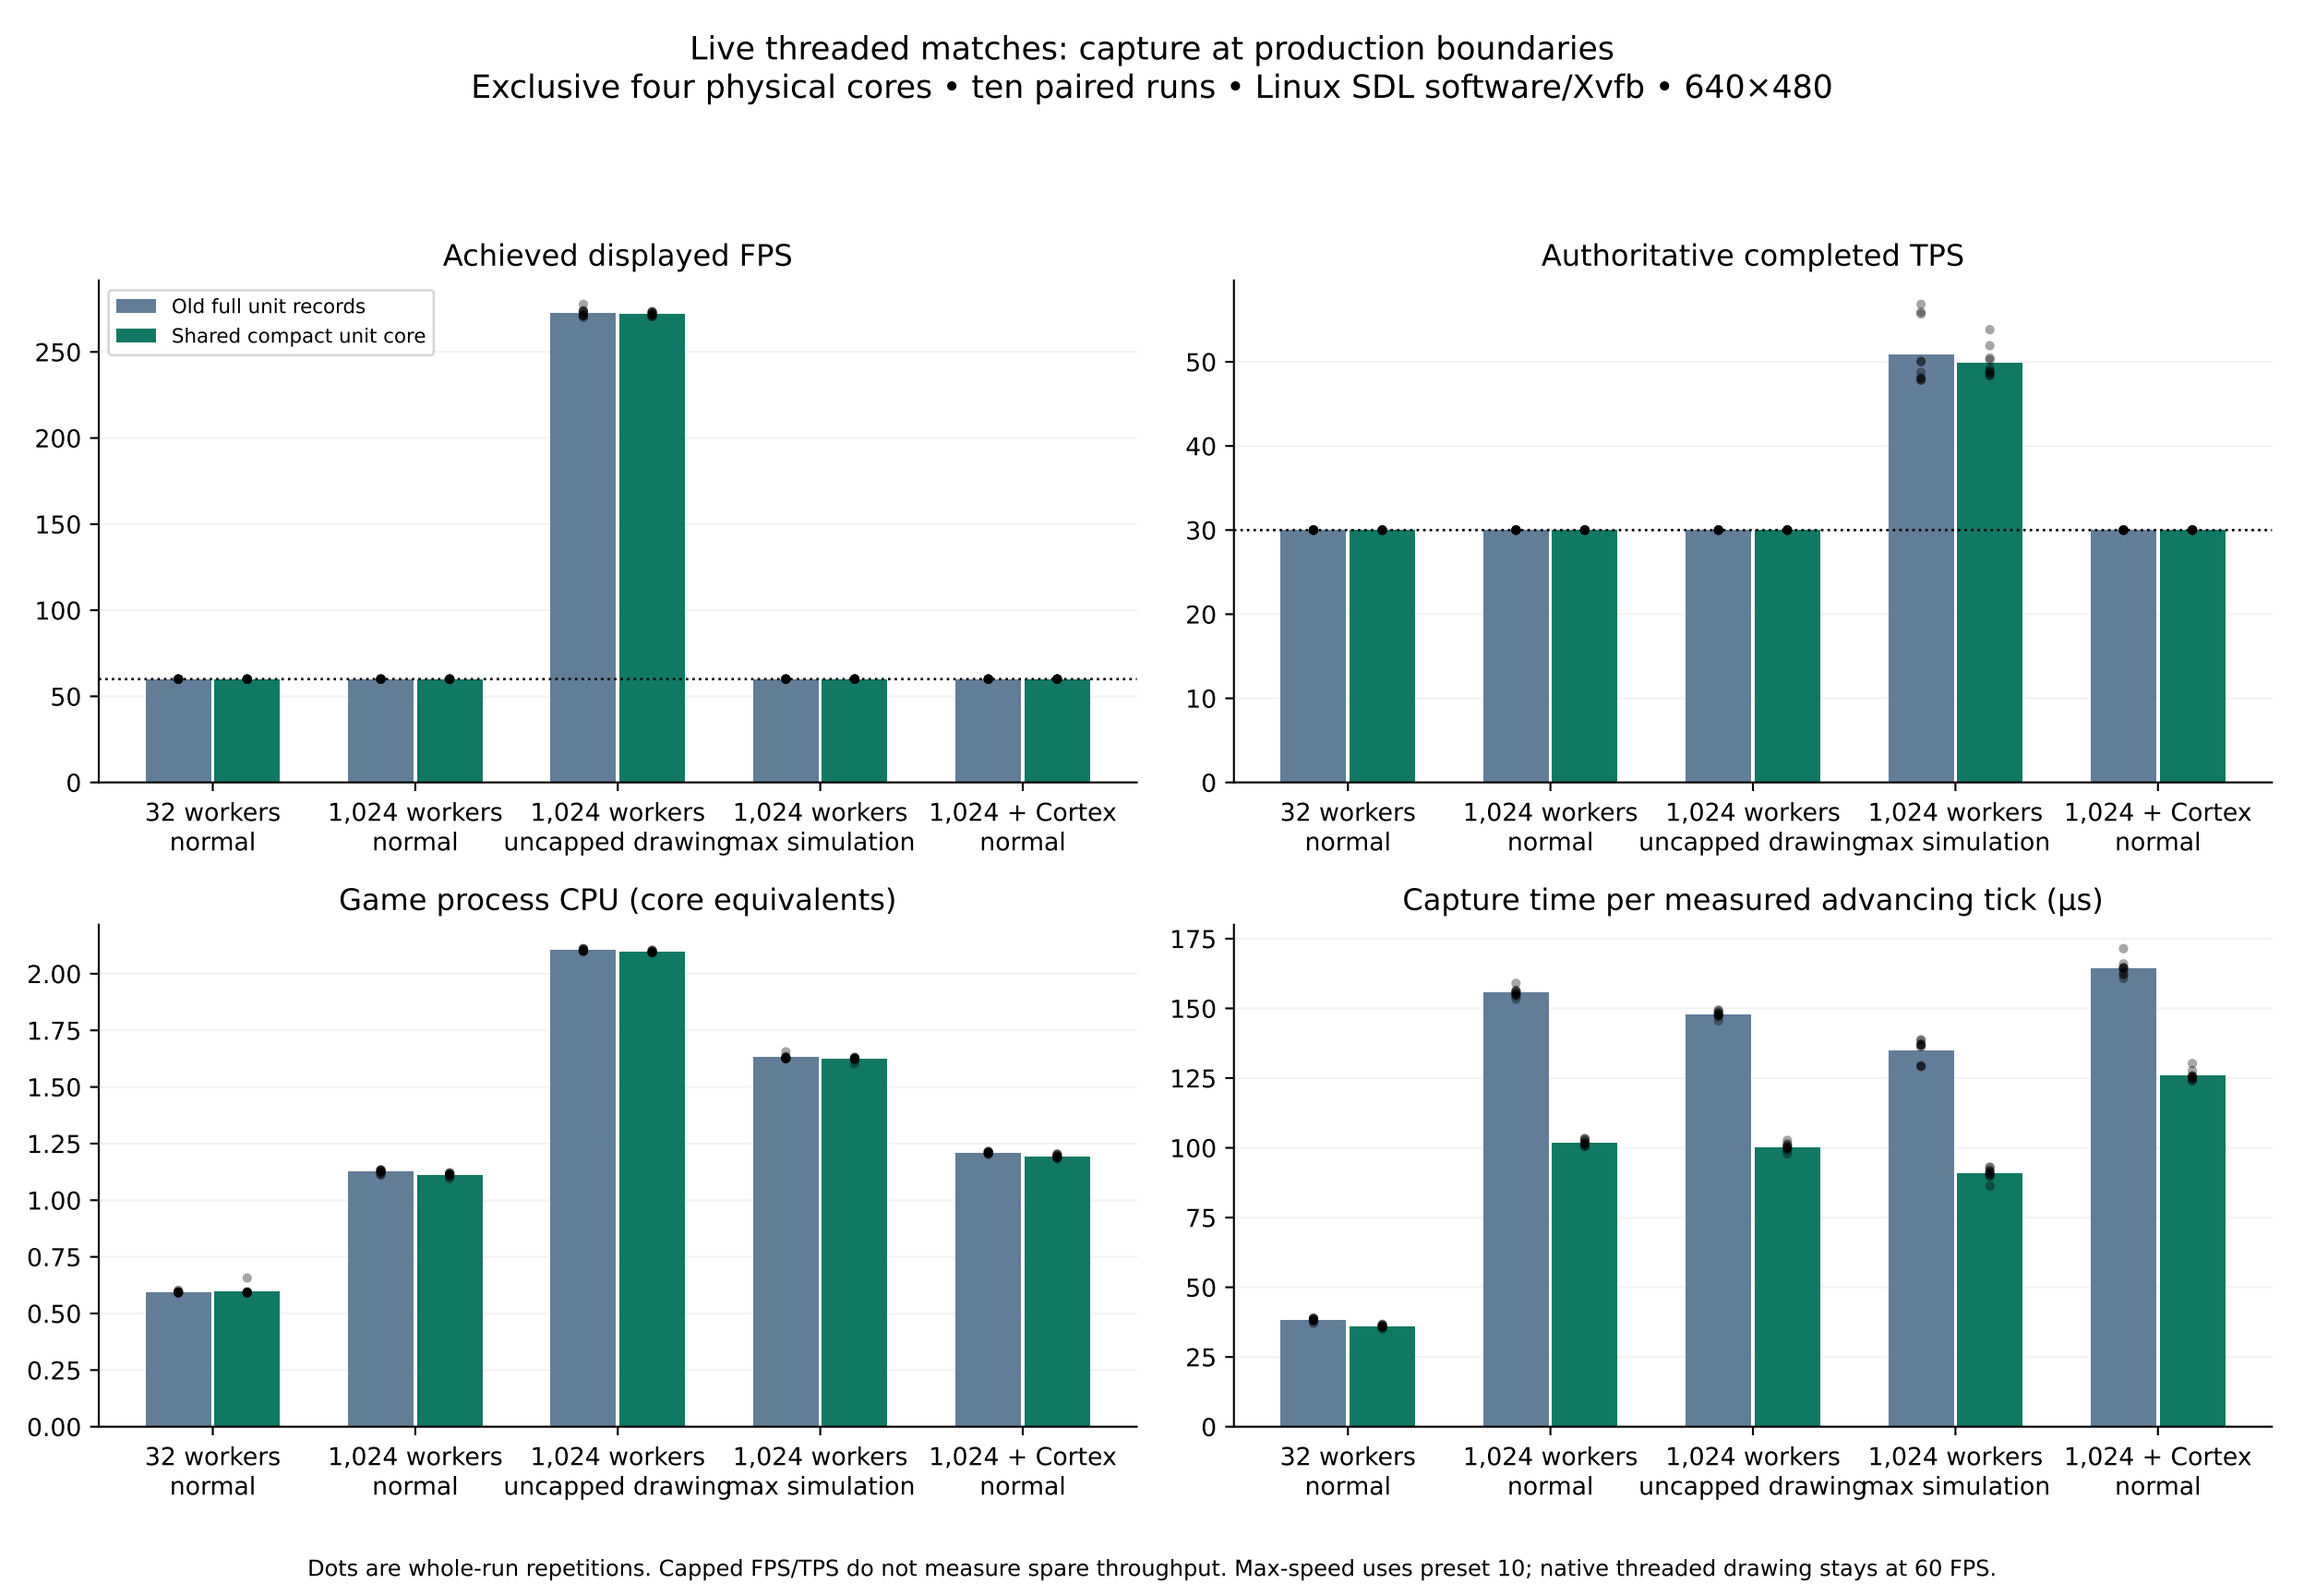
Live threaded matches: capture at production boundaries
Exclusive four physical cores • ten paired runs • Linux SDL software/Xvfb • 640×480
Achieved displayed FPS
Old full unit records
Shared compact unit core
0
50
100
150
200
250
32 workers normal
1,024 workers normal
1,024 workers uncapped drawing
1,024 workers max simulation
1,024 + Cortex normal
Authoritative completed TPS
0
10
20
30
40
50
32 workers normal
1,024 workers normal
1,024 workers uncapped drawing
1,024 workers max simulation
1,024 + Cortex normal
Game process CPU (core equivalents)
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
32 workers normal
1,024 workers normal
1,024 workers uncapped drawing
1,024 workers max simulation
1,024 + Cortex normal
Capture time per measured advancing tick (µs)
0
25
50
75
100
125
150
175
32 workers normal
1,024 workers normal
1,024 workers uncapped drawing
1,024 workers max simulation
1,024 + Cortex normal
Dots are whole-run repetitions. Capped FPS/TPS do not measure spare throughput. Max-speed uses preset 10; native threaded drawing stays at 60 FPS.