



Glory Rail
www.gloryrail.com

Glory Diamond Industry Co.,Ltd

International Building, No. 127 Zidong Road,
Guancheng District, Zhengzhou City,
Henan Province, China

Email: info@glorysteelwork.com
https://www.gloryrail.com

Edition


Date

Scale

Rev.B

2019/10/20

1:1.25 @A4

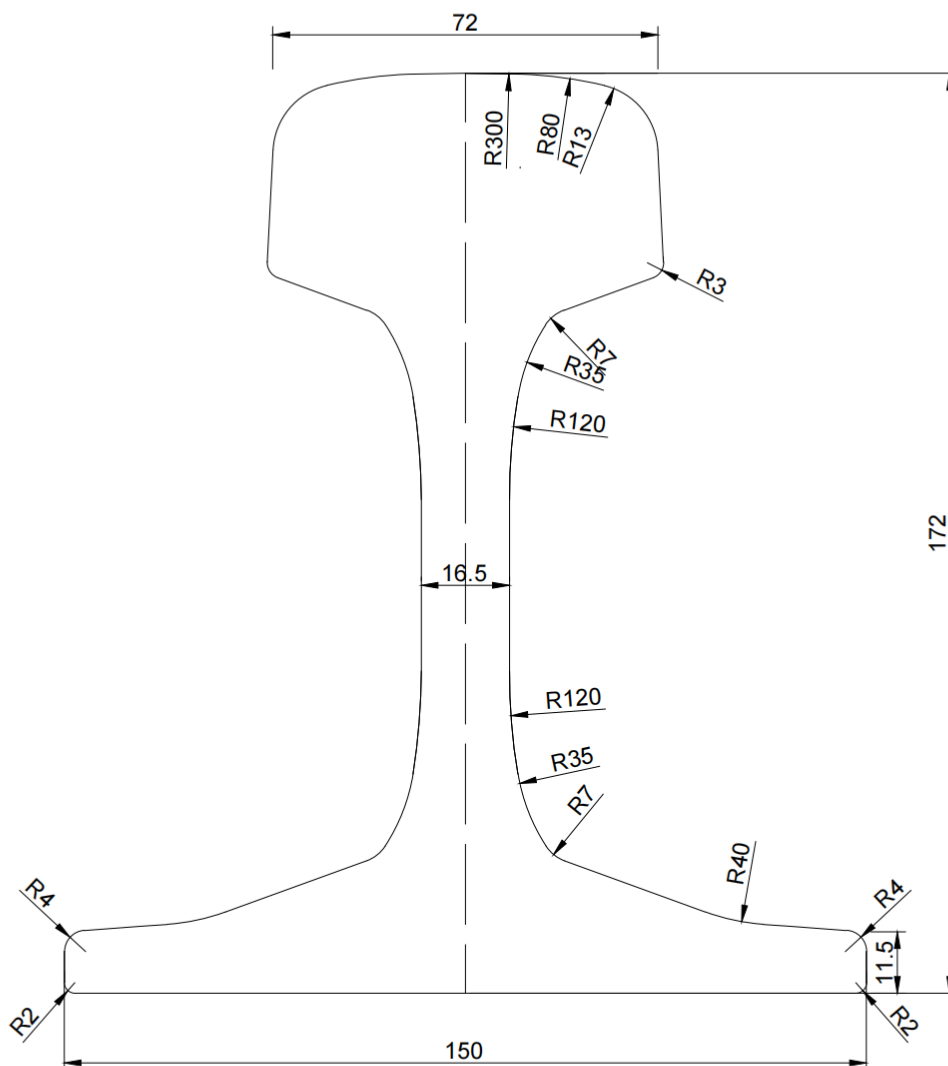

DRAWING NOTICE:

THIS CAD DRAWING, PROPRIETARY TO GLORY RAIL, IS PREPARED IN ACCORDANCE WITH APPLICABLE RAIL STANDARDS AND PROVIDED FOR ILLUSTRATION ONLY. FOR DETAILED DIMENSIONS OR TECHNICAL SOURCE FILES TO SUPPORT YOUR DESIGN, PLEASE CONTACT GLORY RAIL.

Materials: R350HT

Chemical composition(%)

C:0.72-0.80
Si:0.15-0.58
Mn:0.70-1.20
S:≤0.025
P:≤0.025

Mechanical property

Tensile strength: ≥1175 MPa
Elongation: ≥9%
Hardness HB: 350-390

Rail Designation

60E1 (UIC60)

Rail Origin

CHINA

Standard

EN13674-1

Area of section

3038.3 mm²

Calculated Mass

60.21kg/m

Neutral Axis to base

80.92 mm