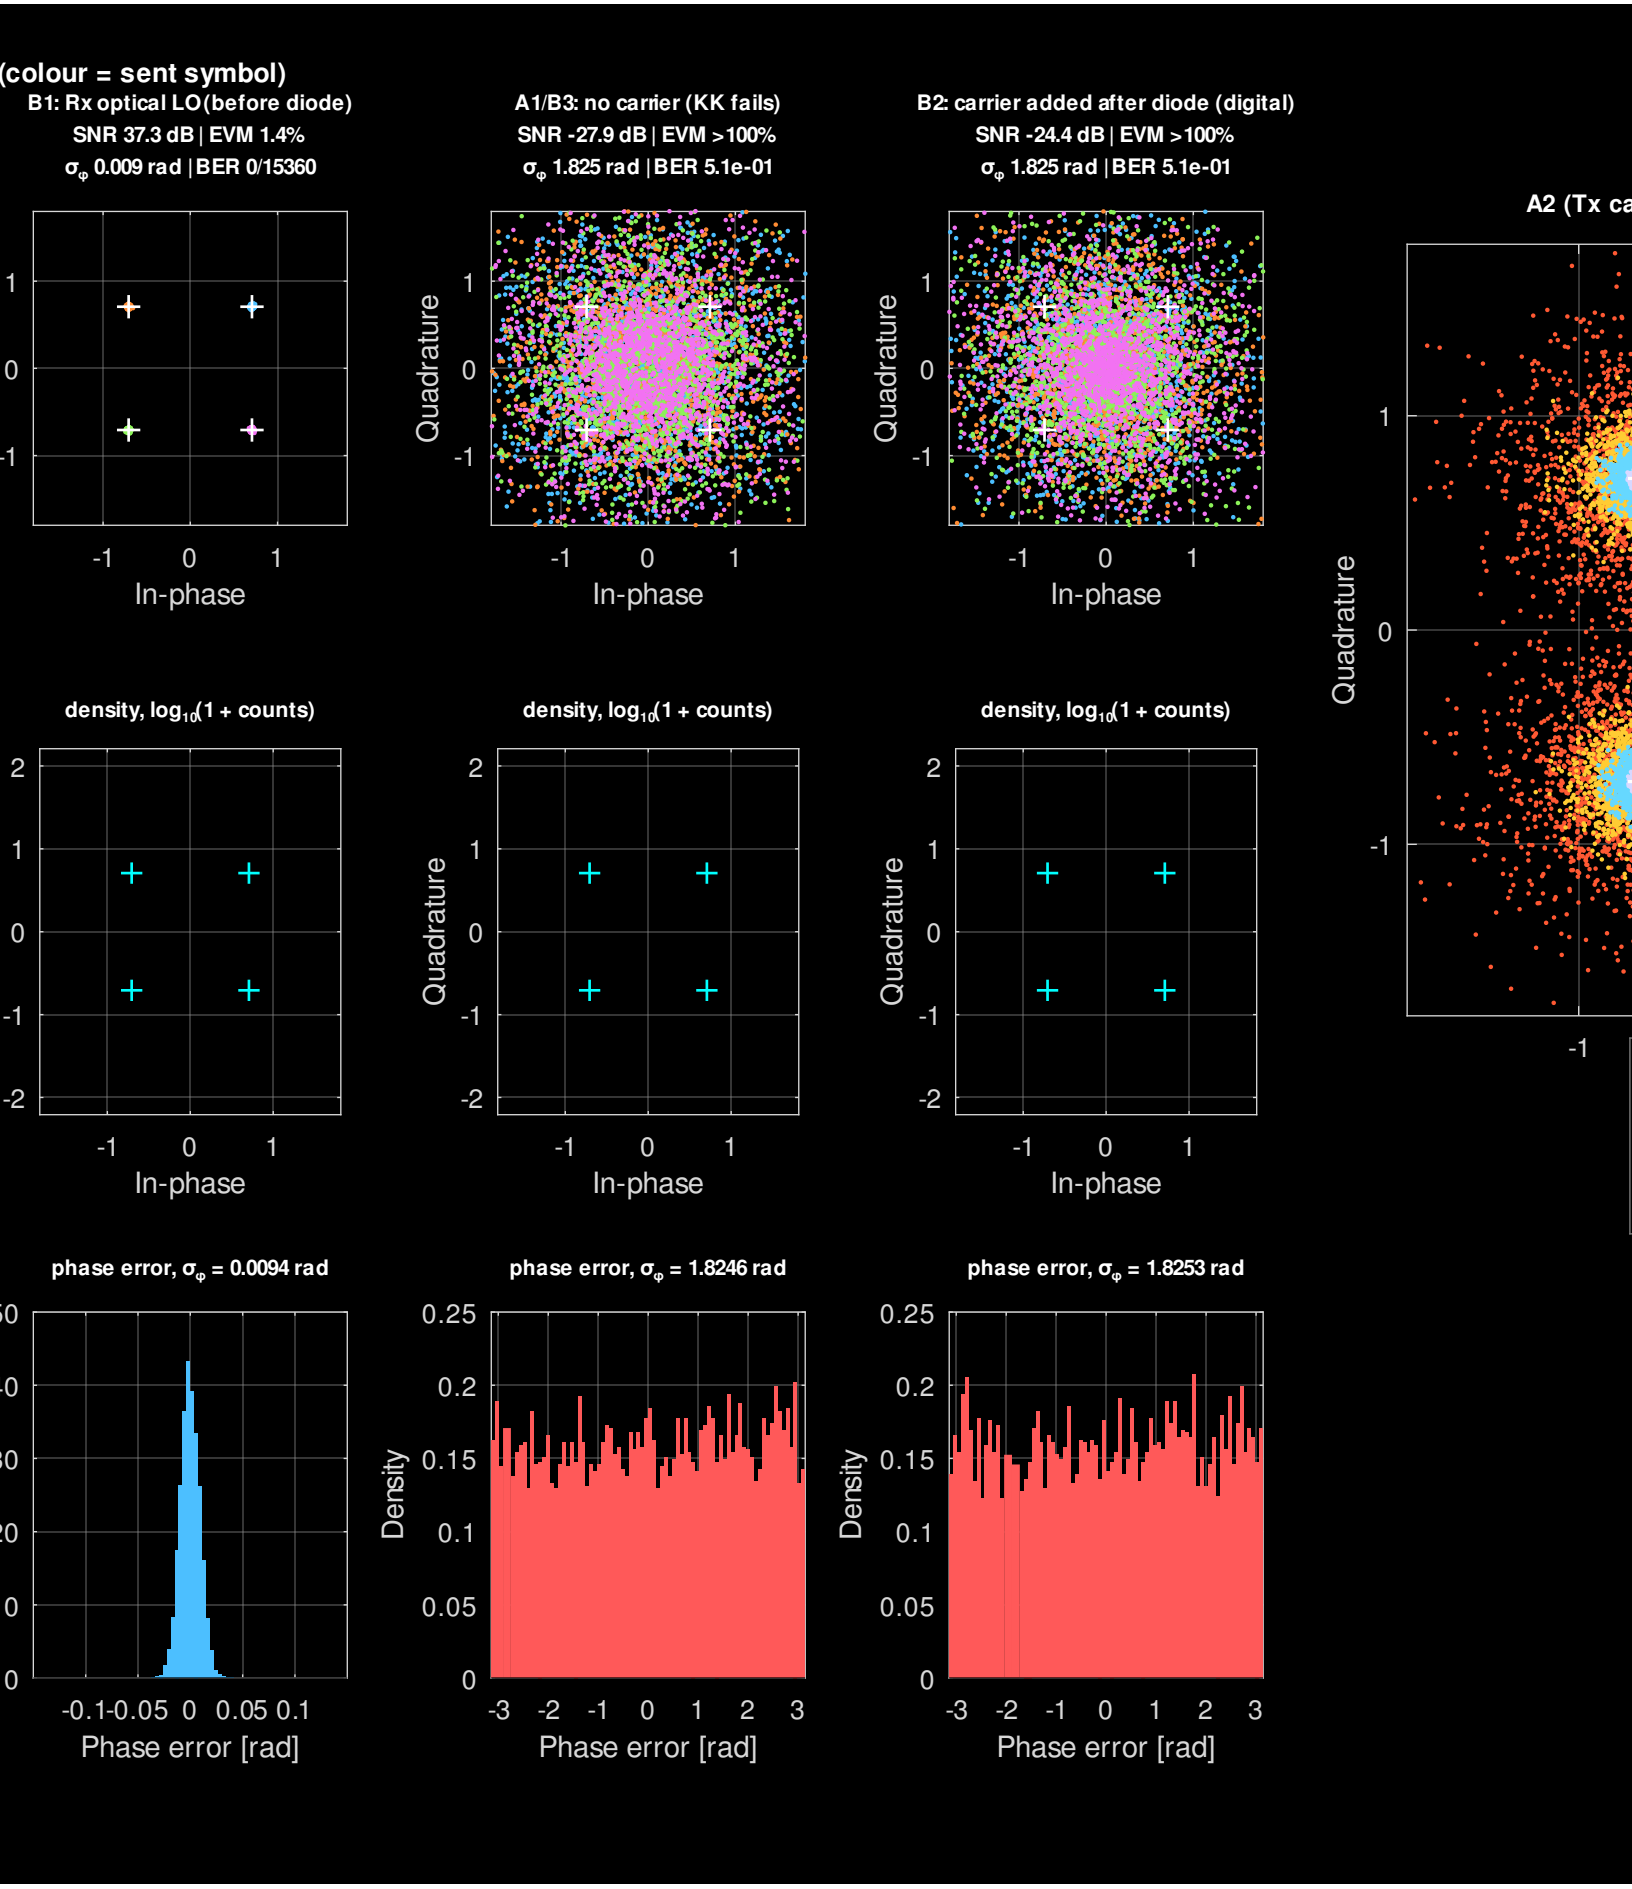

(colour = sent symbol)
B1: Rx optical LO(before diode)
SNR 37.3 dB | EVM 1.4%
σφ 0.009 rad | BER 0/15360
A1/B3: no carrier (KK fails)
SNR -27.9 dB | EVM >100%
σφ 1.825 rad | BER 5.1e-01
B2: carrier added after diode (digital)
SNR -24.4 dB | EVM >100%
σφ 1.825 rad | BER 5.1e-01
A2 (Tx ca
Quadrature
In-phase
density, log10(1 + counts)
phase error, σφ = 0.0094 rad
phase error, σφ = 1.8246 rad
phase error, σφ = 1.8253 rad
Density
Phase error [rad]