


GnieSat CanSat 2024/2025 Main PCB

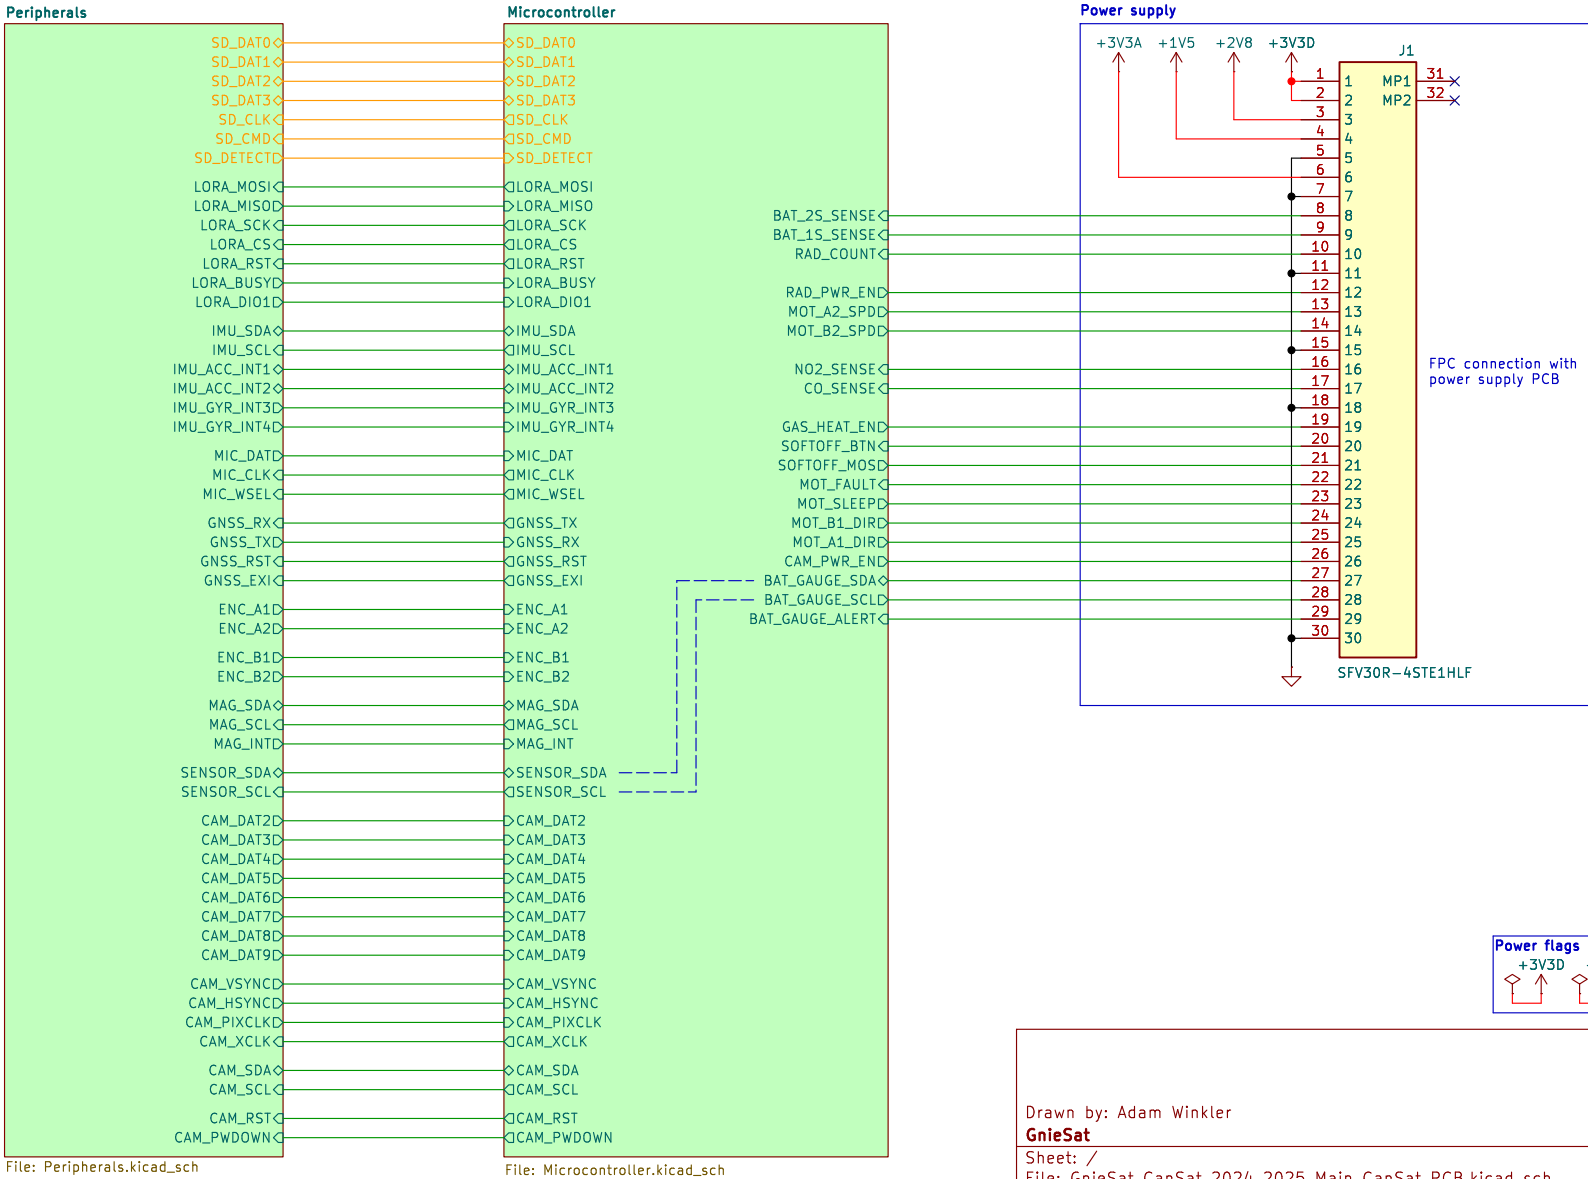

File: Peripherals.kicad_sch

File: Microcontroller.kicad_sch

Drawn by: Adam Winkler

GnieSat

Sheet: /

File: GnieSat_CanSat_2024_2025_Main_CanSat_PCB.kicad_sch

Title: GnieSat CanSat 2024/2025 Main PCB




Size: A4

Date: 2025-02-24

Rev: 1.0

KiCad E.D.A. 8.0.8








Id: 1/3

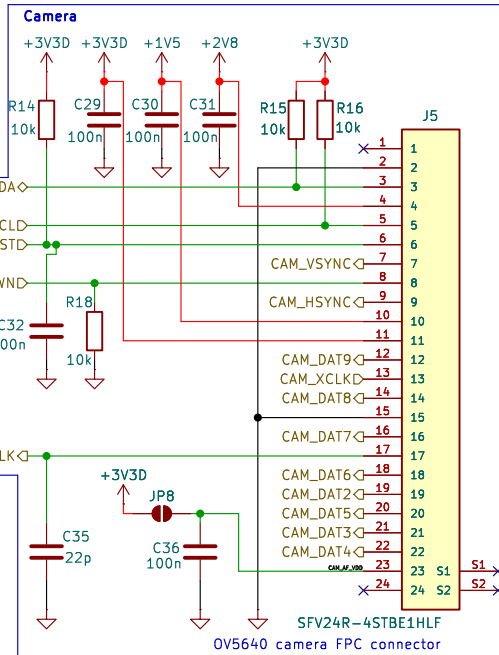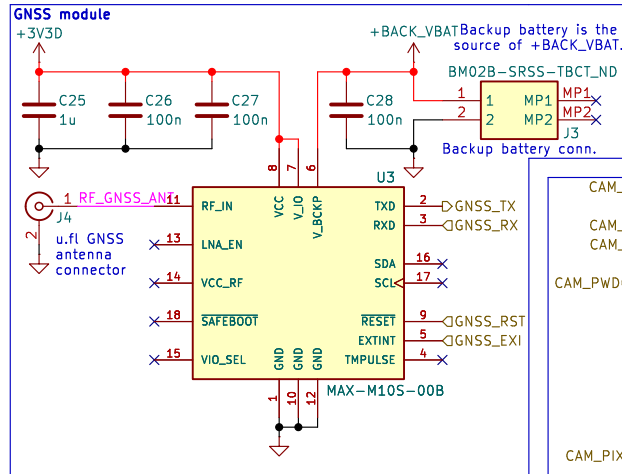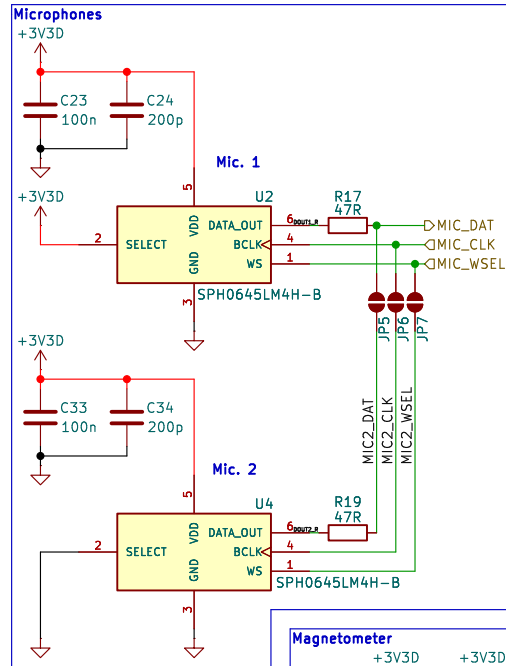

CanSat peripherals

Jumper legend

- JP5, JP6, JP7: Disconnect second microphone from I2S lines in case of problems.
- JP8: Connect/disconnect CAM_AF_VDD from +3V3D. CAM_AF_VDD provides power to AF motor.
- JP9: BME280 I2C address select. 1-2 (GND): 0x76; 2-3 (+3V3D): 0x77. DO NOT CONNECT ALL OF THEM!
- JP10: Accel. I2C address select. 1-2 (GND): 0x18; 2-3 (+3V3D): 0x19. DO NOT CONNECT ALL OF THEM!
- JP11: Gyro. I2C address select. 1-2 (GND): 0x68; 2-3 (+3V3D): 0x69. DO NOT CONNECT ALL OF THEM!
- JP12: Connect/disconnect LORA_TXEN from LORA_DIO2. LORA_DIO2 can control LORA_TXEN after proper setup.

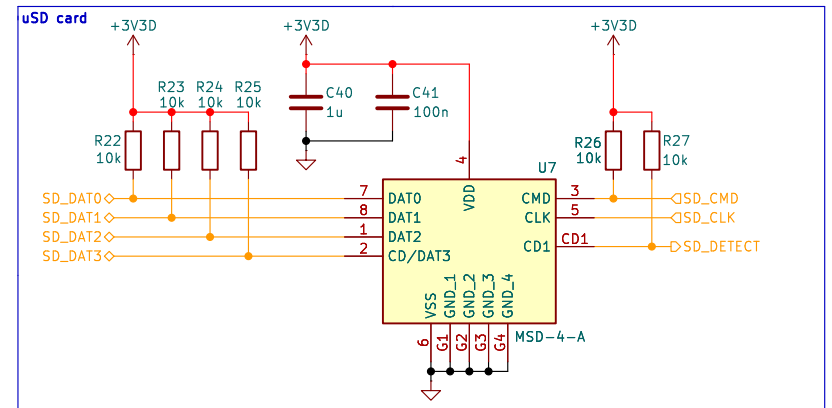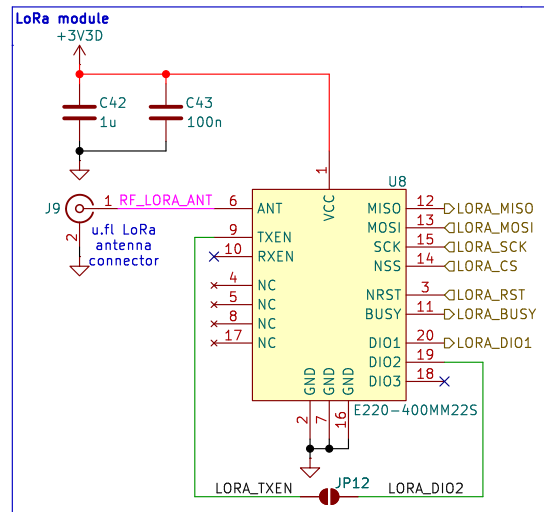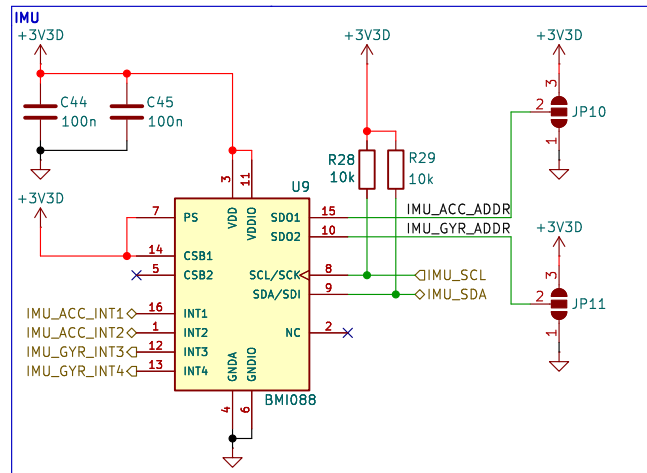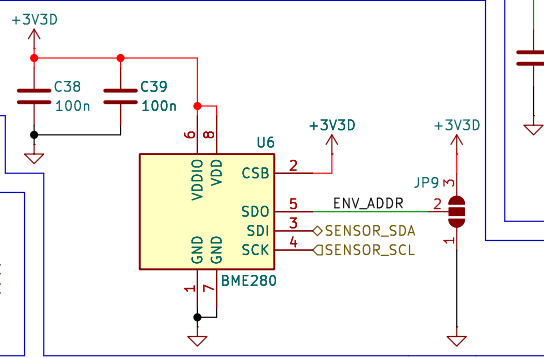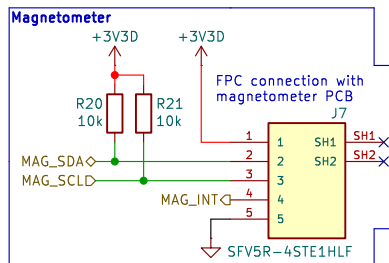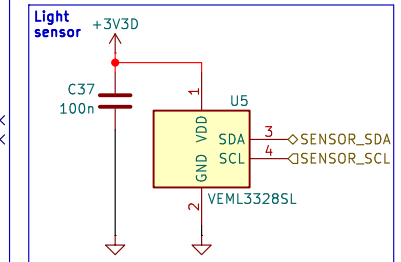

Drawn by: Adam Winkler

GnieSat

Sheet: /Peripherals/

File: Peripherals.kicad_sch

Title: GnieSat CanSat 2024/2025 Main PCB

Size: A4 Date: 2025-02-24

KiCad E.D.A. 8.0.8

Rev: 1.0

Id: 3/3