(a) Remote ZZ measurement

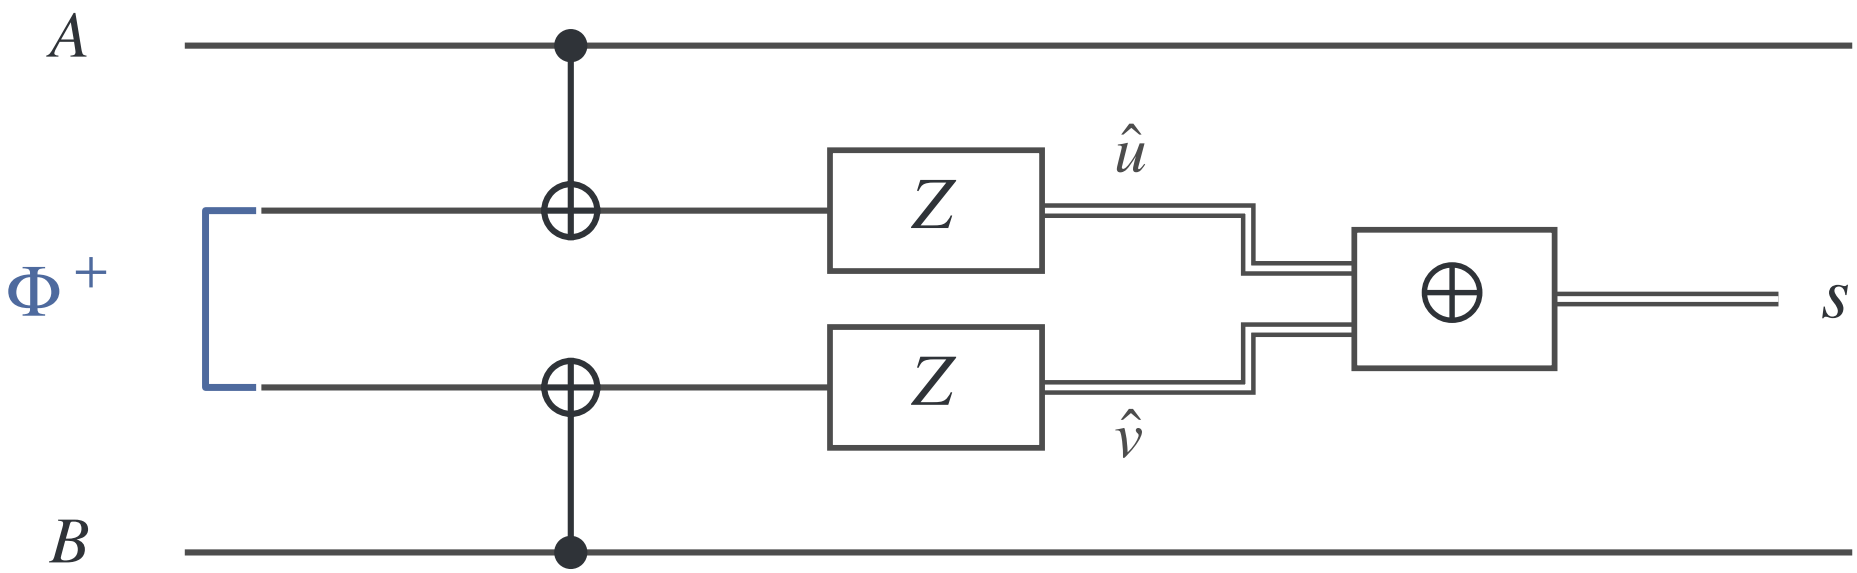

Protected readout
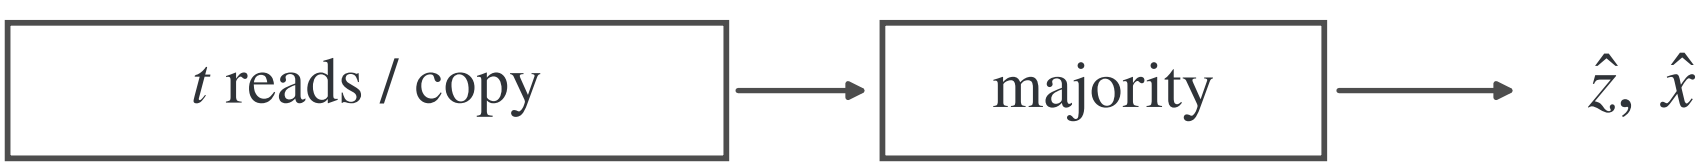
(b) Protecting both records