

1. Description


1.1. Project

Project Name	IR
Board Name	No information
Generated with:	STM32CubeMX 4.25.0
Date	04/02/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103CBTx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

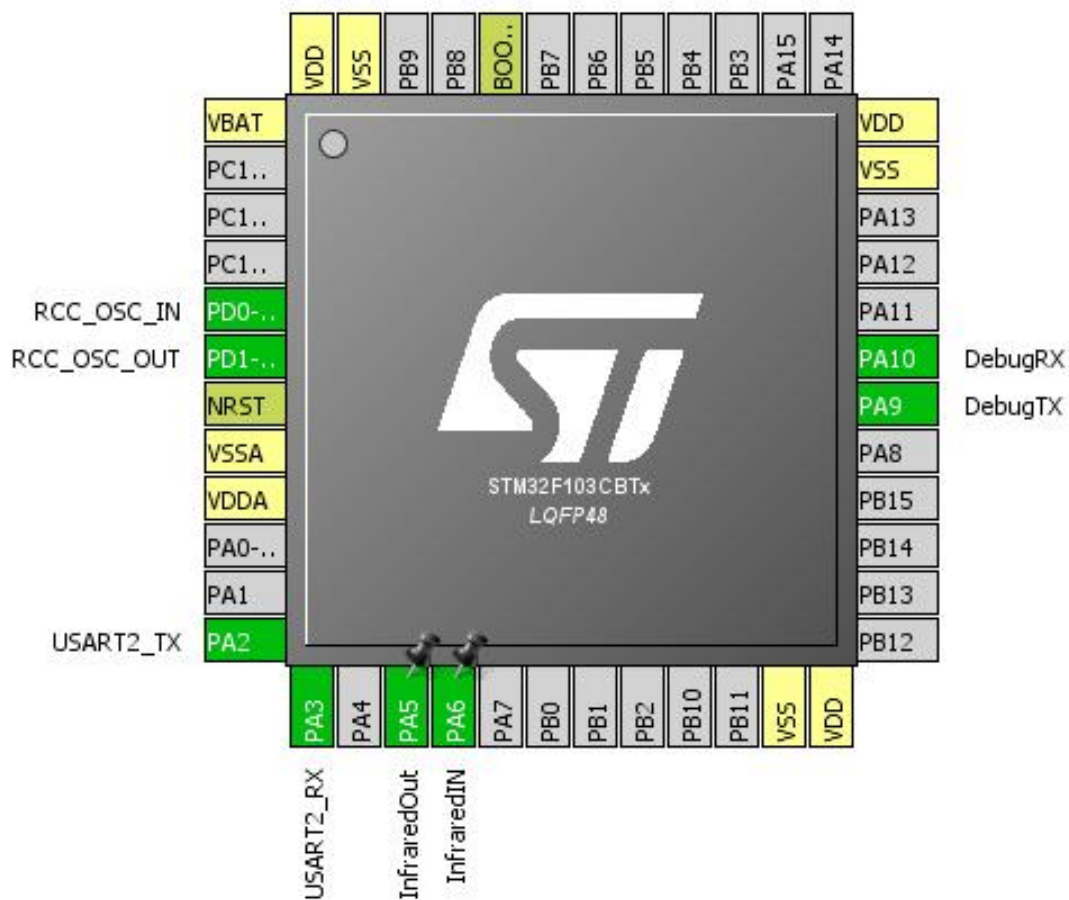


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
15	PA5 *	I/O	GPIO_Output	InfraredOut
16	PA6 *	I/O	GPIO_Input	InfraredIN
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	USART1_TX	DebugTX
31	PA10	I/O	USART1_RX	DebugRX
35	VSS	Power		
36	VDD	Power		
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

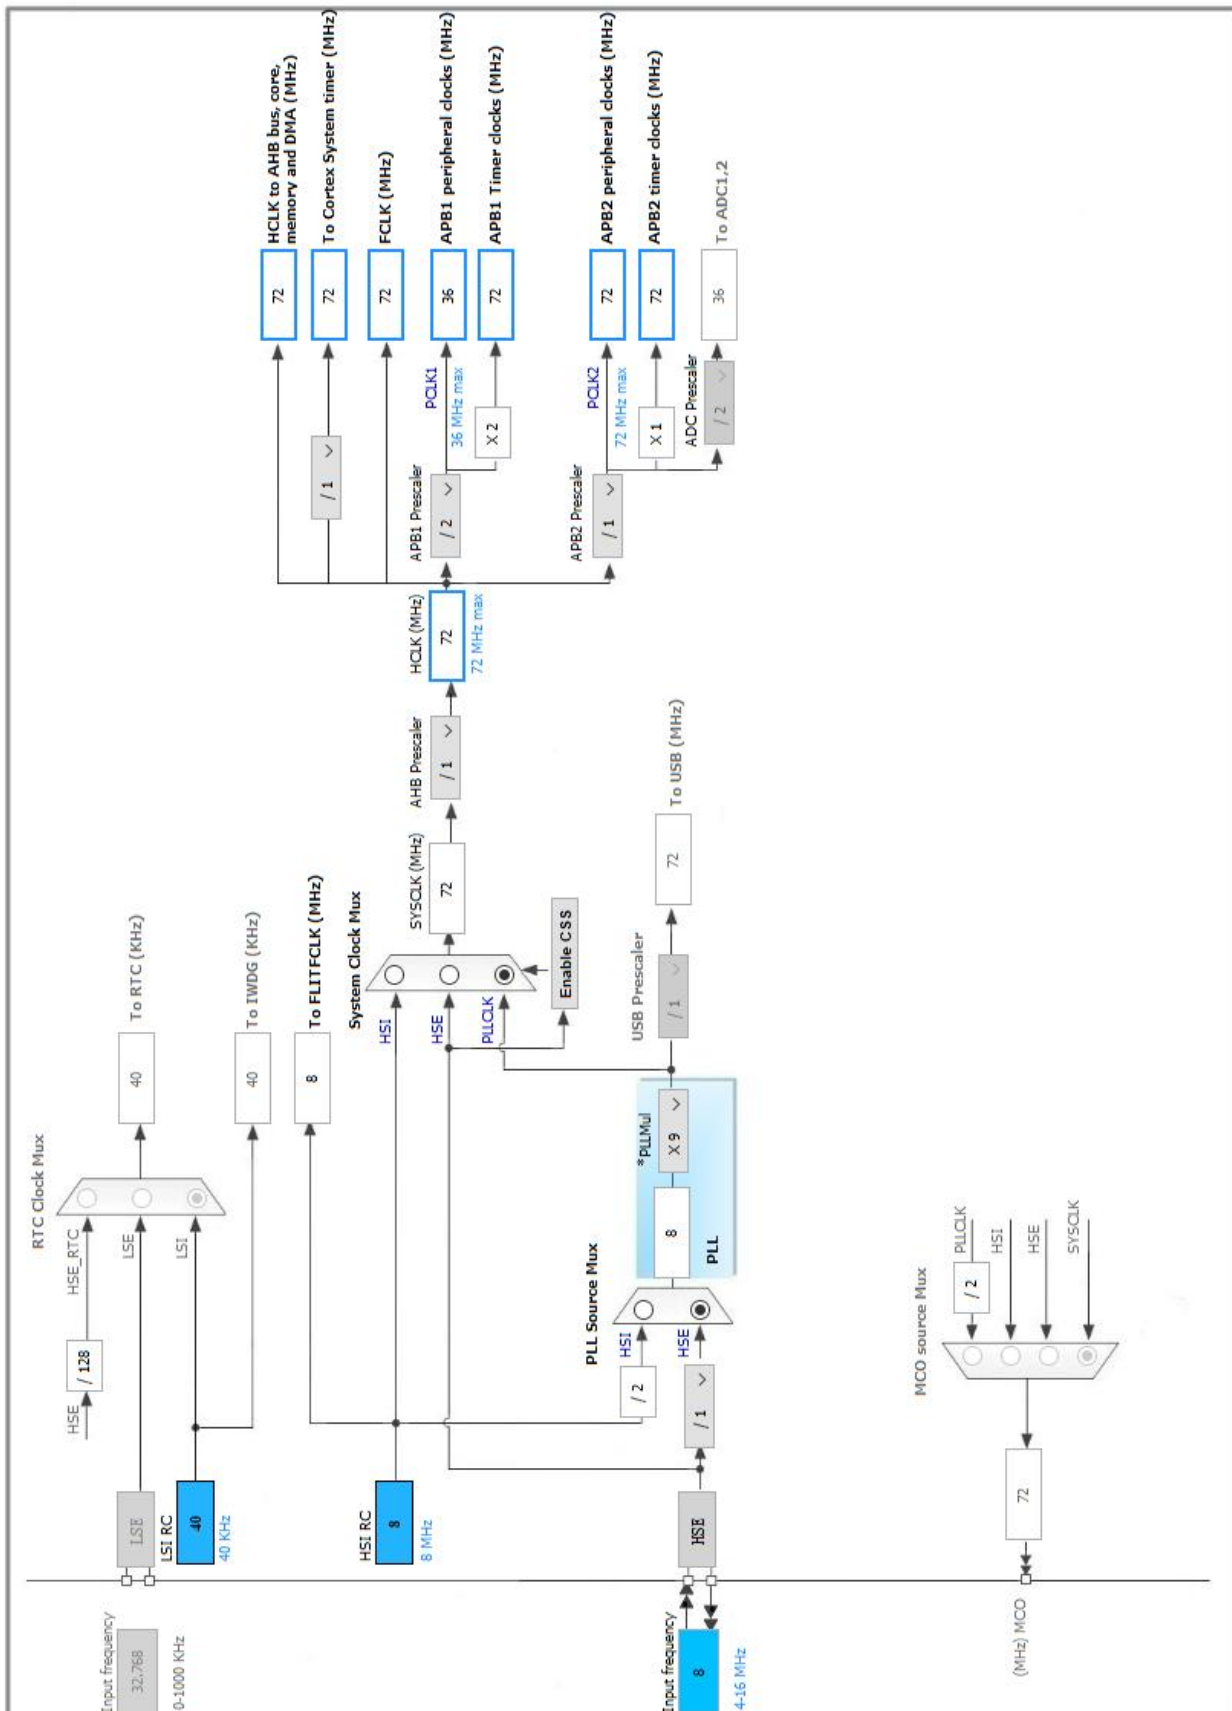

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.2. SYS

Debug: No Debug

Timebase Source: SysTick

5.3. USART1

Mode: Asynchronous

5.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.5. FREERTOS

mode: Enabled

5.5.1. Config parameters:

Versions:

FreeRTOS version	9.0.0
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled

USE_PORT_OPTIMISED_TASK_SELECTION	Enabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

Memory Allocation	Dynamic
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.5.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled

uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	DebugTX
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	DebugRX
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	High *	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PA5	GPIO_Output	Output Push Pull	n/a	Low	InfraredOut
	PA6	GPIO_Input	Input mode	Pull-up *	n/a	InfraredIN

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART2_RX	DMA1_Channel6	Peripheral To Memory	Low
USART2_TX	DMA1_Channel7	Memory To Peripheral	Low
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low

USART2_RX: DMA1_Channel6 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

USART2_TX: DMA1_Channel7 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

USART1_TX: DMA1_Channel4 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 channel4 global interrupt	true	5	0
DMA1 channel5 global interrupt	true	5	0
DMA1 channel6 global interrupt	true	5	0
DMA1 channel7 global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		
USART2 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103CBTx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Pack Report