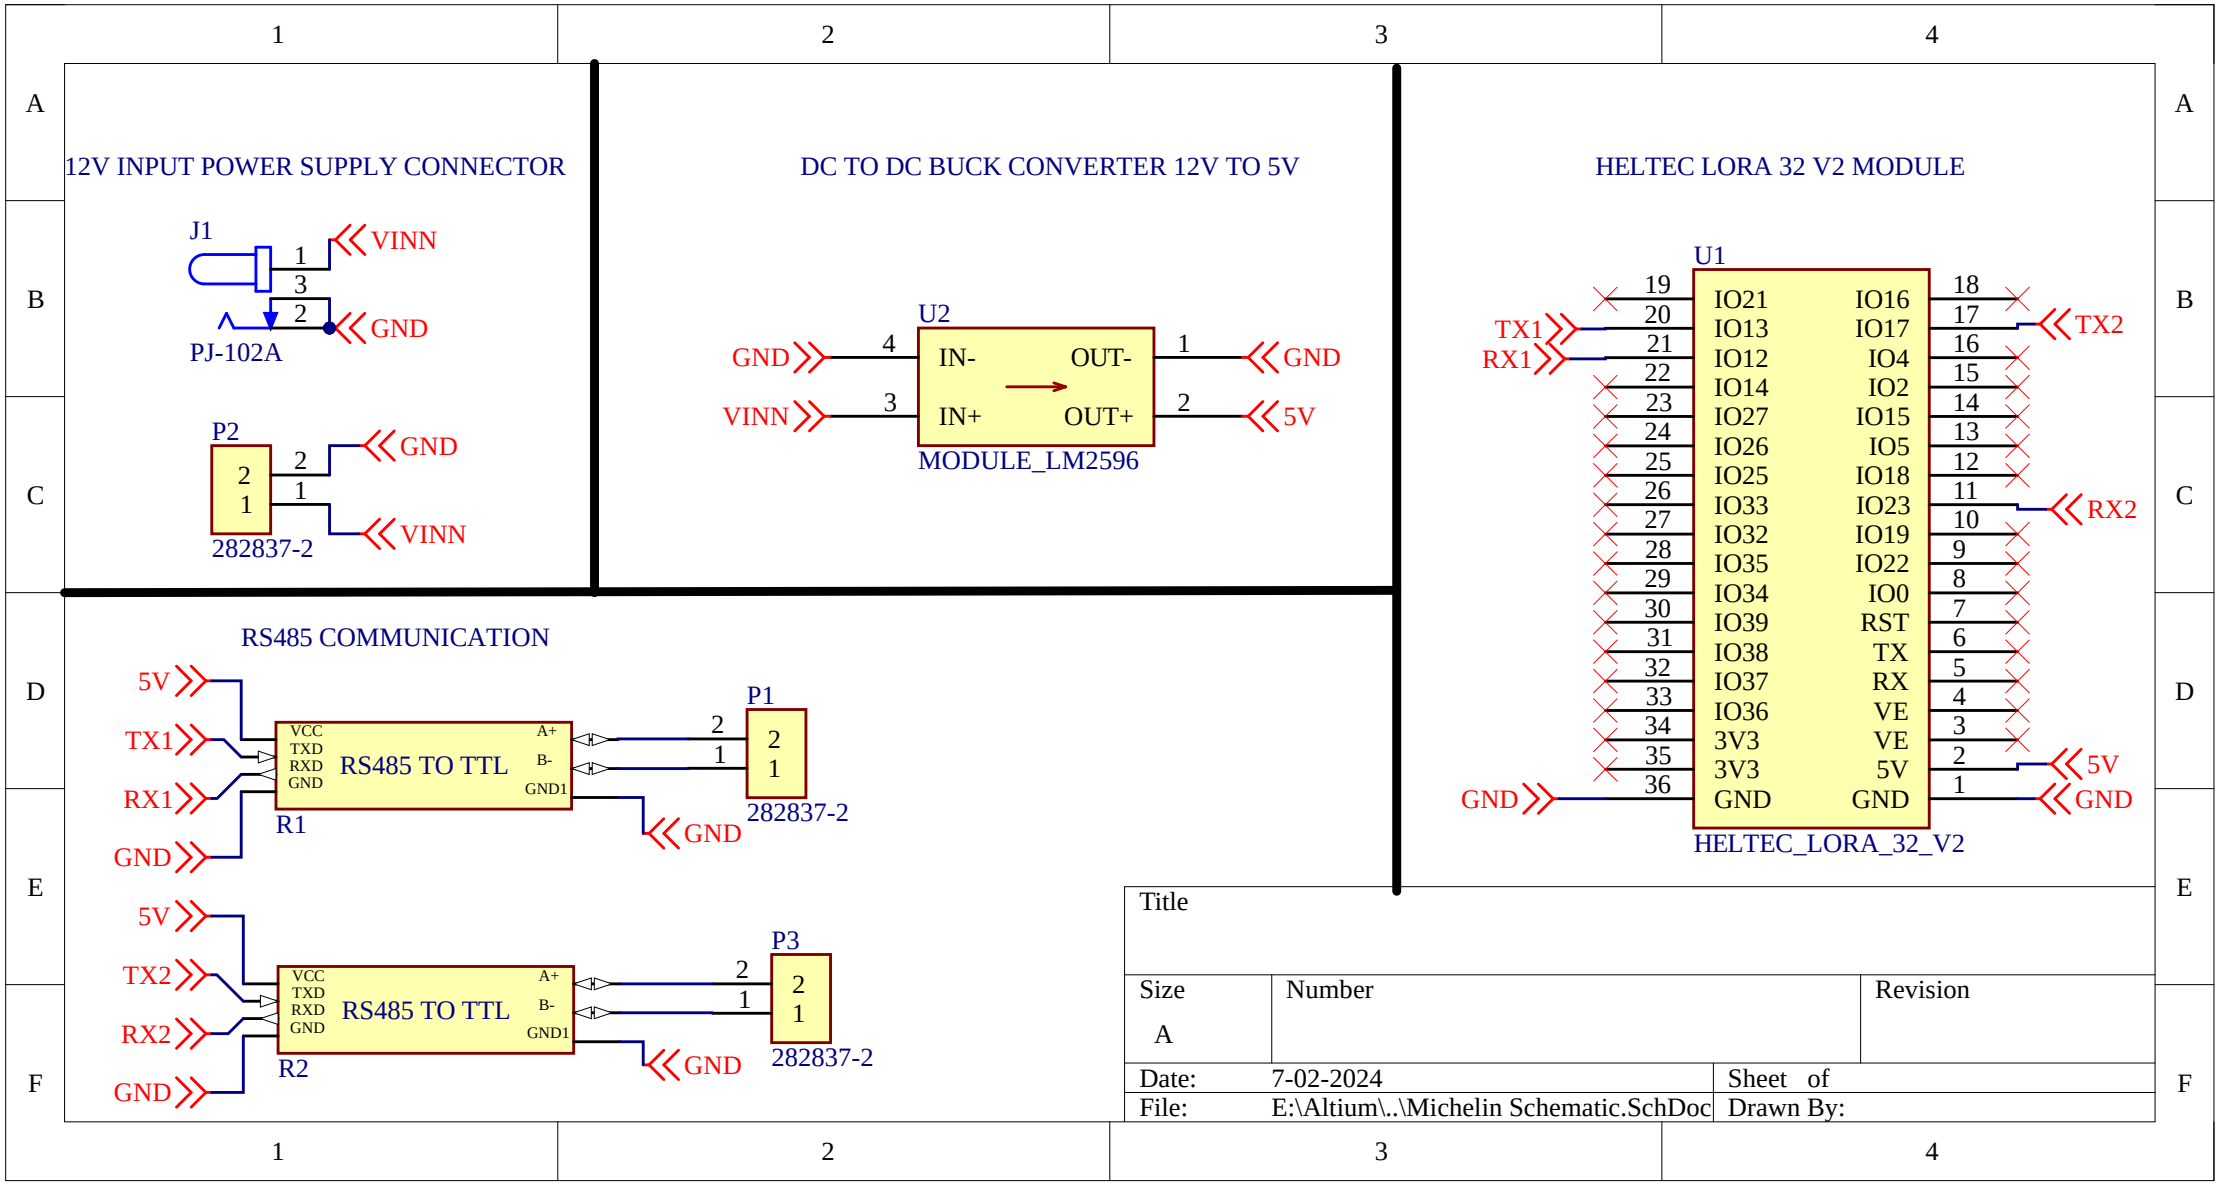
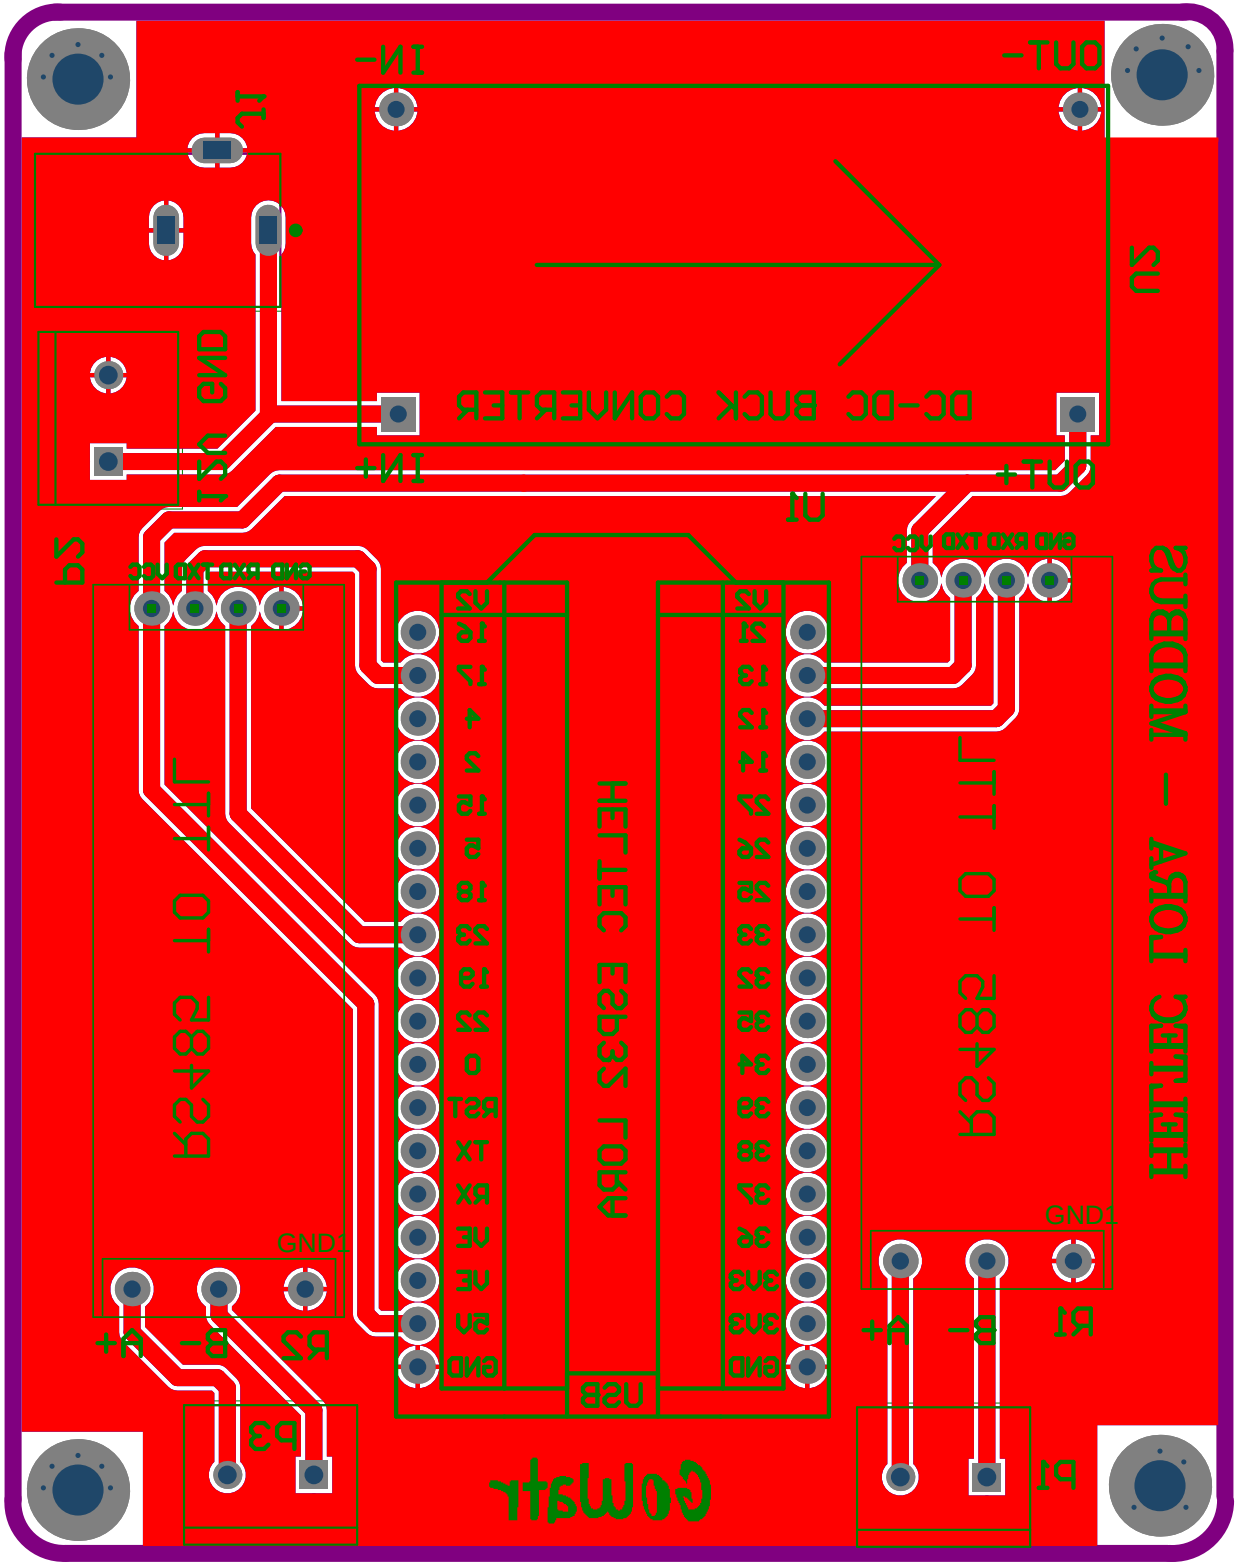

12V INPUT POWER SUPPLY CONNECTOR
J1
VINN
GND
PJ-102A
P2
GND
VINN
282837-2
DC TO DC BUCK CONVERTER 12V TO 5V
U2
GND
VINN
IN-
IN+
OUT-
OUT+
GND
5V
MODULE_LM2596
HELTEC LORA 32 V2 MODULE
U1
TX1
RX1
TX2
RX2
5V
GND
IO21
IO13
IO12
IO14
IO27
IO26
IO25
IO33
IO32
IO35
IO34
IO39
IO38
IO37
IO36
3V3
3V3
GND
IO16
IO17
IO4
IO2
IO15
IO5
IO18
IO23
IO19
IO22
IO0
RST
TX
RX
VE
VE
5V
GND
HELTEC_LORA_32_V2
RS485 COMMUNICATION
5V
TX1
RX1
GND
VCC
TXD
RXD
GND
RS485 TO TTL
A+
B-
GND1
R1
P1
282837-2
5V
TX2
RX2
GND
R2
P3
282837-2
Title
Size
A
Number
Revision
Date:
7-02-2024
Sheet of
File:
E:\Altium\..\Michelin Schematic.SchDoc
Drawn By:


IN-
OUT-
J1
DC-DC BUCK CONVERTER
J2
GND
IN+
OUT+
U1
P2
GND RXD TXD VCC
GND RXD TXD VCC
HELTEC ESP32 LORA
USB
JTT TO RS485
JTT TO RS485
MODBUS - LORA HELTEC
GND1
GND1
A+
B-
P3
P1
P1
GoWatr

| Line # | Name | Description | Designator | Quantity | Manufacturer 1 | Manufacturer Part Number 1 | Manufacturer Lifecycle 1 | Supplier 1 | Supplier Part Number 1 | Supplier Unit Price 1 | Supplier Subtotal 1 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2 | PJ-102A | 2.0 x 6.5 mm, 2.5 A, Horizontal, Through Hole, Tapered Pins, Dc Power Jack Connector | J1 | 1 | | | | | | | |
| | 282837-2 | 5mm 2Pin Screw Type PCB Terminal Blocks | P1, P2, P3 | 3 | | | | | | | |
| 4 | RS485 TO TTL | | R1, R2 | 2 | | | | | | | |
| 5 | HELTEC_LORA_32_V2 | Heltec Lora 32 V2, 36 Pins. | U1 | 1 | | | | | | | |
| 6 | MODULE_LM2596 | MODULE BUCK STEP DOWN 5A 44x21mm | U2 | 1 | | | | | | | |