Ferrari

PASSION FOR LIFTING

TRUCK MOUNTED CRANES

Ferrari

350
Ferrari

Ferrari 553
Ferrari 553
Ferrari 553

CLASSIC LINE

300
Compact telescopic
Page 6 to page 13

500
Small articulated
Page 14 to page 21

5000
Small articulated
Page 22 to page 31

700
Articulated with double linkage
Page 76 to page 89

900
Endless slewing with double linkage
Page 116 to page 119

NEW AGE

7000
Articulated with double linkage
Page 32 to page 75

9000C
Endless slewing with double linkage
Page 110 to page 121

7000D
Telescopic boom
Page 126 to page 129

6000
Medium articulated No CE
Page 90 to page 99

8
Basic articulated NO CE
Page 100 to page 109

FBR
Heavy duty articulated
Page 130 to page 137

Trave
Trave articulated
Page 138 to page 143

Stiff boom
Heavy duty
Page 144 to page 152

FFB
Light palmoil articuled
Page 152 to page 177

SKY
Self-Aligning basket
Page 178 to page 161

Features & Accessories

Ferrari
330

300 Series

Compact telescopic

310
314
315
321
322
329
330
350

310

315

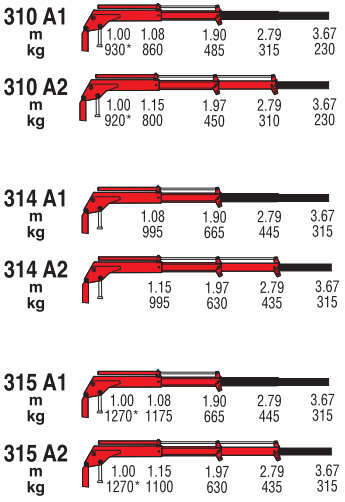

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
310 A1	0,93	328	180	17,5	5	3,01	145	595x1240x370
310 A2	-	328	180	17,5	5	3,85	175	647x1240x370
314 A1	1,27	335	160	17,5	8	2,98	174	620x1241x430
314 A2	-	335	160	17,5	8	3,8	193	672x1241x430
315 A1	1,27	335	160	17,5	8	2,98	174	620x1241x430
315 A2	-	335	160	17,5	8	3,8	199	672x1241x430

322

300

RADIOCONTROL

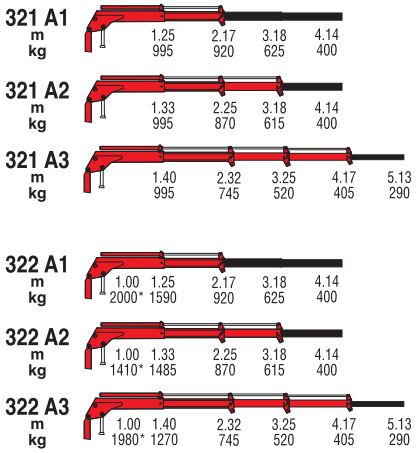

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
321 A1	2	335	160	17,5	8	3,57	216	695x1521x430
321 A2	-	335	160	17,5	8	4,51	240	710x1521x430
321 A3	-	335	150	17,5	8	5,45	262	868x1521x430
322 A1	2	335	160	17,5	8	3,56	216	695x1521x430
322 A2	-	335	160	17,5	8	4,51	243	710x1521x430
322 A3	-	335	150	17,5	8	5,45	265	868x1521x430

350

300

RADIOCONTROL

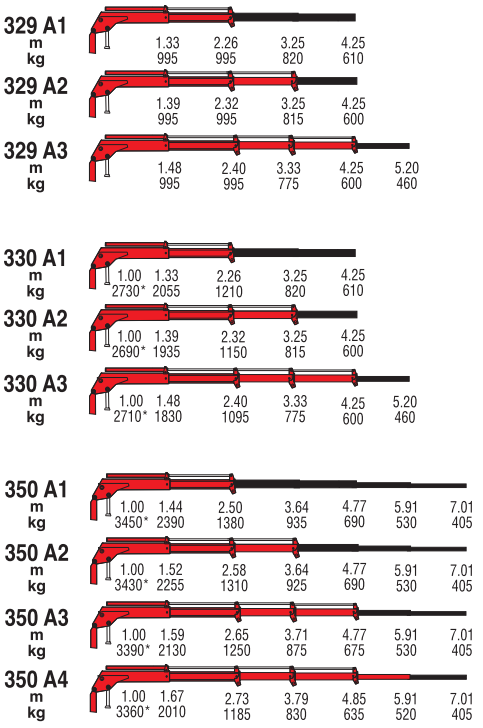

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
329 A1	2,75	335	160	17,5	8	3,59	263	910x1521x440
329 A2	-	335	160	17,5	8	4,49	295	980x1521x440
329 A3	-	335	160	17,5	8	5,39	321	980x1521x440
330 A1	2,73	335	160	17,5	10	3,58	263	730x1587x440
330 A2	-	335	160	17,5	10	4,49	298	753x1587x440
330 A3	-	335	160	17,5	10	5,39	323	753x1587x440
350 A1	3,45	395	175	17,5	10	3,94	305	976x1702x490
350 A2	-	395	175	17,5	10	4,98	339	1040x1702x490
350 A3	-	395	175	17,5	10	6,01	371	1040x1702x490
350 A4	-	395	175	17,5	10	7,04	399	1040x1702x490

841 Ferrari
The Center's 50th Anniversary

571 Ferrari

500 Serie

Small articulated

531
538
543
553
563
583

531

531R

RADIOCONTROL

A1

m	1.00	1.90	3.15	4.50	5.95	7.40
kg	2590*	1330**	820	575	420	310

A2

m	1.00	1.90	3.25	4.60	5.95	7.40
kg	2490*	1280**	765	530	405	310

A3

m	1.00	1.90	3.35	4.70	6.00	7.35	8.75
kg	2410*	1230**	720	495	370	300	220

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	2,59	370	175	25	8	6,98	450	1860x1590x490
A2	-	370	175	25	8	8,32	485	1920x1590x490
A3	-	370	175	25	8	9,66	515	2000x1590x490

538

538R

RADIOCONTROL

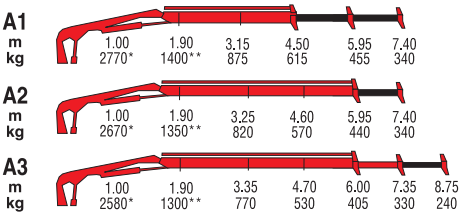

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	2,77	370	185	25	8	6,98	450	1860x1590x490
A2	-	370	185	25	8	8,32	485	1920x1590x490
A3	-	370	185	25	8	9,66	515	2000x1590x490

543

543R

RADIOCONTROL

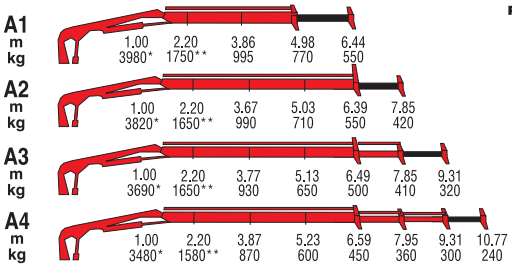

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	3,98	380	235	35	16	7,82	710	2165x1845x560
A2	-	380	235	35	16	9,26	760	2165x1845x560
A3	-	380	235	35	16	10,65	810	2165x1845x560
A4	-	380	235	35	16	12,06	855	2165x1845x560

Ferrari PASSION FOR LIFTING

553

553R

RADIOCONTROL

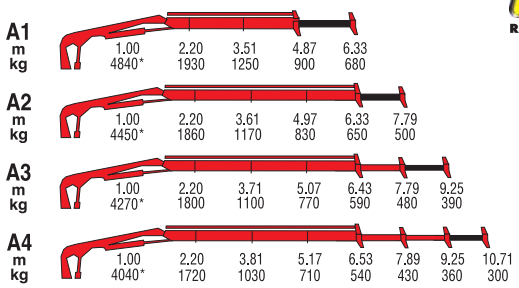

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	4,84	380	265	35	16	7,82	730	2165x1845x560
A2	-	380	265	35	16	9,23	780	2165x1845x560
A3	-	380	265	35	16	10,65	830	2165x1845x560
A4	-	380	265	35	16	12,06	875	2165x1845x560

563

563R

RADIOCONTROL

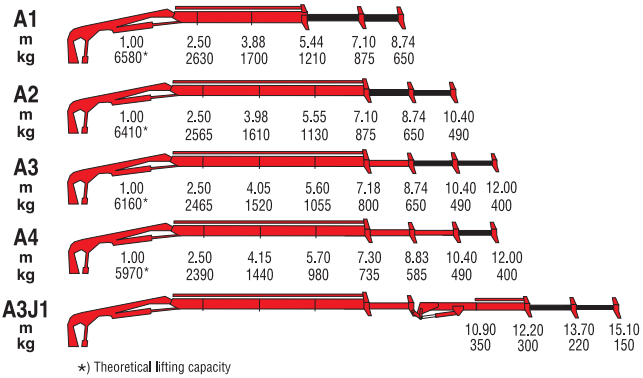

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	6,58	387	245	35	20	8,34	900	2020x1980x600
A2	-	387	245	35	20	9,81	970	2100x1980x600
A3	-	387	245	35	20	11,34	1030	2220x1980x600
A4	-	387	245	35	20	12,90	1080	2250x1980x600
A3J1	-	387	245	35	20	14,68	1210	2256x1980x725

Ferrari PASSION FOR LIFTING

583

583R

RADIOCONTROL

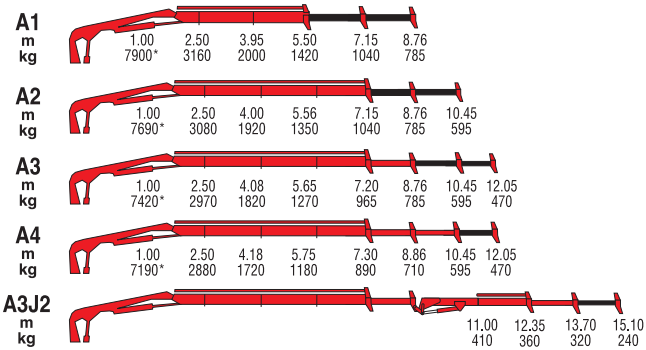

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	7,9	387	285	35	20	8,50	950	2080x1980x600
A2	-	387	285	35	20	10,20	1030	2155x1980x600
A3	-	387	285	35	20	11,70	1090	2275x1980x600
A4	-	387	285	35	20	13,30	1150	2300x1980x600
A3J2	-	387	285	35	20	16,60	1300	2310x1980x730

HV107

5000 Serie

Small articulated

5027
5047
5077
5107
5147
5197
5227

5027

RADIOCONTROL



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	2,60	370	205	17,5	10	7,93	375	1900x1635x352
A3	-	370	205	17,5	10	9,19	405	1900x1635x352

Ferrari PASSION FOR LIFTING

5047

RADIOCONTROL



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	4,30	380	270	48	14	7,22	565	2155x1955x420
A2	-	380	270	48	14	8,51	615	2155x1955x420
A3	-	380	270	48	14	9,81	660	2155x1955x420

5077

RADIOCONTROL

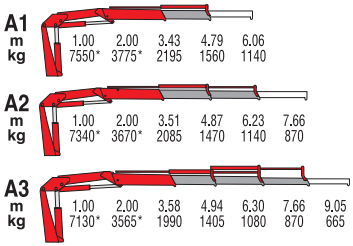

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	7,55	380	255	48	16	7,81	770	2320x2030x565
A2	-	380	255	48	16	9,22	830	2320x2030x565
A3	-	380	255	48	16	10,64	890	2320x2030x565

5107

RADIOCONTROL

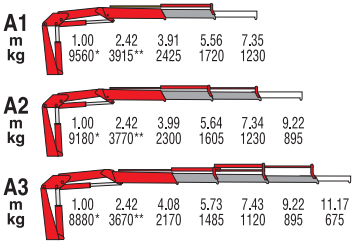

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	9,56	380	275	100	25	9,30	1030	2490x2320x635
A2	-	380	275	100	25	11,08	1130	2490x2320x635
A3	-	380	275	100	25	12,95	1220	2490x2320x690

5147

RADIOCONTROL

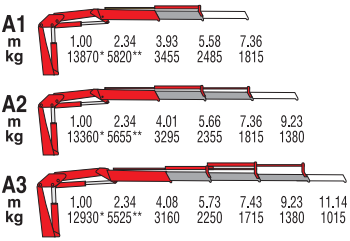

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	13,9	380	285	100	25	9,54	1375	2500x2455x820
A2	-	380	285	100	25	11,3	1490	2500x2455x820
A3	-	380	285	100	25	13,1	1595	2500x2455x820

5197

RADIOCONTROL

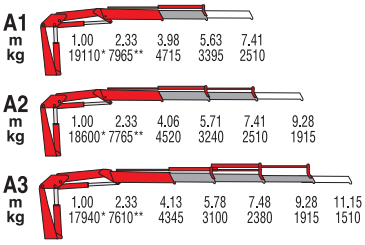

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	19,1	380	295	150	40	9,35	1715	2500x2475x920
A2	-	380	295	150	40	11,0	1850	2500x2475x920
A3	-	380	295	150	40	12,8	1975	2500x2475x920

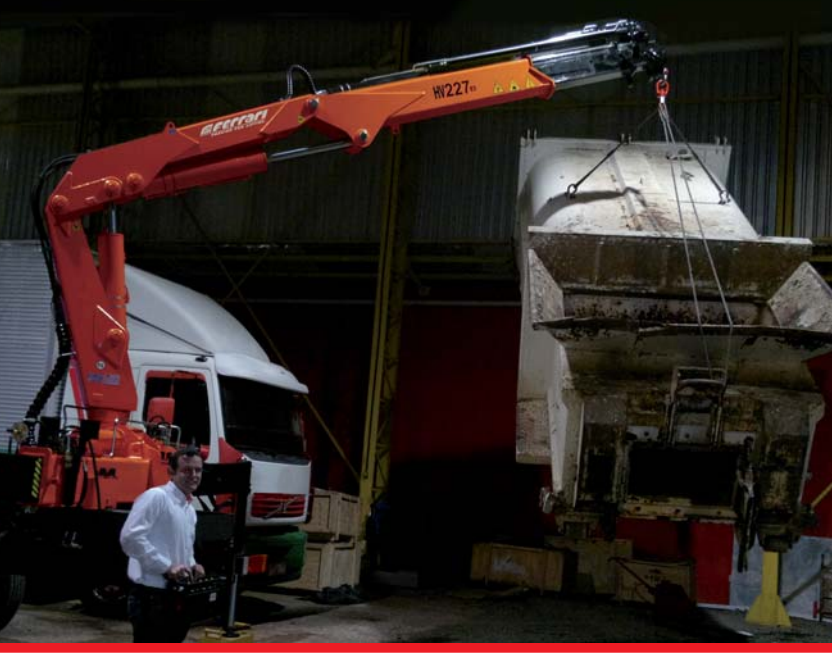

5227

RADIOCONTROL

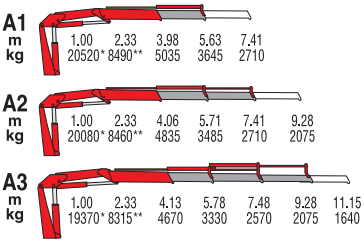

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	20,5	380	315	130	40	9,35	1745	2500x2475x945
A2	-	380	315	130	40	11,05	1880	2500x2475x945
A3	-	380	315	130	40	12,84	2005	2500x2475x945

Ferrari
Ferrari
70

7000 Series

Articulated with double linkage

7090B
7091C
7103C
7111C
7112B
7125C
7130B
7131C
7153C
7160B
7161C
7183C
7210B
7213C
7231C
7240B
7243C
7261C
7401C
7441C

FERRARI

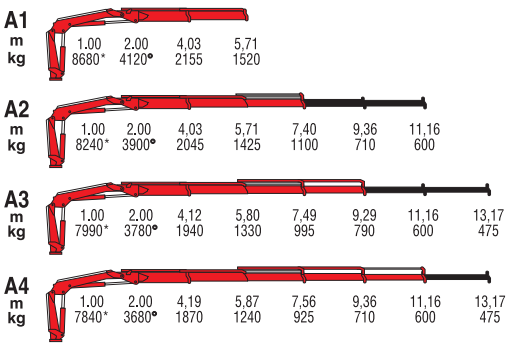

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	8,7	425	310	75	40	9,1	1140	2305x2070x840
A2	-	425	310	75	40	10,7	1220	2305x2070x840
A3	-	425	310	75	40	12,6	1300	2305x2070x840
A4	-	425	310	75	40	14,4	1370	2305x2070x840

FERRARI
PASSION FOR LIFTING

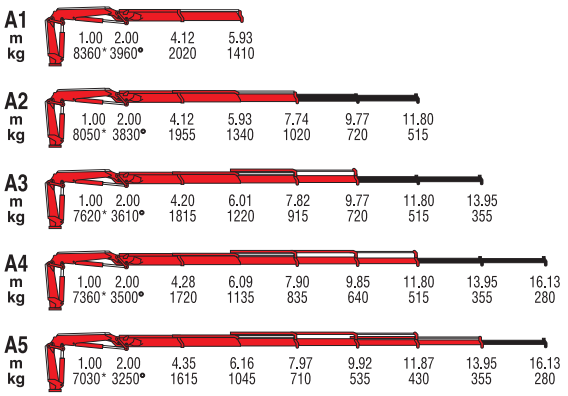

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	8,3	425	315	130	40	9,3	1215	2290x2085x840
A2	-	425	315	130	40	10,9	1305	2290x2085x840
A3	-	425	315	130	40	13,1	1395	2290x2085x840
A4	-	425	315	130	40	15,1	1480	2290x2085x840
A5	-	425	315	130	40	17,3	1555	2290x2085x885

Ferrari

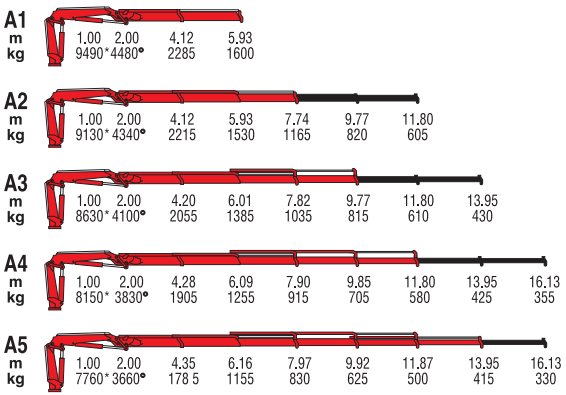

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	9,5	425	350	75	40	9,3	1215	2290x2085x840
A2	-	425	350	75	40	10,9	1305	2290x2085x840
A3	-	425	347	75	40	13,1	1395	2290x2085x840
A4	-	425	340	75	40	15,1	1480	2290x2085x840
A5	-	425	336	75	40	17,3	1555	2290x2085x885

ferrari

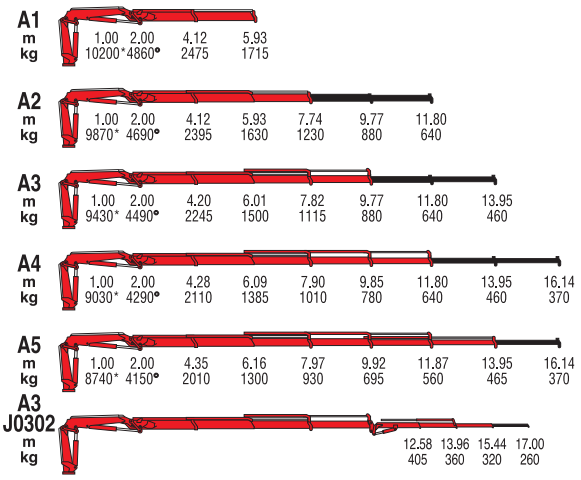

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	10,2	425	315	75	40	9,5	1315	2280x2110x840
A2	-	425	315	75	40	11,3	1425	2280x2110x840
A3	-	425	315	75	40	13,3	1530	2280x2110x840
A4	-	425	315	75	40	15,4	1625	2280x2110x840
A5	-	425	315	75	40	17,4	1715	2280x2110x885
A3 J0302	-	425	315	75	40	18,8	1870	2280x2420x890

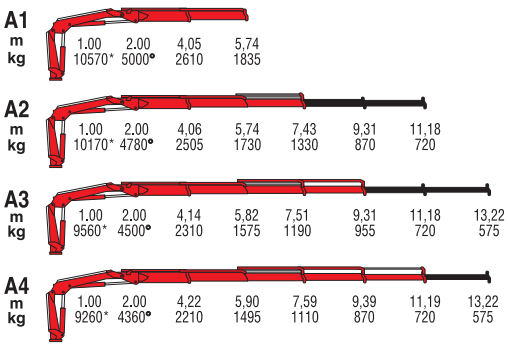

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	10,5	425	300	75	40	9,2	1240	2310x2100x840
A2	-	425	300	75	40	10,8	1340	2310x2100x840
A3	-	425	300	75	40	12,6	1430	2310x2100x840
A4	-	425	300	75	40	14,4	1520	2310x2100x840

Ferrari

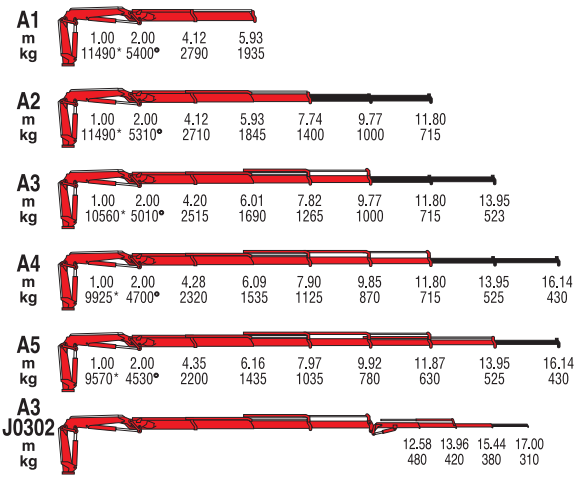

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	11,5	425	350	75	40	9,5	1315	2280x2110x840
A2	-	425	350	75	40	11,3	1425	2280x2110x840
A3	-	425	345	75	40	13,3	1530	2280x2110x840
A4	-	425	340	75	40	15,4	1625	2280x2110x840
A5	-	425	340	75	40	17,5	1715	2280x2110x885
A3 J0302	-	425	350	75	40	18,8	1870	2280x2420x890

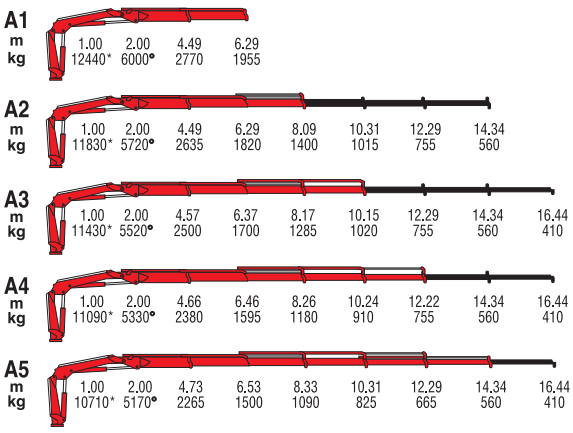

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	12,4	425	285	130	60	9,9	1545	2480x2295x825
A2	-	425	285	130	60	11,7	1665	2480x2295x825
A3	-	425	285	130	60	13,7	1780	2480x2295x825
A4	-	425	285	130	60	15,7	1870	2480x2295x825
A5	-	425	285	130	60	17,8	1955	2480x2295x895

2
Ferrari

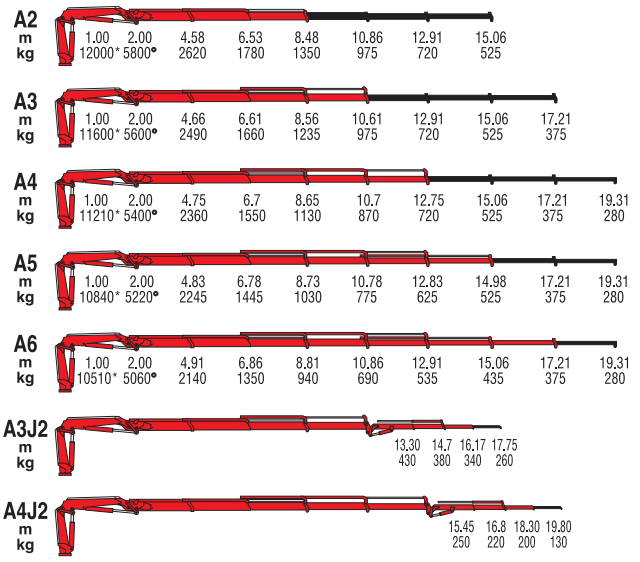

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	12,0	425	290	130	60	12,2	1820	2450x2330x825
A3	-	425	290	130	60	14,4	1935	2450x2330x825
A4	-	425	290	130	60	16,5	2040	2450x2330x825
A5	-	425	290	130	60	18,7	2140	2450x2330x895
A6	-	425	290	130	60	21,0	2230	2450x2330x895
A3J2	-	425	290	130	60	19,9	2245	2450x2450x940
A4J2	-	425	290	130	60	22,0	2350	2475x2497x940

FERRARI

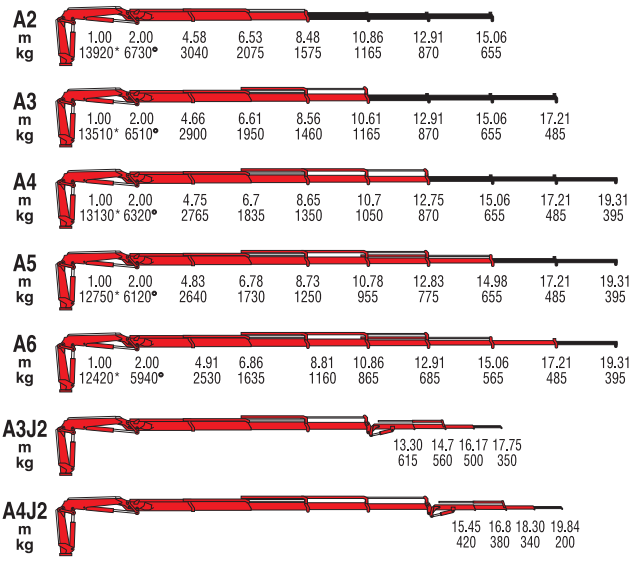

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	13,9	425	325	130	60	12,2	1820	2450x2330x825
A3	-	425	325	130	60	14,4	1935	2450x2330x825
A4	-	425	325	130	60	16,5	2040	2450x2330x825
A5	-	425	325	130	60	18,7	2140	2450x2330x895
A6	-	425	325	130	60	21,0	2230	2450x2330x895
A3J2	-	425	325	130	60	19,9	2245	2450x2450x940
A4J2	-	425	325	130	60	22,0	2350	2475x2497x940

Ferrari

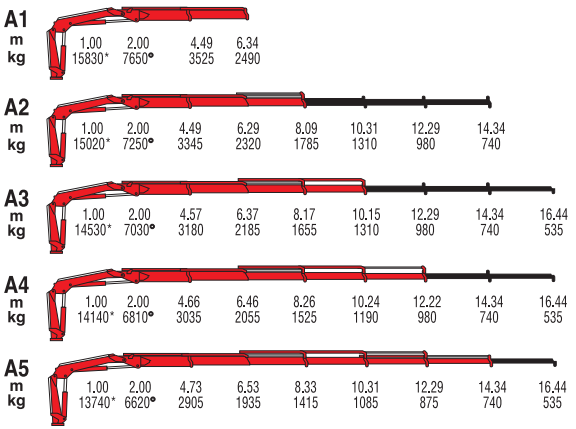

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	15,8	425	280	130	60	9,9	1775	2490x2295x825
A2	-	425	280	130	60	11,7	1910	2490x2295x825
A3	-	425	280	130	60	13,7	2025	2490x2295x825
A4	-	425	280	130	60	15,7	2130	2490x2295x825
A5	-	425	280	130	60	17,8	2220	2490x2295x905

Ferrari

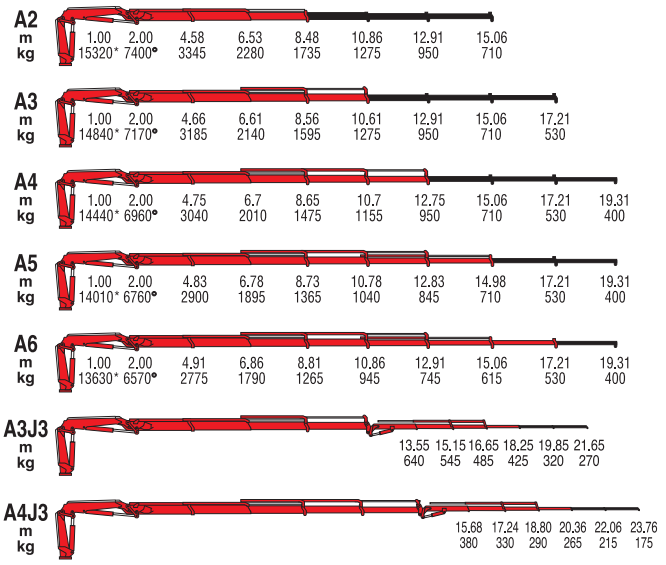

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	15,3	425	300	130	60	12,2	1990	2475x2330x825
A3	-	425	300	130	60	14,4	2120	2475x2330x825
A4	-	425	300	130	60	16,5	2240	2475x2330x825
A5	-	425	300	130	60	18,7	2350	2475x2330x905
A6	-	425	300	130	60	21,0	2445	2475x2330x905
A3J3	-	425	315	130	60	21,9	2610	2475x2615x957
A4J3	-	425	-	130	60	25,7	2740	2475x2640x950

Ferrari

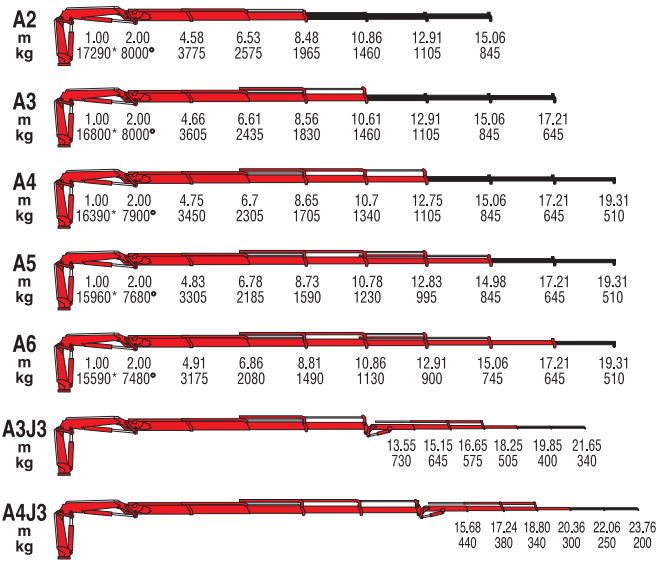

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	17,3	425	330	130	60	12,2	1995	2475x2330x825
A3	-	425	330	130	60	14,4	2125	2475x2330x825
A4	-	425	330	130	60	16,5	2245	2475x2330x825
A5	-	425	330	130	60	18,7	2355	2475x2330x905
A6	-	425	330	130	60	21,0	2450	2475x2330x905
A3J3	-	425	340	130	60	21,9	2615	2475x2615x957
A4J3	-	425	340	130	60	25,7	2745	2475x2640x950

Ferrari
CARGO

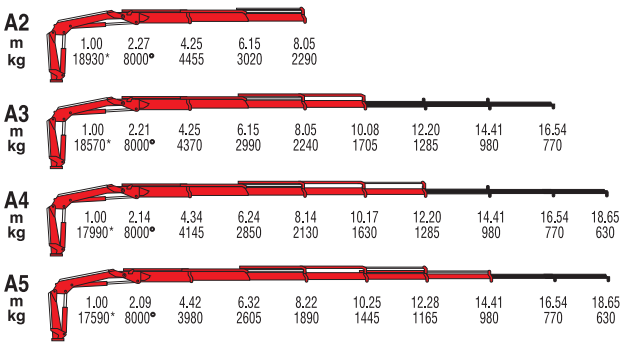

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	18,9	415	315	130	70	11,9	2305	2520x2300x930
A3	-	415	315	130	70	13,9	2455	2520x2300x930
A4	-	415	315	130	70	16,1	2600	2520x2300x930
A5	-	415	315	130	70	18,2	2715	2520x2300x930

7213C

A2										
m	1.00	2.37	4.30	6.27	8.24					
kg	19800*	8000•	4605	3095	2335					
A3										
m	1.00	2.24	4.30	6.27	8.24	10.31	12.46	14.68	16.96	
kg	18750*	8000•	4360	2860	2130	1675	1115	940	725	
A4										
m	1.00	2.16	4.38	6.35	8.32	10.39	12.46	14.67	16.96	19.06
kg	18160*	8000•	4145	2705	1970	1530	1260	940	725	600
A5										
m	1.00	2.09	4.46	6.43	8.40	10.47	12.54	14.67	16.96	19.06
kg	17570*	8000•	3940	2540	1825	1390	1120	945	725	600
A6										
m	1.00	2.04	4.55	6.52	8.49	10.56	12.63	14.76	16.96	19.06
kg	17220*	8000•	3745	2420	1820	1350	1050	845	730	600

*) Theoretical lifting capacity
•) Max lifting capacity

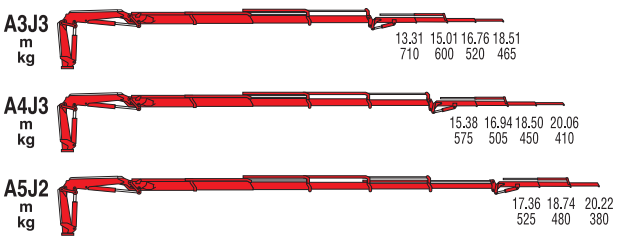

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	19,8	415	320	130	70	12,0	2475	2520x2300x930
A3	-	415	310	130	70	14,1	2625	2520x2300x930
A4	-	415	310	130	70	16,2	2775	2520x2300x930
A5	-	415	310	130	70	18,4	2895	2520x2300x930
A6	-	415	310	130	70	20,7	2990	2520x2300x930
A3J3	-	415	-	130	70	22,2	3285	2520x2695x1050
A4J3	-	415	-	130	70	23,8	3265	2520x2600x1050
A5J2	-	415	-	130	70	23,9	3170	2520x2600x1050

Ferrari

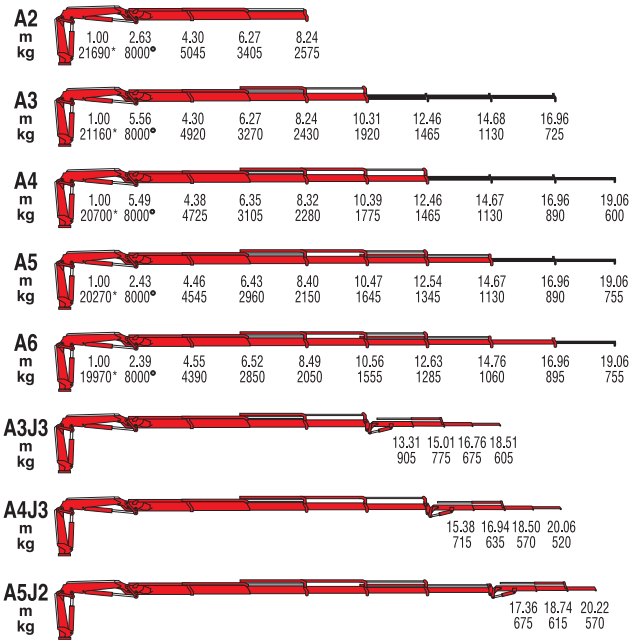

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	21,7	415	345	130	70	12,0	2475	2520x2300x930
A3	-	415	345	130	70	14,1	2625	2520x2300x930
A4	-	415	345	130	70	16,2	2775	2520x2300x930
A5	-	415	345	130	70	18,4	2895	2520x2300x930
A6	-	415	345	130	70	20,7	2990	2520x2300x930
A3J3	-	415	-	130	70	22,2	3285	2520x2695x1050
A4J3	-	415	-	130	70	23,8	3265	2520x2600x1050
A5J2	-	415	-	130	70	23,9	3170	2520x2550x1050

Ferrari

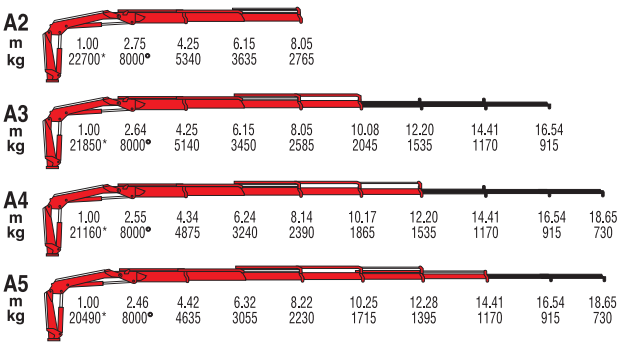

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	22,7	415	320	130	80	11,9	2485	2520x2300x930
A3	-	415	320	130	80	13,9	2640	2520x2300x930
A4	-	415	320	130	80	16,0	2790	2520x2300x930
A5	-	415	320	130	80	18,2	2910	2520x2300x930

7243C



A2											
m	1.00	2.73	4.23	6.16	8.03						
kg	22520*	8000•	5325	3620	2745						



A3											
m	1.00	2.68	4.23	6.13	8.03	10.06	12.17	14.39	16.60		
kg	22140*	8000•	5235	3520	2640	2090	1600	1240	1000		



A4											
m	1.00	2.57	4.31	6.21	8.11	10.14	12.17	14.39	16.60	18.85	
kg	21290*	8000•	4940	3295	2435	1900	1540	1240	1000	750	



A5											
m	1.00	2.46	4.39	6.29	8.19	10.22	12.25	14.38	16.60	18.85	21.13
kg	20460*	8000•	4660	3075	2245	1725	1405	1180	1000	750	570



A6											
m	1.00	2.41	4.48	6.38	8.28	10.31	12.34	14.47	16.60	18.85	21.13
kg	20050*	8000•	4475	2930	2115	1600	1280	1055	905	750	570



A7												
m	1.00	2.35	4.56	6.46	8.36	10.39	12.42	14.55	16.68	18.85	21.13	23.23
kg	19680*	8000•	4315	2800	1995	1485	1160	940	795	695	570	450



A8												
m	1.00	2.31	4.65	6.55	8.45	10.48	12.51	14.64	16.77	18.93	21.13	23.23
kg	19390*	8000•	4170	2690	1900	1395	1070	850	705	605	535	450

*) Theoretical lifting capacity
•) Max lifting capacity

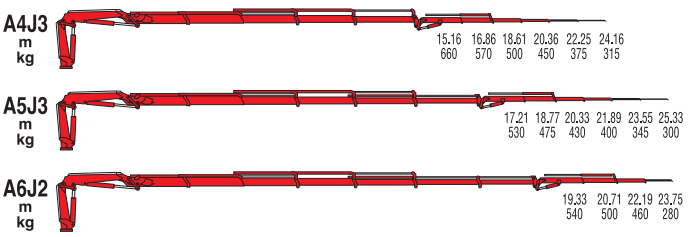

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	22,5	415	315	130	80	11,7	2600	2520x2300x935
A3	-	415	310	130	80	13,8	2740	2520x2300x935
A4	-	415	310	130	80	15,9	2880	2520x2300x935
A5	-	415	310	130	80	18,1	3005	2520x2300x935
A6	-	415	310	130	80	20,3	3110	2520x2300x935
A7	-	415	310	130	80	22,5	3230	2520x2300x1005
A6	-	415	310	130	80	24,8	3320	2520x2300x1005
A4J3	-	415	325	130	80	24,1	3540	2520x2715x1055
A5J3	-	415	330	130	80	25,6	3495	2520x2615x1055
A6J2	-	415	325	130	80	25,9	3385	2520x2605x1055

Ferrari

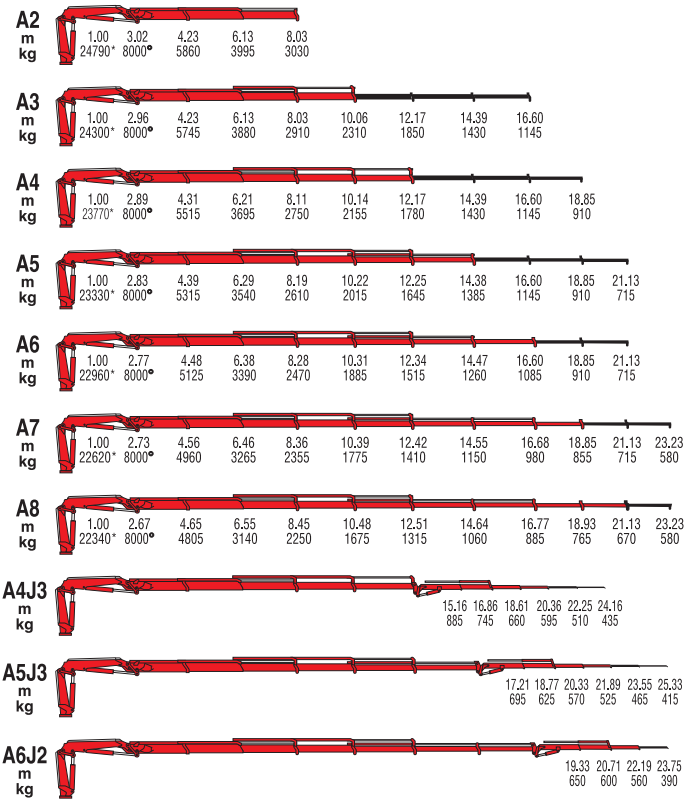

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	24,8	415	345	130	80	11,7	2600	2520x2300x935
A3	-	415	345	130	80	13,8	2740	2520x2300x935
A4	-	415	345	130	80	15,9	2880	2520x2300x935
A5	-	415	345	130	80	18,1	3005	2520x2300x935
A6	-	415	345	130	80	20,3	3110	2520x2300x935
A7	-	415	345	130	80	22,5	3230	2520x2300x1005
A8	-	415	345	130	80	24,8	3320	2520x2300x1005
A4J3	-	415	355	130	80	24,1	3540	2520x2715x1055
A5J3	-	415	350	130	80	25,6	3495	2520x2615x1055
A6J2	-	415	350	130	80	25,9	3385	2520x2605x1055

7401C



A2											
m	1.00	2.91	4.40	6.07	7.97	10.05	12.10	14.25	16.35		
kg	34740*	11500•	7895	5695	4325	3255	2525	1965	1550		



A3											
m	1.00	2.84	4.45	6.15	8.05	10.05	12.10	14.25	16.35	18.67	
kg	33950*	11500•	7630	5440	4095	3255	2525	1965	1550	1205	



A4											
m	1.00	2.78	4.50	6.17	8.10	10.10	12.10	14.25	16.35	18.67	20.85
kg	33300*	11500•	7400	5230	3880	3055	2525	1965	1550	1205	940



A5												
m	1.00	2.70	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95
kg	32540*	11500•	7105	4995	3670	2840	2320	1965	1550	1205	940	800



A6													
m	1.00	2.64	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95	25.05
kg	31900*	11500•	6965	4835	3510	2680	2155	1790	1550	1205	940	800	470



A7													
m	1.00	2.59	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.67	20.85	22.95	25.05
kg	31420*	11500•	6615	4585	3295	2490	1975	1625	1375	1205	940	800	470



A8													
m	1.00	5.52	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.70	20.85	22.95	25.05
kg	30990*	11500•	6525	4450	3155	2350	1835	1475	1230	1060	940	800	470

*) Theoretical lifting capacity
•) Max lifting capacity

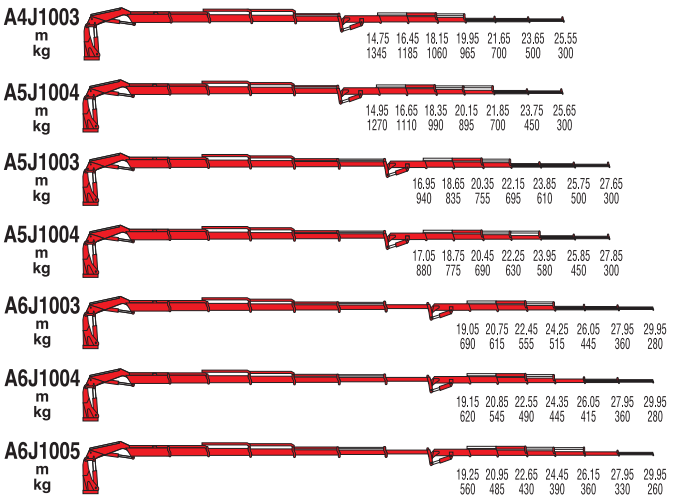

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	34,8	430	325	230	100	12,0	3850	2500x2440x1220
A3	-	430	325	230	100	14,0	4080	2500x2440x1250
A4	-	430	325	230	100	16,0	4300	2500x2440x1250
A5	-	430	325	230	100	18,0	4510	2500x2440x1250
A6	-	430	325	230	100	20,3	4700	2500x2440x1250
A7	-	430	325	230	100	22,6	4880	2500x2440x1350
A8	-	430	325	230	100	24,8	5050	2500x2440x1350
A4J1003	-	430	-	230	100	24,3	4920	2500x2740x1330
A4J1004	-	430	-	230	100	26,1	4990	2500x2740x1330
A5J1003	-	430	-	230	100	26,4	5130	2500x2720x1330
A5J1004	-	430	345	230	100	28,2	5200	2500x2720x1330
A6J1003	-	430	-	230	100	28,5	5320	2510x2740x1330
A6J1004	-	430	-	230	100	30,4	5390	2510x2740x1330
A6J1005	-	430	-	230	100	32,3	5450	2510x2740x1330

Ferrari

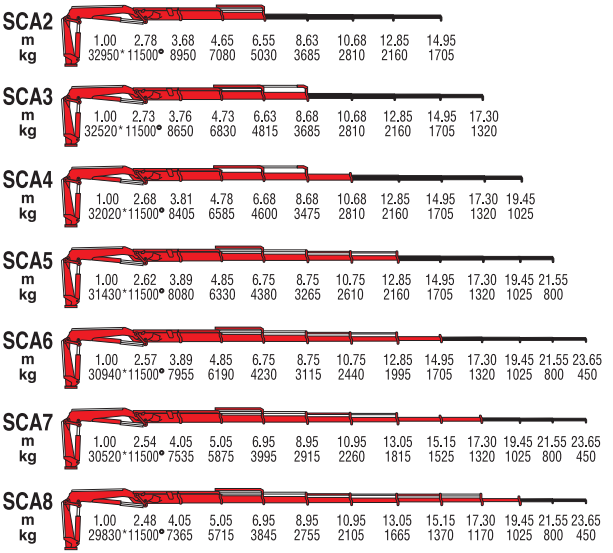

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
SC A2	32,9	430	325	230	100	10,6	3750	2500x2440x1195
SC A3	-	430	325	230	100	12,7	3980	2500x2440x1195
SC A4	-	430	325	230	100	14,8	4200	2500x2440x1240
SC A5	-	430	325	230	100	16,9	4410	2500x2440x1240
SC A6	-	430	325	230	100	19,0	4600	2500x2440x1240
SC A7	-	430	325	230	100	21,3	4780	2500x2440x1350
SC A8	-	430	325	230	100	23,5	4950	2500x2440x1350

7441C

RADIOCONTROL

A2

m	1.00	3.17	4.40	6.07	7.97	10.05	12.10	14.25	16.35
kg	37620*	11500•	8550	6170	4680	3495	2725	2130	1695

A3

m	1.00	3.06	4.45	6.15	8.05	10.05	12.10	14.25	16.35	18.67
kg	36360*	11500•	8170	5835	4385	3495	2725	2130	1695	1330

A4

m	1.00	2.98	4.50	6.17	8.10	10.10	12.10	14.25	16.35	18.67	20.85
kg	35570*	11500•	7905	5605	4175	3285	2725	2130	1695	1330	1055

A5

m	1.00	2.92	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95
kg	34900*	11500•	7620	5370	3960	3080	2520	2130	1695	1330	1055	880

A6

m	1.00	2.86	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95	25.05
kg	34210*	11500•	7470	5220	3795	2910	2345	1965	1695	1330	1055	880	550

A7

m	1.00	2.80	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.67	20.85	22.95	25.05
kg	33730*	11500•	7100	4950	3580	2720	2170	1785	1520	1330	1055	880	550

A8

m	1.00	2.72	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.70	20.85	22.95	25.05
kg	33110*	11500•	6970	4785	3440	2580	2025	1645	1375	1190	1055	880	550

*) Theoretical lifting capacity
•) Max lifting capacity

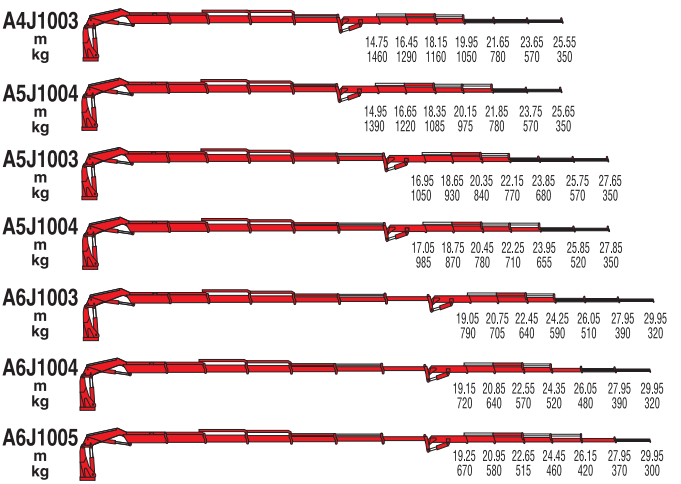

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	37,7	430	345	230	100	12,0	3850	2500x2440x1220
A3	-	430	345	230	100	14,0	4080	2500x2440x1250
A4	-	430	345	230	100	16,0	4300	2500x2440x1250
A5	-	430	345	230	100	18,0	4510	2500x2440x1250
A6	-	430	345	230	100	20,3	4700	2500x2440x1250
A7	-	430	345	230	100	22,6	4880	2500x2440x1350
A8	-	430	345	230	100	24,8	5050	2500x2440x1350
A4J1003	-	430	-	230	100	24,3	4920	2500x2740x1330
A4J1004	-	430	-	230	100	26,1	4990	2500x2740x1330
A5J1003	-	430	-	230	100	26,4	5130	2500x2720x1330
A5J1004	-	430	345	230	100	28,2	5200	2500x2720x1330
A6J1003	-	430	-	230	100	28,5	5320	2510x2740x1330
A6J1004	-	430	-	230	100	30,4	5390	2510x2740x1330
A6J1005	-	430	-	230	100	32,3	5450	2510x2740x1330

700 Serie

Articulated with double linkage

730
734
738R
745
746R
749R

Ferrari
730

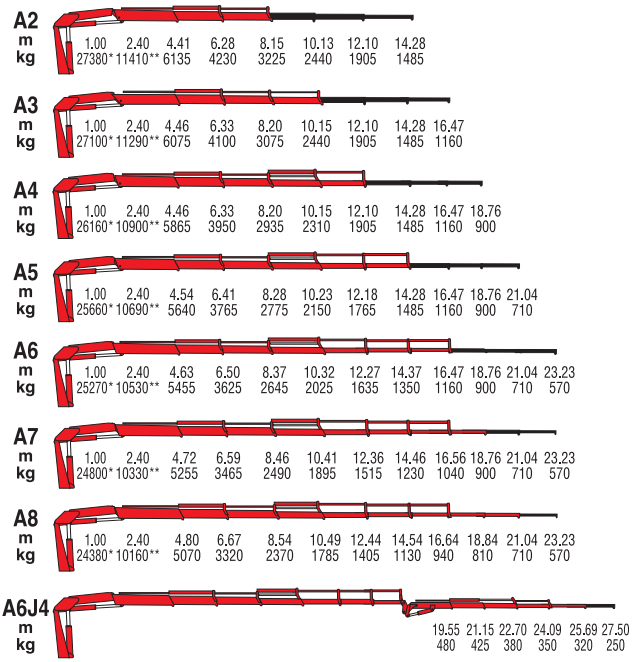

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	27,4	425	325	180	80	11,90	3105	2510x2350x1010
A3	-	425	325	180	80	13,80	3265	2510x2350x1010
A4	-	425	325	180	80	15,80	3420	2510x2350x1010
A5	-	425	325	180	80	17,90	3560	2510x2350x1040
A6	-	425	325	180	80	20,10	3685	2510x2350x1060
A7	-	425	325	180	80	22,40	3800	2510x2350x1160
A8	-	425	325	180	80	24,70	3900	2510x2350x1180
A6J4	-	425	325	180	80	29,10	4260	2510x2705x1190

Ferrari
734
ASTRA

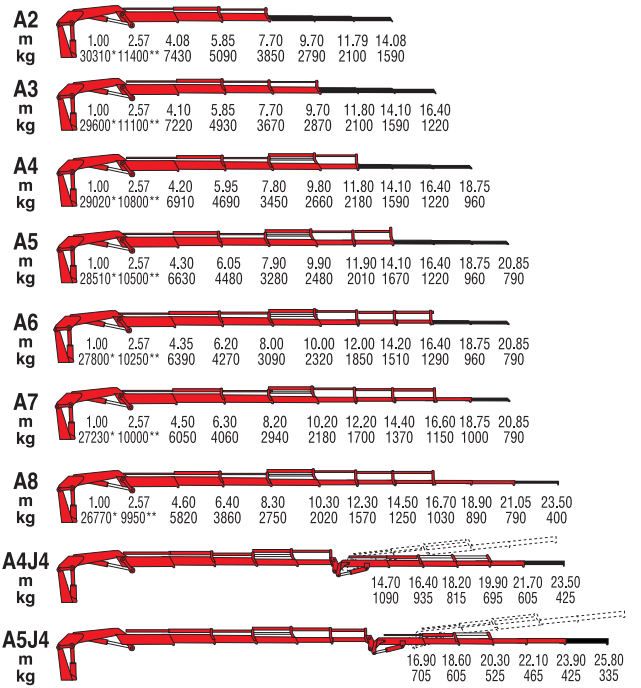

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	30,3	397	300	160	45	11,80	3820	2070x2265x1170
A3	-	397	300	160	45	13,80	4040	2235x2265x1170
A4	-	397	300	160	45	15,80	4270	2325x2310x1170
A5	-	397	300	160	45	18,10	4440	2400x2360x1170
A6	-	397	300	160	45	20,40	4600	2480x2410x1170
A7	-	397	300	160	45	22,70	4720	2480x2485x1330
A8	-	397	300	160	45	25,00	4840	2535x2555x1330
A4J4	-	397	300	160	45	25,70	5110	2535x2620x1330
A5J4	-	397	300	160	45	28,00	5280	2545x2620x1330

738
Ferrari

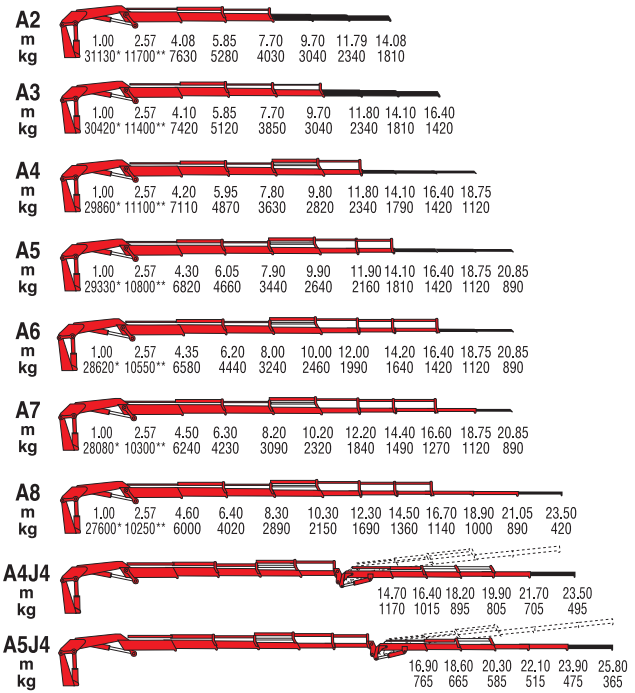

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	31,3	397	310	160	45	11,80	3820	2070x2265x1170
A3	-	397	310	160	45	13,80	4040	2235x2265x1170
A4	-	397	310	160	45	15,80	4270	2325x2310x1170
A5	-	397	310	160	45	18,10	4440	2400x2360x1170
A6	-	397	310	160	45	20,40	4600	2480x2410x1170
A7	-	397	310	160	45	22,70	4720	2480x2485x1330
A8	-	397	310	160	45	25,00	4840	2535x2555x1330
A4J4	-	397	310	160	45	25,70	5110	2535x2620x1330
A5J4	-	397	310	160	45	28,00	5280	2545x2620x1330

Ferrari 745

745 Ferrari
8

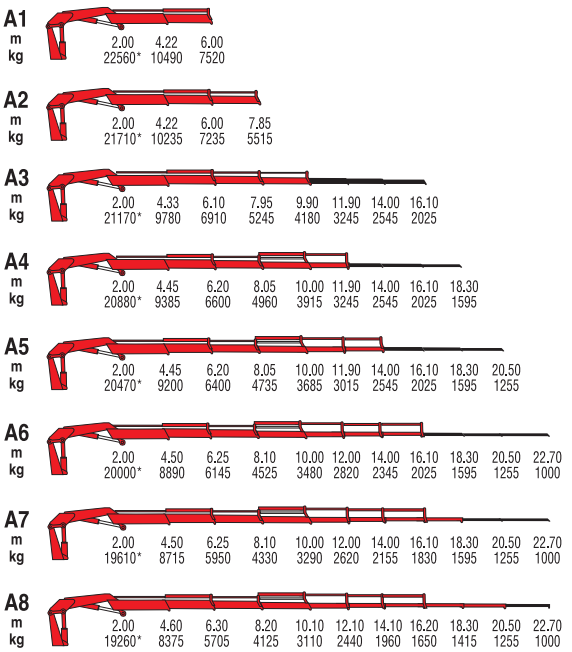

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	45,1	400	300	210	50	10,20	4280	2505x2460x1250
A2	-	400	300	210	50	12,00	4540	2505x2460x1275
A3	-	400	300	210	50	14,10	4790	2505x2460x1275
A4	-	400	300	210	50	16,10	5070	2505x2460x1275
A5	-	400	300	210	50	18,20	5310	2505x2460x1285
A6	-	400	300	210	50	20,30	5510	2505x2460x1285
A7	-	400	300	210	50	22,50	5700	2505x2460x1400
A8	-	400	300	210	50	24,70	5880	2510x2480x1400

Palfinger 140

P
Regler og vilkår fremgår af skilte på pladsen

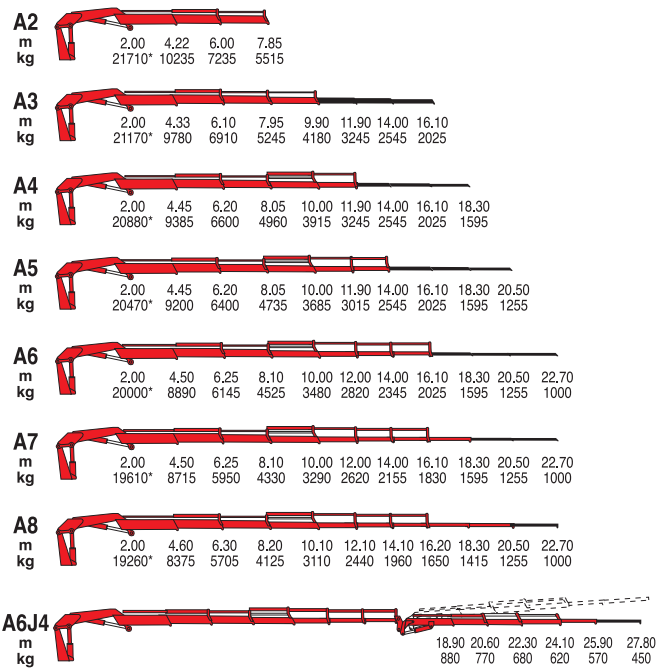

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	43,4	400	300	210	80	12,00	4540	2505x2460x1275
A3	-	400	300	210	80	14,10	4790	2505x2460x1275
A4	-	400	300	210	80	16,10	5070	2505x2460x1275
A5	-	400	300	210	80	18,20	5310	2505x2460x1285
A6	-	400	300	210	80	20,30	5510	2505x2460x1285
A7	-	400	300	210	80	22,50	5700	2505x2460x1400
A8	-	400	300	210	80	24,70	5880	2510x2480x1400
A6J4	-	400	300	210	80	30,10	6380	2515x2725x1470

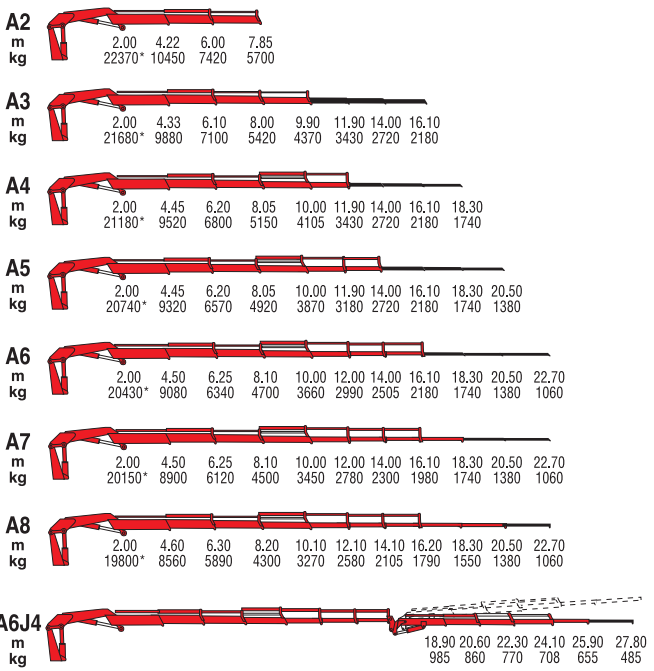

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	44,7	400	320	210	80	12,00	4580	2505x2460x1275
A3	-	400	320	210	80	14,10	4830	2505x2460x1275
A4	-	400	320	210	80	16,10	5110	2505x2460x1275
A5	-	400	320	210	80	18,20	5350	2505x2460x1285
A6	-	400	320	210	80	20,30	5550	2505x2460x1285
A7	-	400	320	210	80	22,50	5740	2505x2460x1400
A8	-	400	320	210	80	24,70	5920	2510x2480x1400
A6J4	-	400	320	210	80	30,10	6420	2515x2725x1470

Ferrari

6000 Series

Medium articulated NO CE

6108B
6148B
6238B
6248B

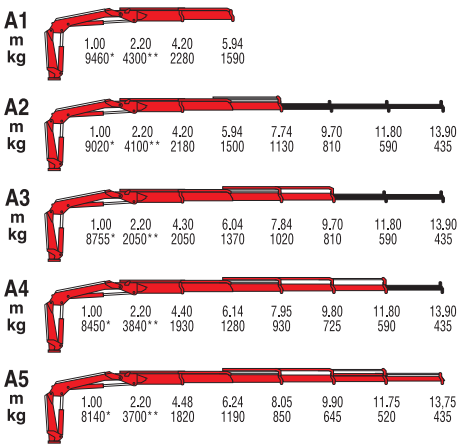

*) Theoretical lifting capacity
**))Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	9,6	395	290	60	25	9,45	1230	2475x2160x740
A2	-	395	290	60	25	11,30	1335	2475x2160x740
A3	-	395	290	60	25	13,20	1430	2475x2160x740
A4	-	395	290	60	25	15,30	1520	2475x2160x740
A5	-	395	290	60	25	17,30	1590	2475x2160x820

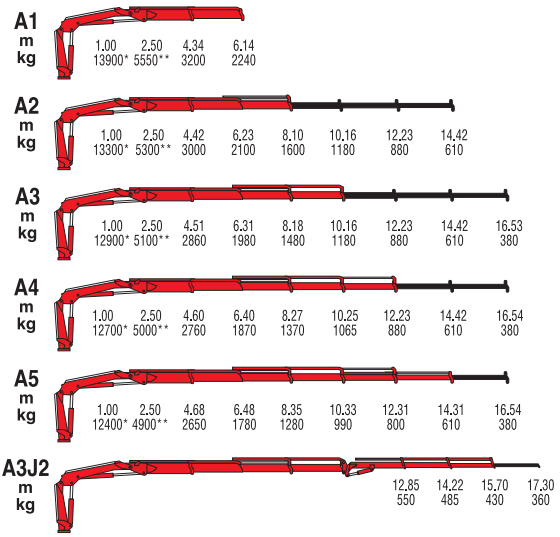

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	13,9	380	290	100	25	9,6	1680	2155x2340x855
A2	-	380	290	100	25	11,5	1810	2155x2340x855
A3	-	380	290	100	25	13,5	1930	2155x2340x855
A4	-	380	290	100	25	15,5	5030	2155x2340x855
A5	-	380	290	100	25	17,5	2120	2155x2340x855
A3J2	-	380	290	100	25	18,8	2240	2155x2340x855

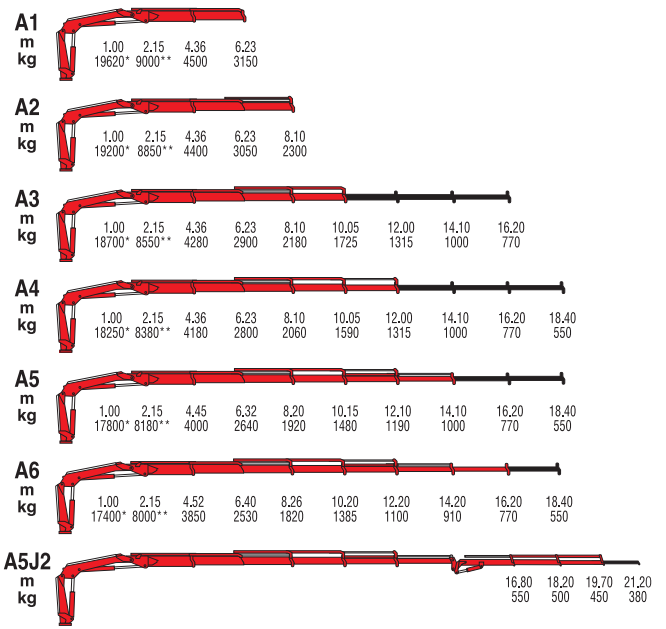

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	19,3	387	300	130	40	9,9	2280	2165x2295x970
A2	-	387	300	130	40	11,8	2430	2210x2295x970
A3	-	387	300	130	40	13,7	2570	2275x2295x1000
A4	-	387	300	130	40	15,7	2700	2370x2295x1000
A5	-	387	300	130	40	17,7	2800	2440x2295x1000
A6	-	387	300	130	40	19,8	2900	2495x2295x1000
A5J2	-	387	300	130	40	23,3	3135	2480x2300x1000

ferrari

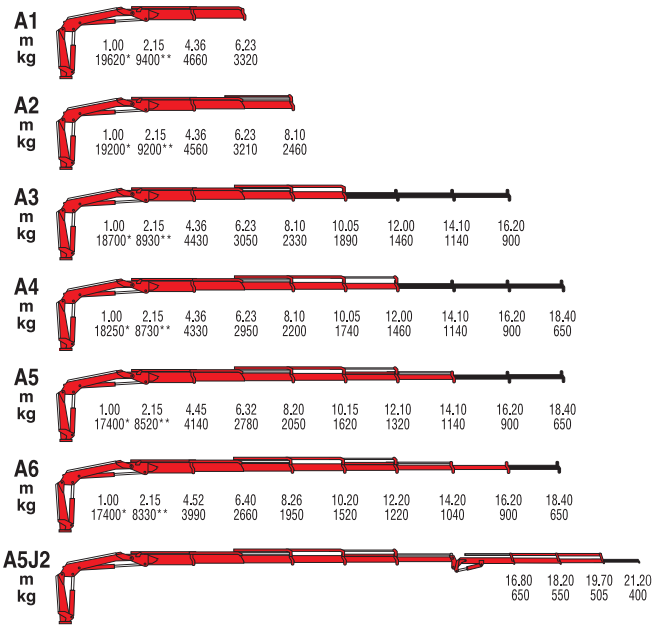

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	20,7	387	315	130	40	9,9	2280	2165x2295x970
A2	-	387	315	130	40	11,8	2430	2210x2295x970
A3	-	387	315	130	40	13,7	2570	2275x2295x1000
A4	-	387	315	130	40	15,7	2700	2370x2295x1000
A5	-	387	315	130	40	17,7	2800	2440x2295x1000
A6	-	387	315	130	40	19,8	2900	2495x2295x1000
A5J2	-	387	315	130	40	23,3	3135	2480x2300x1000

108 tm
PALFINGER

8 Series

Basic articulated NO CE

128
178
258
268

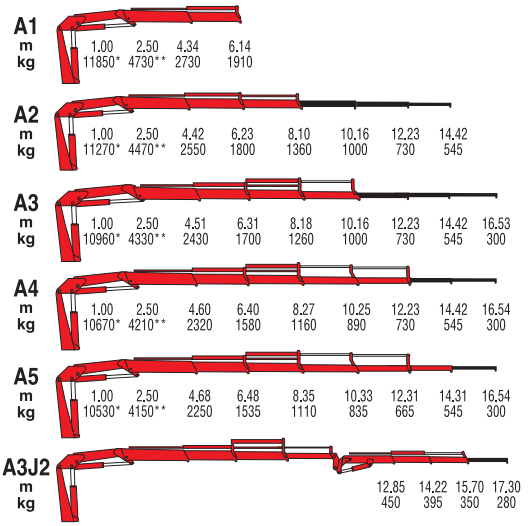

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	11,9	380	310	100	25	9,6	1545	2460x2340x855
A2	-	380	310	100	25	11,5	1665	2460x2340x855
A3	-	380	310	100	25	13,5	1770	2460x2340x855
A4	-	380	310	100	25	15,5	1865	2485x2340x855
A5	-	380	310	100	25	17,6	1955	2500x2340x940
A3J2	-	380	290	100	25	18,8	2080	2490x2340x1030

178
Ferrari

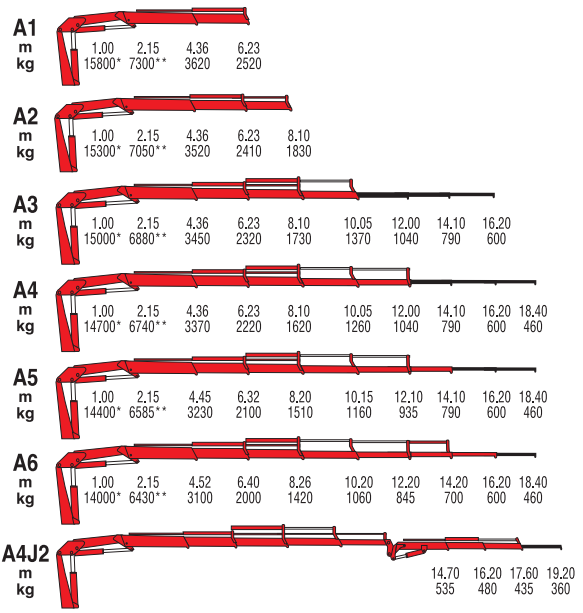

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	15,8	387	310	130	32	9,9	2130	2480x2295x970
A2	-	387	310	130	32	11,8	2270	2480x2295x970
A3	-	387	310	130	32	13,8	2390	2480x2295x1000
A4	-	387	310	130	32	15,7	2510	2485x2295x1000
A5	-	387	310	130	32	17,8	2620	2480x2295x1000
A6	-	387	310	130	32	19,8	2700	2495x2295x1000
A4J2	-	387	310	130	32	21,1	2820	2480x2295x1030

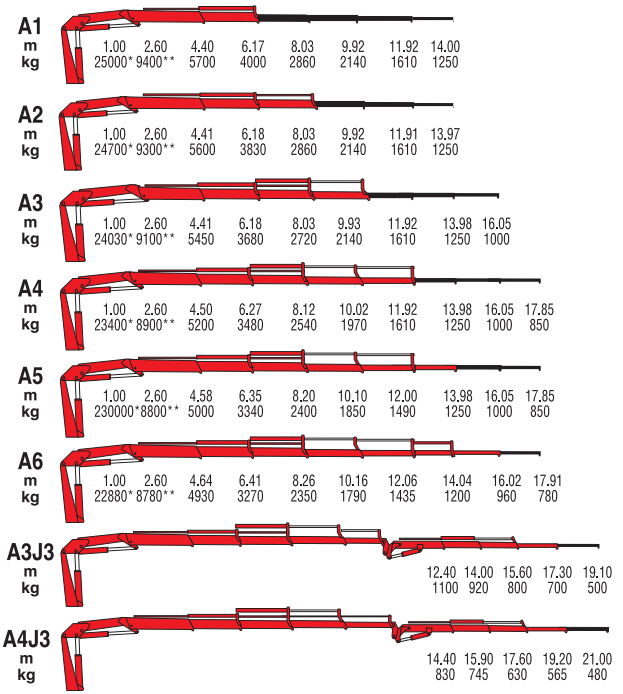

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A1	25,0	400	290	160	50	9,8	3020	2500x2320x1115
A2	-	400	290	160	50	11,6	3200	2500x2320x1115
A3	-	400	290	160	50	13,4	3340	2500x2320x1115
A4	-	400	290	160	50	15,3	3500	2500x2320x1115
A5	-	400	290	160	50	17,3	3640	2500x2320x1115
A6	-	400	290	160	50	19,3	3735	2540x2320x1200
A3J3	-	400	290	160	50	20,2	3890	2500x2430x1300
A4J3	-	400	290	160	50	22,1	4040	2500x2445x1300

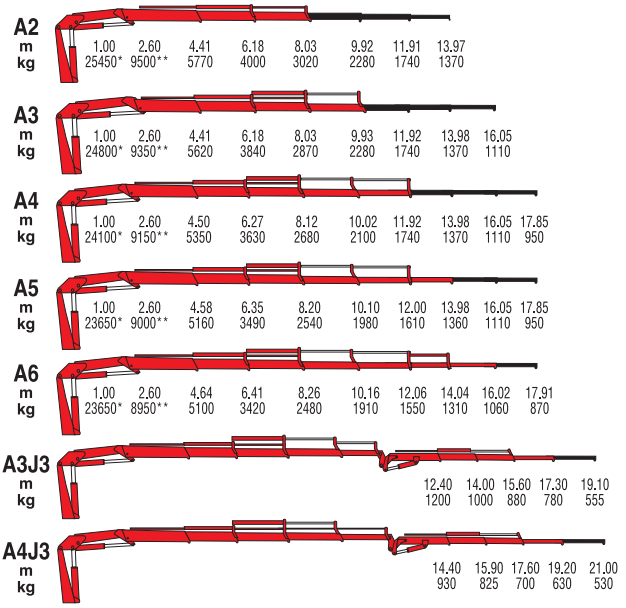

*) Theoretical lifting capacity
**) Capacity at fixed hook (only if with load limiting device in EC area)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	25,4	400	305	160	50	11,6	3250	2500x2320x1115
A3	-	400	305	160	50	13,4	3390	2500x2320x1115
A4	-	400	305	160	50	15,3	3550	2500x2320x1115
A5	-	400	305	160	50	17,3	3690	2500x2320x1115
A6	-	400	305	160	50	19,3	3785	2540x2320x1200
A3J3	-	400	305	160	50	20,2	3940	2500x2430x1300
A4J3	-	400	305	160	50	22,1	4090	2500x2445x1300

Ferrari
IVECO

NEW AGE

9000 Series

Endless slewing with double linkage

9265C
9405C
9445C
9601C
9661C

926SC
Ferrari

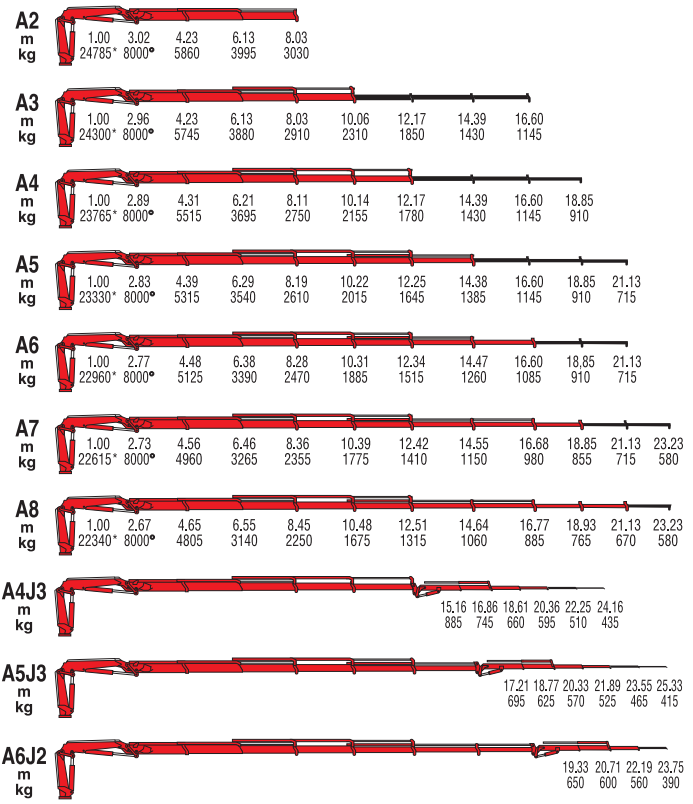

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	24,8	Endless	345	130	80	11,7	2745	2530x2335x980
A3	-	Endless	345	130	80	13,8	2885	2530x2335x980
A4	-	Endless	345	130	80	15,9	3025	2530x2335x980
A5	-	Endless	345	130	80	18,1	3150	2530x2335x980
A6	-	Endless	345	130	80	20,3	3255	2530x2335x980
A7	-	Endless	345	130	80	22,5	3375	2530x2335x1055
A8	-	Endless	345	130	80	24,8	3465	2530x2335x1055
A4J3	-	Endless	355	130	80	24,1	3685	2550x2700x1100
A5J3	-	Endless	355	130	80	25,6	3640	2550x2595x1100
A6J2	-	Endless	350	130	80	25,9	3530	2540x2580x1100

9405C

RADIOCONTROL

A2

m	1.00	2.91	4.40	6.07	7.97	10.05	12.10	14.25	16.35
kg	34740*	11500•	7895	5695	4325	3255	2525	1965	1550

A3

m	1.00	2.84	4.45	6.15	8.05	10.05	12.10	14.25	16.35	18.67
kg	33950*	11500•	7630	5440	4095	3255	2525	1965	1550	1205

A4

m	1.00	2.78	4.50	6.17	8.10	10.10	12.10	14.25	16.35	18.67	20.85
kg	33300*	11500•	7400	5230	3880	3055	2525	1965	1550	1205	940

A5

m	1.00	2.70	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95
kg	32540*	11500•	7105	4995	3670	2840	2320	1965	1550	1205	940	800

A6

m	1.00	2.64	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95	25.05
kg	31900*	11500•	6965	4835	3510	2680	2155	1790	1550	1205	940	800	470

A7

m	1.00	2.59	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.67	20.85	22.95	25.05
kg	31420*	11500•	6615	4585	3295	2490	1975	1625	1375	1205	940	800	470

A8

m	1.00	2.52	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.70	20.85	22.95	25.05
kg	30990*	11500•	6525	4450	3155	2350	1835	1475	1230	1060	940	800	470

*) Theoretical lifting capacity
•) Max lifting capacity

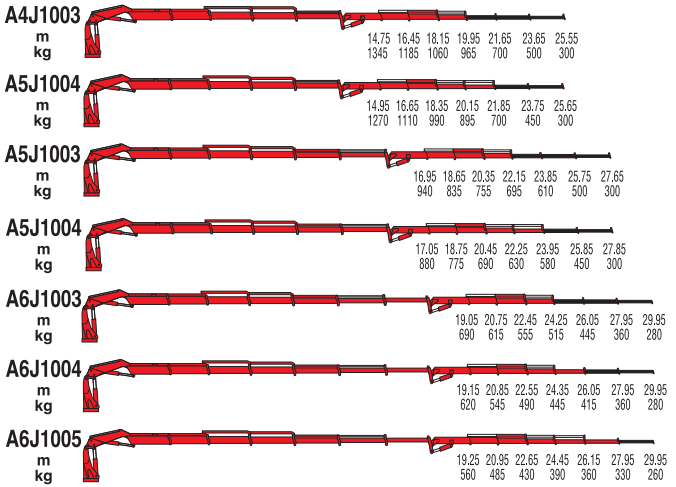

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	34,8	Endless	325	230	100	12,0	4100	2500x2440x1220
A3	-	Endless	325	230	100	14,0	4330	2500x2440x1250
A4	-	Endless	325	230	100	16,0	4550	2500x2440x1250
A5	-	Endless	325	230	100	18,0	4760	2500x2440x1250
A6	-	Endless	325	230	100	20,3	4950	2500x2440x1250
A7	-	Endless	325	230	100	22,6	5130	2500x2440x1350
A8	-	Endless	325	230	100	24,8	5300	2500x2440x1350
A4J1003	-	Endless	-	230	100	24,3	5220	2500x2740x1330
A4J1004	-	Endless	-	230	100	26,1	5290	2500x2740x1330
A5J1003	-	Endless	-	230	100	26,4	5430	2500x2720x1330
A5J1004	-	Endless	345	230	100	28,2	5500	2500x2720x1330
A6J1003	-	Endless	-	230	100	28,5	5620	2510x2740x1330
A6J1004	-	Endless	-	230	100	30,4	5690	2510x2740x1330
A6J1005	-	Endless	-	230	100	32,3	5750	2510x2740x1330

9445C

RADIOCONTROL

A2

m	1.00	3.17	4.40	6.07	7.97	10.05	12.10	14.25	16.35
kg	37620*	11500•	8550	6170	4680	3495	2725	2130	1695

A3

m	1.00	3.06	4.45	6.15	8.05	10.05	12.10	14.25	16.35	18.67
kg	36360*	11500•	8170	5835	4385	3495	2725	2130	1695	1330

A4

m	1.00	2.98	4.50	6.17	8.10	10.10	12.10	14.25	16.35	18.67	20.85
kg	35570*	11500•	7905	5605	4175	3285	2725	2130	1695	1330	1055

A5

m	1.00	2.92	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95
kg	34900*	11500•	7620	5370	3960	3080	2520	2130	1695	1330	1055	880

A6

m	1.00	2.86	4.58	6.25	8.15	10.15	12.15	14.25	16.35	18.67	20.85	22.95	25.05
kg	34210*	11500•	7470	5220	3795	2910	2345	1965	1695	1330	1055	880	550

A7

m	1.00	2.80	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.67	20.85	22.95	25.05
kg	33730*	11500•	7100	4950	3580	2720	2170	1785	1520	1330	1055	880	550

A8

m	1.00	2.72	4.75	6.45	8.35	10.35	12.35	14.45	16.55	18.70	20.85	22.95	25.05
kg	33110*	11500•	6970	4785	3440	2580	2025	1645	1375	1190	1055	880	550

*) Theoretical lifting capacity

•) Max lifting capacity

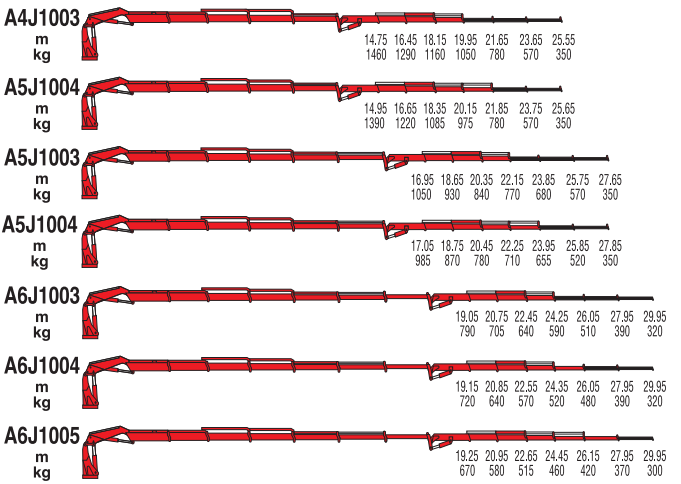

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	37,7	Endless	345	230	100	12,0	4100	2500x2440x1220
A3	-	Endless	345	230	100	14,0	4330	2500x2440x1250
A4	-	Endless	345	230	100	16,0	4550	2500x2440x1250
A5	-	Endless	345	230	100	18,0	4760	2500x2440x1250
A6	-	Endless	345	230	100	20,3	4950	2500x2440x1250
A7	-	Endless	345	230	100	22,6	5130	2500x2440x1350
A8	-	Endless	345	230	100	24,8	5300	2500x2440x1350
A4J1003	-	Endless	-	230	100	24,3	5220	2500x2740x1330
A4J1004	-	Endless	-	230	100	26,1	5290	2500x2740x1330
A5J1003	-	Endless	-	230	100	26,4	5430	2500x2720x1330
A5J1004	-	Endless	345	230	100	28,2	5500	2500x2720x1330
A6J1003	-	Endless	-	230	100	28,5	5620	2510x2740x1330
A6J1004	-	Endless	-	230	100	30,4	5690	2510x2740x1330
A6J1005	-	Endless	-	230	100	32,3	5750	2510x2740x1330

MAERSK
MAERSK
MAERSK
MAERSK
SEALAND

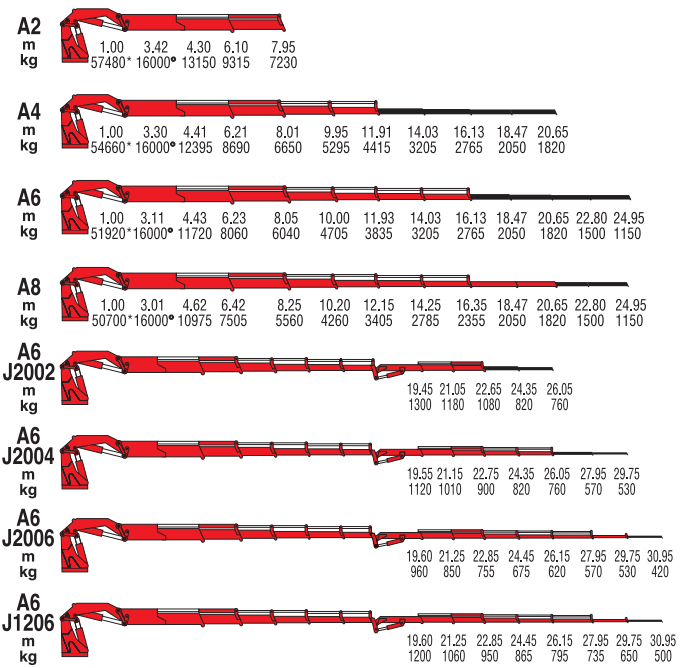

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	57,5	Endless	335	250	100	11,9	5375	2530x2430x1480
A4	-	Endless	335	250	100	15,9	5940	2530x2430x1480
A6	-	Endless	335	250	100	20,3	6465	2530x2430x1480
A8	-	Endless	335	300	100	24,7	6875	2550x2430x1635
A6J2002	-	Endless	-	250/300	100	26,6	7570	2550x2740x1665
A6J2004	-	Endless	-	250/300	100	30,1	7785	2550x2740x1665
A6J2006	-	Endless	-	250/300	100	33,8	7955	2550x2740x1665
A6J1206	-	Endless	-	250/300	100	33,8	7655	2550x2780x1665

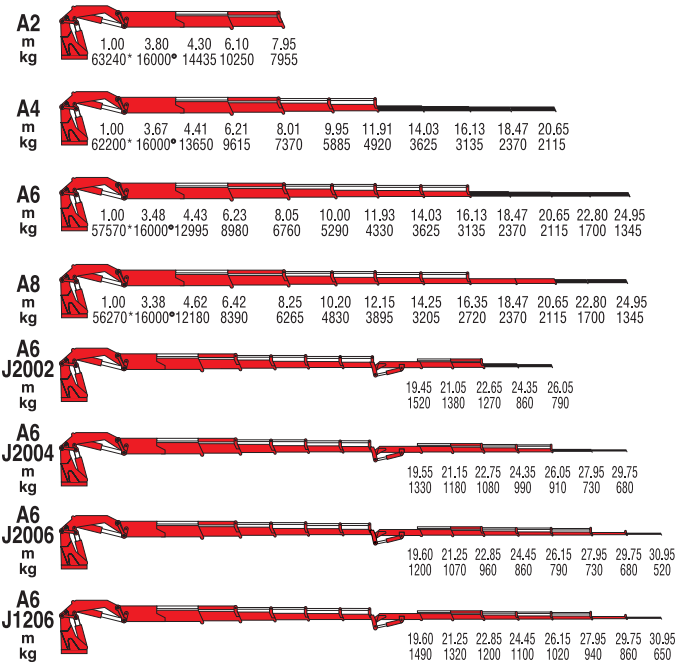

*) Theoretical lifting capacity
•) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	63,2	Endless	365	250	100	11,9	5375	2530x2430x1480
A4	-	Endless	365	250	100	15,9	5940	2530x2430x1480
A6	-	Endless	365	250	100	20,3	6465	2530x2430x1480
A8	-	Endless	365	300	100	24,7	6875	2550x2430x1635
A6J2002	-	Endless	-	250/300	100	26,6	7570	2550x2740x1665
A6J2004	-	Endless	-	250/300	100	30,1	7785	2550x2740x1665
A6J2006	-	Endless	-	250/300	100	33,8	7955	2550x2740x1665
A6J1206	-	Endless	-	250/300	100	33,8	7655	2550x2780x1665

990 Cerreti

900 Serie

Endless slewing with double linkage

990R

990
Ferrari

990R

RADIOCONTROL

A2

m	3.00	4.15	5.85	7.65
kg	24660*	17510	12610	9670

A4

m	3.00	4.22	5.95	7.75	9.65	11.55
kg	23430*	16635	11815	8930	7080	5870

A6

m	3.00	4.37	6.10	7.87	9.80	11.70	13.70	15.70	17.70	19.70	22.10
kg	22570*	15495	10975	8250	6410	5240	4410	3820	2905	2590	1940

A8

m	3.00	4.37	6.10	7.87	9.80	11.70	13.70	15.70	17.70	19.70	22.10	24.25	26.60
kg	21970*	15085	10515	7745	5960	4810	3945	3340	2905	2590	1940	1755	1355

A10

m	3.00	4.65	6.35	8.15	10.10	11.95	13.95	15.95	17.95	19.95	22.10	24.25	26.60
kg	21770*	14045	9800	7185	5450	4335	3525	2935	2500	2195	1940	1755	1305

A6J6

m	18.90	20.50	22.15	23.80	25.50	27.30	29.10	31.10
kg	1705	1505	1365	1240	1130	1040	920	630

A8J4

m	22.40	24.10	25.85	27.60	29.40	31.30
kg	950	850	775	710	660	550

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	74	Endless	315	280	100	12,10	7450	2530x2450x1550
A4	-	Endless	315	280	100	16,00	8100	2530x2450x1550
A6	-	Endless	315	280	100	20,10	8700	2530x2450x1710
A8	-	Endless	315	280	100	24,20	9250	2530x2505x1735
A10	-	Endless	315	280	100	28,80	9650	2530x2635x1735
A6J6	-	Endless	315	280	100	33,50	10200	2530x2800x1840
A8J4	-	Endless	315	280	100	33,80	10100	2545x2875x1840

NEW AGE

7000D Serie

Telescopic boom

7162D
7212D
7240D

7162D A2



m	1.00	2.48	4.28	6.08
kg	16440*	6630	3780	2645

7162DA3



m	1.00	2.56	4.36	6.16	8.14
kg	16270*	6355	3620	2510	1880

7162D A4



m	1.00	2.64	4.44	6.24	8.22	10.20
kg	15970*	6050	3440	2360	1750	1395

7212D A2



m	1.00	2.37	4.17	5.97
kg	20210*	8510	4845	3385

7212DA3



m	1.00	2.46	4.26	6.06	7.99
kg	20760*	8415	4805	3425	2510

7212D A4



m	1.00	2.54	4.34	6.14	8.08	10.02
kg	20540*	8085	4710	3275	2455	1900

7212D A5



m	1.00	2.62	4.42	6.22	8.16	10.10	12.03
kg	19000*	7250	4265	2955	2180	1760	1380

7240D A2



m	1.00	2.37	4.17	5.97
kg	21040*	8655	4985	3525

7240DA3



m	1.00	2.46	4.26	6.06	7.99
kg	21130*	8560	4945	3465	2645

7240D A4



m	1.00	2.54	4.34	6.14	8.08	10.02
kg	20900*	8230	4755	3320	2505	2005

7240D A5



m	1.00	2.62	4.42	6.22	8.16	10.10	12.03
kg	19430*	7385	4395	3040	2270	1825	1490

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
7162D A2	16,4	425	290	130	30	9,8	1620	2485x2300x830
7162D A3	-	425	290	130	30	11,8	1735	2485x2300x830
7162D A4	-	425	290	130	30	13,8	1825	2485x2300x830
7212D A2	20,2	415	315	130	80	9,7	1945	2520x2400x870
7212D A3	-	415	315	130	80	11,7	2090	2520x2400x870
7212D A4	-	415	315	130	80	13,7	2210	2540x2400x870
7212D A5	-	415	300	130	80	15,7	2305	2540x2400x870
7240D A2	20,5	415	335	130	80	9,7	1945	2520x2400x870
7240D A3	-	415	335	130	80	11,7	2090	2520x2400x870
7240D A4	-	415	335	130	80	13,7	2210	2540x2400x870
7240D A5	-	415	320	130	80	15,7	2305	2540x2400x870

Effedi

FBR Series

Heavy duty articulated

FBR 330
FBR 350
FBR 450
FBR 600
FBR 660

FBR 330

RADIOCONTROL

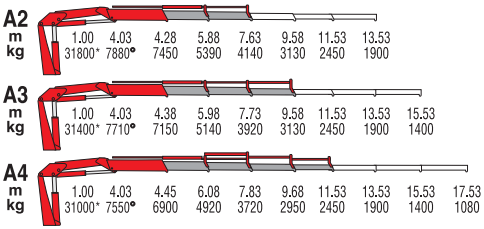

*) Theoretical lifting capacity
°) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	31,8	380	290	130	50	11,6	3145	2550x2490x1175
A3	-	380	290	130	50	13,5	3370	2550x2490x1175
A4	-	380	290	130	50	15,4	3580	2550x2490x1175

FBR 350

RADIOCONTROL

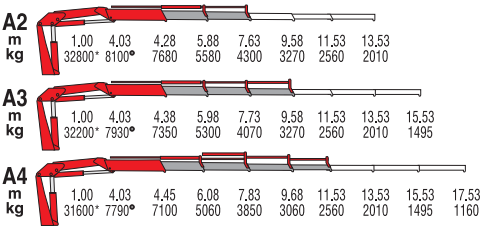

★) Theoretical lifting capacity
∘) Max lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	32,8	380	300	160	50	11,6	3165	2550x2490x1175
A3	-	380	300	160	50	13,5	3390	2550x2490x1175
A4	-	380	300	160	50	15,4	3600	2550x2490x1175

FBR 450

RADIOCONTROL

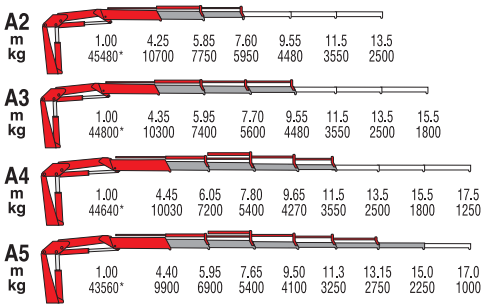

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	45,5	385	270	250	50	11,64	3885	2550x2495x1280
A3	-	385	270	250	50	13,55	4125	2550x2495x1280
A4	-	385	270	250	50	15,46	4330	2550x2495x1280
A5	-	385	270	250	50	19,02	4690	2590x2495x1390

FBR 600

RADIOCONTROL

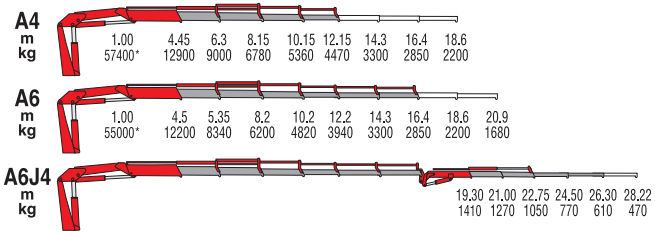

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A4	57,4	428	290	250	70	16,0	5100	2550x2420x1465
A6	-	428	290	250	70	20,2	5600	2550x2420x1465
A6J4	-	428	285	250	70	20,6	6470	2560x2870x1568

FBR 660

RADIOCONTROL

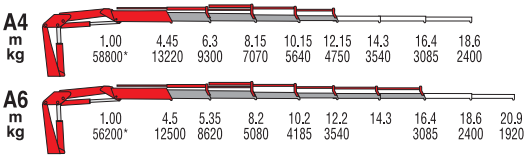

∗) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A4	58,8	428	300	250	70	16,3	5150	2550x2420x1465
A6	-	428	300	250	70	20,5	5650	2550x2420x1465

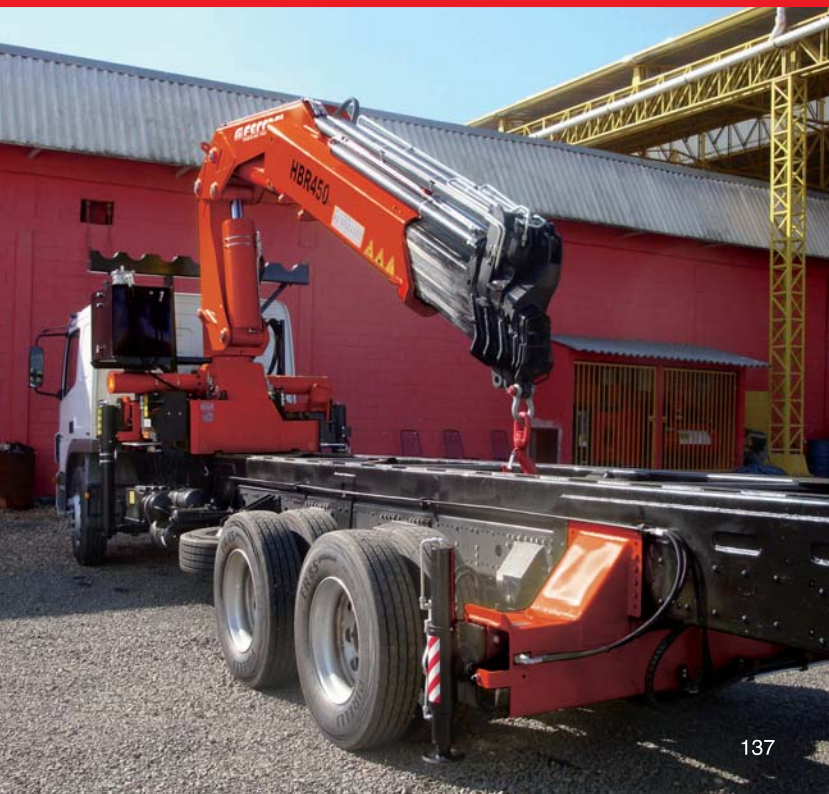
HBR450

Trave line

Trave articulated

FYT 135
FYT 165
FYT 455

FYT 135

RADIOCONTROL



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A3	13	380	195	80	35	12,10	1950	2524x2317x769

FERRARI PASSION FOR LIFTING

FYT 165

RADIOCONTROL



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A3	16,1	380	250	80	35	12,50	2390	2564x2307x783

FYT 455

RADIOCONTROL



A4	2.00	4.30	5.20	8.10	10.00	12.00	14.00	16.00	18.00
m	2.00	4.30	5.20	8.10	10.00	12.00	14.00	16.00	18.00
kg	22850*	10500	7300	5450	4250	3250	2050	1250	1250

*) Theoretical lifting capacity

FYT 455

RADIOCONTROL

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A4	45,7	360	270	140	50	15,75	4910	2600x2540x975

FST14 A4

FST14 A4

Stiff boom

Heavy duty

FST 3.2
FST 6.3
FST 8
FST 12
FST 14

FST 3.2

RADIOCONTROL





MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A2	8	Endless	22	66	40		1500	2255x2239x756
A3	8	Endless	22	66	40		1640	2255x2289x756

FST 6.3

RADIOCONTROL



MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A3	15,75	Endless	22	100	50		2990	2444x2485x881

FST 8

RADIOCONTROL

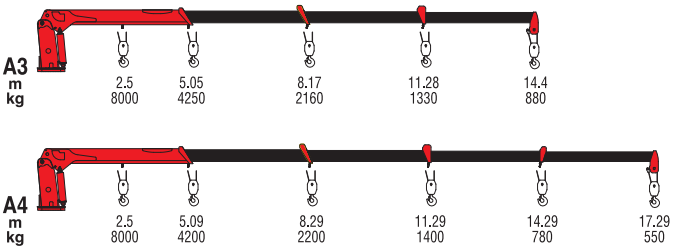

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A3	20	Endless	26	160	63		4060	2498x2700x812
A4	20	Endless	26	160	63		4300	2396x2682x812

FERRARI PASSION FOR LIFTING

FST 12

RADIOCONTROL



MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A4	30	Endless	27	200	84		5300	2446x2669x1030

FST 14

RADIOCONTROL

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	m	kg	mm BxhxS
A4	35	Endless	28	200	84		5760	2500x2692x1042

FERRARI PASSION FOR LIFTING

FST14 A4

FOTON

FST12 A4

2

FFB Series

Light palmoil articulated

FB 11
FB 16
FB 20
FB 50

Easy and Safe



Easy to use and maintain

All the greasing point are in a easy to access position.

Internal Hoses

Protection to damage due to possible collision with branches and working conditions.

4 functions control valve by Walvoil

7 functions control valve by Hidrocontrol

Strong and reliable

Structural design in accordance with: EN12999

Quality ISO9001: 2008 certified

Production from the raw metal to the crane ready to be installed is controlled by quality procedures certified by Lloyd's register according to ISO9001.



Long life painting

Painting process is made to allow the best quality possible and ensure a long crane life in all the applications and environments.

A - Iron grid sandblasting
B - Cathodic electrodeposition paint
C - Yellow polyester powder paint

Hexagonal boom

The use of this technology brings superior performance, reduced maintenance, and less adjustment.

Strong and reliable

Reinforced rack, pinion and gear

(for FB11 - FB16)
Heavy duty application and long life resistance.





Double rack and pinion heavy duty slewing

(for FB20 - FB50) The use of two racks spread the force across twice as many teeth on the pinion. Slewing has more strength for difficult situations.

Internal extension cylinder

(for FB50)



Floating device

Free boom movements to follow field inclination during transport.

Key attachments

3 Jaws grab

Self weight: 35 kg
Capacity: 50 dm^3

4 jaws grab

Self weight: 75 kg
Capacity: 100 dm^3

box grab

Special attachment for bulk material.

EFB (Empty Fruit Bunch) grab

Self weight: 60 kg
Capacity: 120 dm^3

Turnkey solution

Piston Pump & Trac Power

High speed performance for mid-high size models.

Oil tank

Steel oil tank made to be installed on the back of the tractor including oil filter and level indicators.

Stabilizers (for FB50)

Allow higher stability of the tractor during loading/unloading operation.

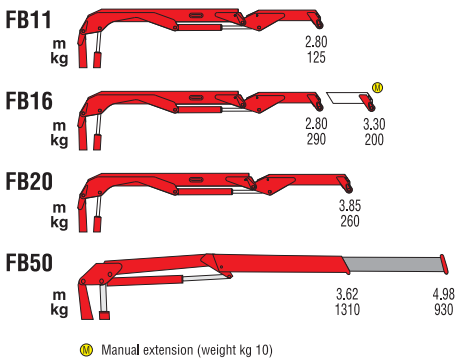

M Manual extension (weight kg 10)

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT WITHOUT MANUAL EXTENSION	RACOMMENDED TRACTOR
	tm	°	bar	l	l/min	m	kg	mm BxhxS
FB11	0,35	330	90	25	12	3,7	195	25 - 65
FB16	0,81	330	160	46	12	3,7	198	25 - 65
FB20	0,90	370	135	35	12	5,7	202	50 +
FB50	4,74	380	275	35	15	6,7	675	80 +

Self-Aligning basket

058D
078ND

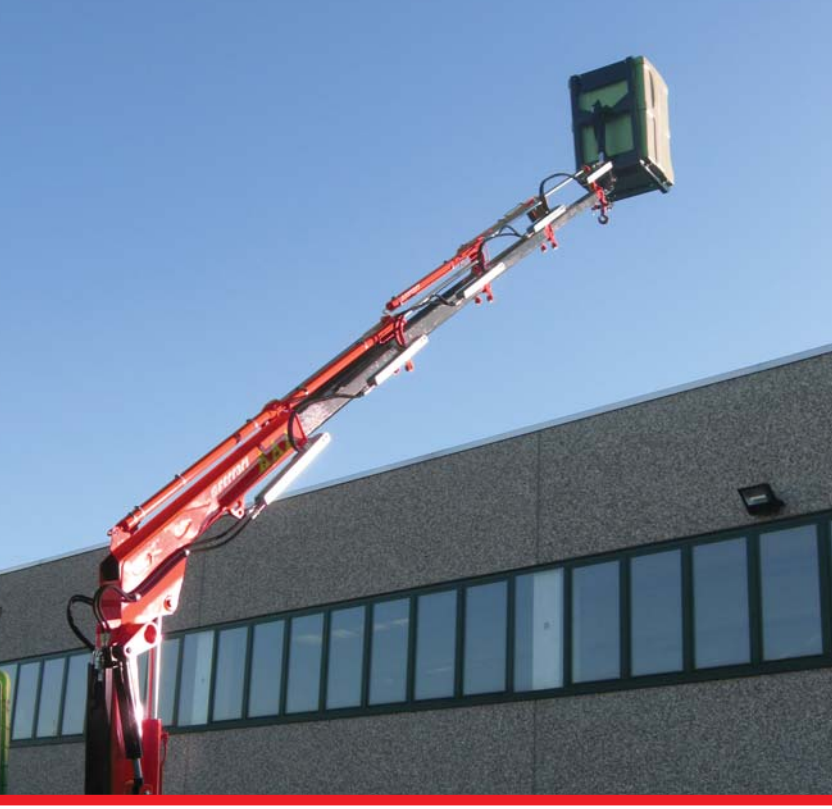

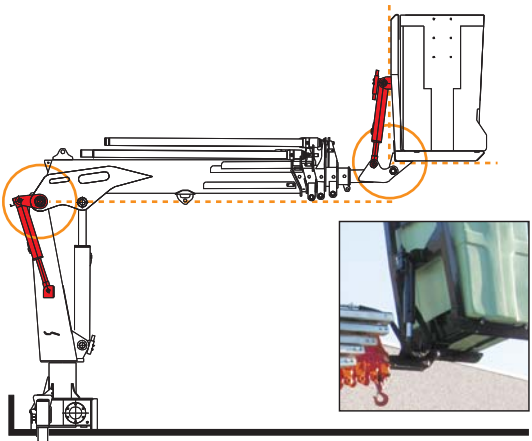

Thanks to the special "self-aligning" balancing system, the position of the basket is always horizontal without any intervention from the user.

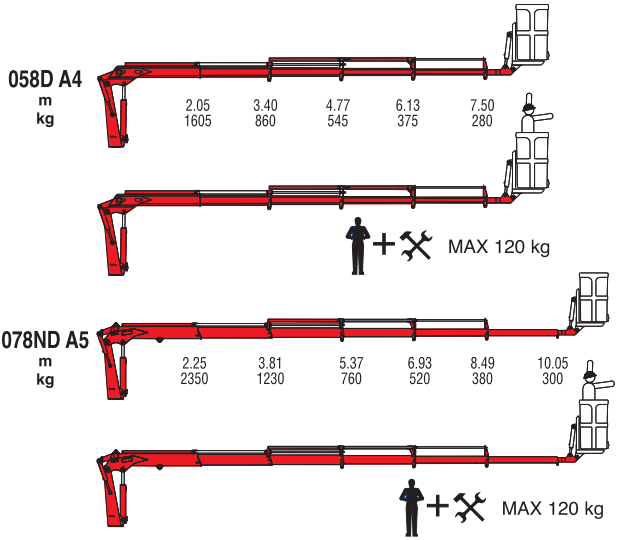

MODELS	LIFTING MOMENT	SLEWING ANGLE	WORKING PRESSURE	OIL TANK CAPACITY	MAX OIL FLOW	MAX. VERTICAL REACH (HYDR.)	CRANE WEIGHT (STAB. STANDARD)	DIMENSIONS
	tm	°	bar	l	l/min	kg	kg	mm BxhxS
058D A4	3,29	380	220	35	15	13,30	940	3305x1940x850
078ND A5	5,29	387	220	35	18	16,00	1260	3765x2080x850

PALFINGER

Features & Accessories

7000 - 9000 NEW AGE

New crane line sets new standards in design, performances, reliability and safety for truck mounted cranes.

A new control station, incorporating both crane and stabiliser controls, has an ergonomic working position and user-friendly interface which delivers better operator efficiency and safety together with improved productivity.

Dynamic Load Diagram allows advance verification of the crane lifting capacity based on the truck stability, and, Magic Touch allows automatic folding and unfolding to transport and working positions.

There are several options for radio remote control and a wide range of stabiliser configurations to ensure safe positioning of the truck in all ground conditions.

The wide slewing angle, 425°, is best-in-class for medium sized cranes. And, with an extensive range of accessories and attachments, the cranes are suited to a wide range of applications.

Durability and lifetime value too is high with enhanced resistance to adverse environmental conditions as a result of a long life painting process, anti-corrosion treatments on non-painted components, protected rubber hose tracks and assembly of components using specialist tools.

Hex Deck cover on base

NEW AGE

Functional aesthetic

Robust structural design
and hose covers.

High volume oil tank made
in sandwich-structured materials.

1st layer, PEX

2nd layer, PA6

Ergonomic control station

The most ergonomic working position and user-friendly interface

Safe and fast stabilisation with outstanding supervision for operator.

LED lights on booms and controls for night working.
(only CE radio configuration)

Magic Touch

NEW AGE

Focus on innovation

A graphic display which allows the driver, after truck stabilisation, to automatically fold (from any position to transport position) and unfold (to working position) when required. This easy-to-use function improves driver attention, promotes safe operation, saves time and can increase productivity.

Dynamic Load Diagram

Focus on innovation

A new system which allows the driver to verify in advance the crane lifting capacity based on the truck stability. The operator can select the weight and, according to the stabiliser positions, the system calculates the stability all around the truck. A graphical display shows the outreach available for the load selected and the actual boom slewing position. This system, a first on truck-mounted articulated cranes, optimises stabilisation and makes crane operation safer and more efficient. Easy to use, saves time and improves safety through better crane stabilisation and avoidance of border line working conditions.

What is Cranes 4.0? Discover benefits and features!

A simple installation and a powerful web interface create the best combination to access to all crane data. A gateway GPS reads all data and send them to the cloud to store in a protected and organized way all crane analytics from crane sensors and electronics.

Cranes 4.0 is an accessory for your **Ferrari New Age** crane that ensure to growth of your business in the easiest but powerful way.

This will grant:

- **Improved control of your business**
- **Manage and mantain your crane with high efficiency**
- **Obtain remote support: focused, quick and efficient.**

Improve your efficiency with an easy remote crane management

Manage and maintain your crane more efficiently

Turnkey so lution

Cranes 4.0 includes the gateway GPS (installed on the crane in factory or available as retrofit kit), SIM card with 5 years contract and full access to data on cloud portal (available from all devices).

Firmware update

From remote, the last firmware realease installed on your crane without any hard stop or service intervent on the crane in field. This means that your crane will always be updated with improvements that we are constantly releasing as a result of the feedback received from the market.

Real time monitoring

The web interface shows all crane parameters in real time: sensors, angle, stabilizer position, ... You can follow and analyze the crane work directly from remote. Whereaver you are connected to the Internet, live crane data will be available.

Maps

Geolocalize fleet to follow position, data and status your entire fleet. Totally transparent with respect to the operation of the crane.

Fleet to follow position, data and status

Display of time trend graphs of specific sensors (for example hydraulic oil temperature, oil pressure on the lifting cylinder, weight lifted, etc.). This means that it is also possible to carry out statistical analyses to improve crane maintenance through quick and easy functional monitoring, preventing breakdowns or providing ad hoc technical assistance.

Routes

See live on maps your crane routes during the day or in a specific timeline. Routes is useful to improve you daily job planning or reviewing transport cycles and working site visits.

Remote set-up

Crane configuration parameters can be modified to improve the efficiency for a specific application, abilitate a tool or troubleshooting. The advantage is the presence of a specialised technician is not required on site, who can do it remotely.

Black box events

Crane 4.0 gateway save all data events of the crane including alarms, arnings, sensors data ... All information are available for a better check of functionalities and history event.

Crane configurations CE market

All F.lli Ferrari cranes for CE markets comply with the European Standard EN 12999:2020 and EN 13849 for a higher level of safety and performance in crane controls.

A new control station, incorporating both crane and stabiliser controls, has an ergonomic working position and user-friendly interface which delivers better operator efficiency and safety together with improved productivity.

Dynamic Load Diagram allows advance verification of the crane lifting capacity based on the truck stability, and, Magic Touch allows automatic folding and unfolding to transport and working positions.

There are several options for radio remote control and a wide range of stabiliser configurations to ensure safe positioning of the truck in all ground conditions.

Crane control system

A CLASS





N. 2 step stabilizer beams

N. 1 sector on slewing

Mono-area pressure limit

E CLASS





N. 2 step stabilizer beams

Proportional slewing control

Mono-area pressure limit

P CLASS





Proportional stabilizers control

Proportional slewing control

Truck side independent

- Stabilizer's cylinders not on the ground
- 0% stabilizer's beams and stabilizer's cylinders on the ground
- 50% stabilizer's beams and stabilizer's cylinders on the ground
- 100% stabilizer's beams and stabilizer's cylinders on the ground
- Nominal pressure

The percentages present in the pictures are merely examples and they have no bearing on the cranes' real lifting capacities. The cranes' real lifting capacities will depend on truck's stability.

NEW STABILITY LOGIC



BE FREE TO MAXIMIZE THE USE OF YOUR CRANE FOR ALL STABILIZERS' POSITIONS.

Whether there is the space to extend the stabilizer's beams or not, whether there is the possibility to deploy the stabilizer's cylinders or not, an internal algorithm of the cranes' software computes all stability conditions and enables safe movements that the crane is allowed to perform, guaranteeing the maximum level of flexibility that each daily operation requires.

Human machine interface

Bright Led panel

L

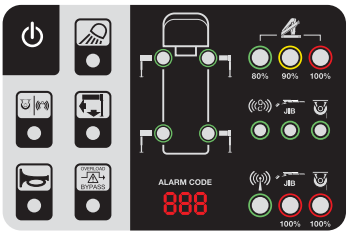

Available for the entire range till 28 tm.
Highly user-friendly design, with buttons and LED lights.
Dedicated led lights to identify the positon of each stabilizer.
New 3-digits display has been added to inform the operator about alarms and errors.

Intelligent Display 4.3”

D

Up to 6 languages available.
Full color new display.
Offers more information and data compared to the LED Panel.
The graphic design and intuitive menu guide the operator and service technician to all the functionality information, statistics and perfomances.

Smart Top monitor 7”

T

Up to 16 languages available into the software.
Top choice available for the range.
Data statistics and crane management, all included into a 7” TFT monitor giving to the operator a higher level of awareness of the crane.

FEATURES FOR CRANE OPERATOR

FEATURE	LED PANEL	DISPLAY 4.3”	MONITOR 7”
Load capacity indication 80 - 90 - 100%	●	●	●
Crane status code displayed	●	●	●
Worklights option	●	●	●
Crane bypass option	●	●	●
Stabilizers position detection	●	●	●
Hour counter		●	●
Predictive maintenance alarm		●	●
Intuitive graphic design		●	●
Crane status messages		●	●
Multi-language		●	●
Predictive maintenance detailed			●
Crane performance stats (load, cycles, ...)			●
Dynamic load diagram			●

Crane controls

Manual control M

Crane with manual sequential controls have levers mounted on both sides
of the crane.
At each control station, the orientation of the controls can be the same up to down or left to right.

Single hand Remote control S

The compact, ergonomic design of the transmitter allows easy operation of the crane with only one hand.
The operator chooses the function to move by pressing a switch and then, proportionally adjust the speed by pressing the trigger.

LCD Remote control L

Each transmitter is equipped with 8 ergonomic proportional levers (6 for Scanreco mini) to control up to 8 functions of the crane.
Using two hands, the operator can move 2-3-4 functions at once.
This ensure more speed in loading or unloading operations with high precision.

Graphic Remote control G

Top visualization on 3” graphic display on the remote transmitter.
Improved crane data visualization and crane control.
Top level class proposal in the range.

CRANE CONFIGURATIONS CE

CRANE SELECTION	CRANE CONTROL SYSTEM			HUMAN MACHINE INTERFACE			CRANE CONTROL			
RANGE	A CLASS	E CLASS	P CLASS	LED PANEL	DISPLAY 4.3"	MONITOR 7"	MANUAL	SINGLE	LCD	GRAPHIC
1 - 3 tm	●			●			●	○		
4 - 8 tm	●	○		●	○		●	○	○	
9 - 18 tm	●	○	○	●	○	○	●		○	○
29 - 85 tm			●			●			●	○

● STANDARD ○ OPTIONAL

Crane configuration CE market

MODEL	CE*	ALM	ALS	ALL	ADM	ADS	ADL	ELM	ELS
310	•								
314	•								
315		•	•						
321	•								
322		•	•						
329	•								
330		•	•						
350		•	•						
531	•								
538	•		•			•			
543	•	•	•		•	•		•	•
553		•	•		•	•		•	•
563		•	•	•	•	•	•	•	•
573		•	•	•	•	•	•	•	•
583		•		•	•		•	•	
7090B		•		•	•		•	•	
7091C		•		•	•		•	•	
7103C				•			•		
7111C		•		•	•		•	•	
7112B		•		•	•		•	•	
7130B		•		•	•		•	•	
7131C		•		•	•		•	•	
7153C				•			•		
7160B		•		•	•		•	•	
7161C		•		•	•		•	•	
7183C				•			•		
7210B		•		•	•		•	•	
7213C		•		•	•		•	•	
7231C				•			•		
7240B		•		•	•		•	•	
7243C		•		•	•		•	•	
7261C				•			•		
7401C									
7441C									
730									
734									
738R									
749R									
9265C									
9405C									
9445C									
9601C									
9661C									
990R									
7162D		•		•	•		•	•	
7212D		•		•	•		•	•	
7240D		•		•	•		•	•	

Crane control system - **A** = A Class • **E** = E Class • **P** = P Class
Human machine interface - **L** = Bright led panel • **D** = Intelligent display 4.3" • **T** = Smart TOP monitor 7"

Example

P T G

- **P** — Crane control system
- **T** — Human machine interface
- **G** — Crane Controls

CE* - Crane according to CE standard but without moment limiter

ELL	EDM	EDS	EDL	PDM	PDL	PDG	PTM	PTL	PTG
	•	•							
	•	•							
•	•	•	•						
•	•	•	•						
•	•		•						
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•			•		•	•		•	•
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•			•		•	•		•	•
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•			•		•	•		•	•
•	•		•	•	•	•	•	•	•
•	•		•	•	•	•	•	•	•
•			•		•	•		•	•
								•	•
								•	•

Radio remote control

RADIOCONTROL

The operator can control the crane with high precision proportional levers in every position and, doing so, can supervise the loading and unloading operations.
That means a great time saving and a higher safety.

All the remote controls used by F.lli FERRARI have an identification code and are shielded from electromagnetic fields and from external radio signals.

Scanreco

Hetronic Not CE

Powered by

Danfoss

Radio remote control

The transmitter is equipped with a large display.
Watching this display the operator always knows the lifting condition of the crane and is informed about possible warning messages or alarm codes. The data displayed is an exact copy of the data present on the ECM.

The transmitter is equipped with an ON-OFF switch in order to allow the user to engage the accessories (Winch, Grab/Rotator, Jib) without the necessity to use the buttons on the ECM. As on the standard transmitters, the CAN-Bus radio also allows control of the truck engine.

Hetronic CE Basic

Only the model 990R is standard equipped with CANBUS radio remote control on both CE and NO CE versions.

Hetronic CE Graphic

4” TFT HD-color display to keep the crane always under control

RDC

A crane in the palm of your hand

Innovative “Single Hand” radio remote control by Hetronic

- Transmitter with compact dimensions and minimal weight
- Proportional speed control
- Single-hand control of every crane function by radio
- Safe stabilizer operation by radio control
- Cable control (optional)
- Transmitter operation with two batteries

RADIOCONTROL

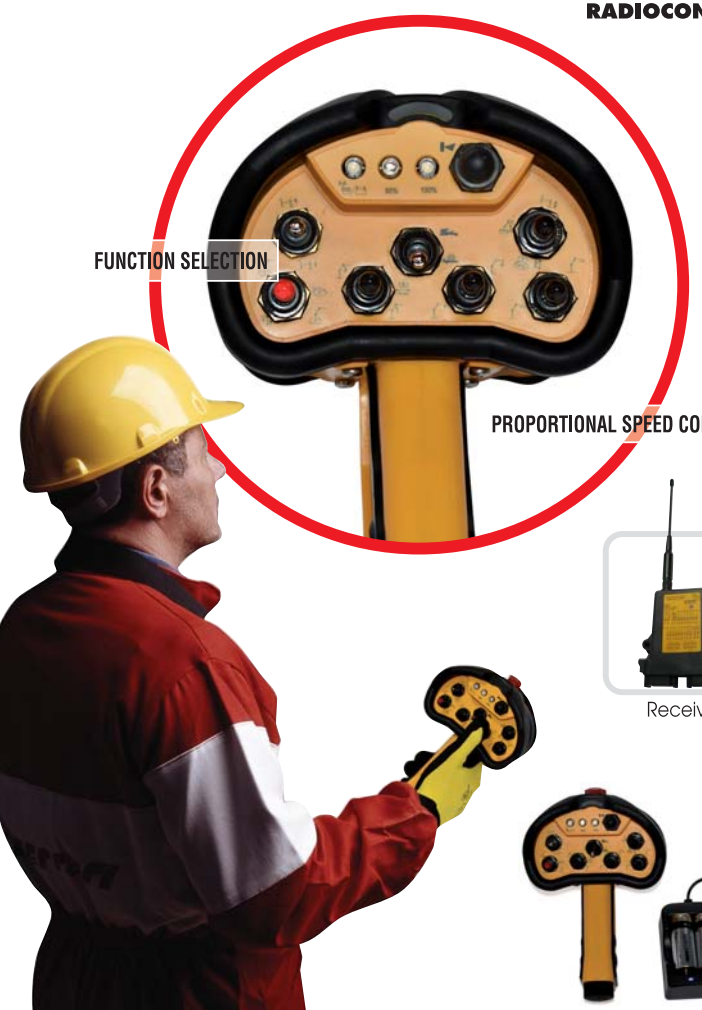

Receiver

Ferrari PASSION FOR LIFTING

329
FERRARI

FERRARI

TWICE THE POWER*

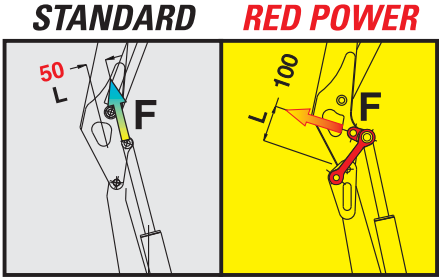

Power = F x L

F = *Strength of the lifting cylinder*

L = *Lever of the lifting cylinder*

***"Red Power"** means more leverage to the crane booms.*
This leverage is achieved through an articulating connecting rod system.

**) In vertical position*

Constant capacity in all positions

"Red Power" brings more leverage to the crane booms and increases crane versatility for many working positions.
The double linkage joins the articulation cylinder to the boom.
Its design raises the mechanical advantage of the articulation, to provide consistent force through all working angles.

OFP
Operator Full Protection

"The green area surrounding the operator represents the space where the crane's boom cannot enter."

Our technical department developed a new safety system which monitors the control position where the operator is moving the crane, and prevents the crane's booms from entering the zone close to the operator.

Two presence sensors are mounted on the crane's control stations in order to verify where the operator is working, and other sensors monitor the control levers' positions. By sensors applied between the base and the column, the safety system can monitor the slewing sector where the crane is located. Two level sensors constantly monitor the position of the two booms.

Once the operator starts working from a control station, the Operator Full Protection System generates a limitation zone around him in order to avoid any interference between the operator and the crane.

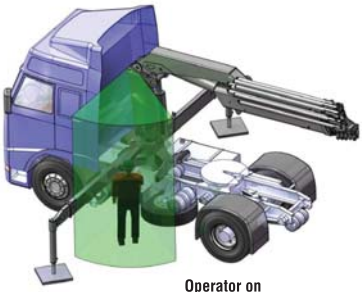

Operator on control valve side

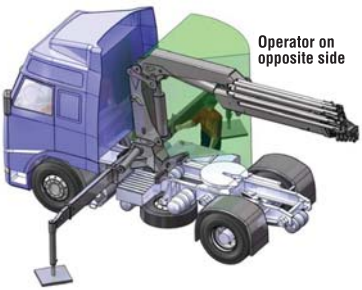

Operator on opposite side

RLC

This device shows the load at the hook on a display placed near the controls, making safe the use of the mechanical booms following the European rule EN12999. In case of a CE crane with mechanical booms it is mandatory to mount the RLC device.

Notes

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon F.lli Ferrari Italy S.p.A. Future modifications are solely at the discretion of F.lli Ferrari Italy S.p.A. and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by F.lli Ferrari Italy S.p.A.

F.lli Ferrari in the World

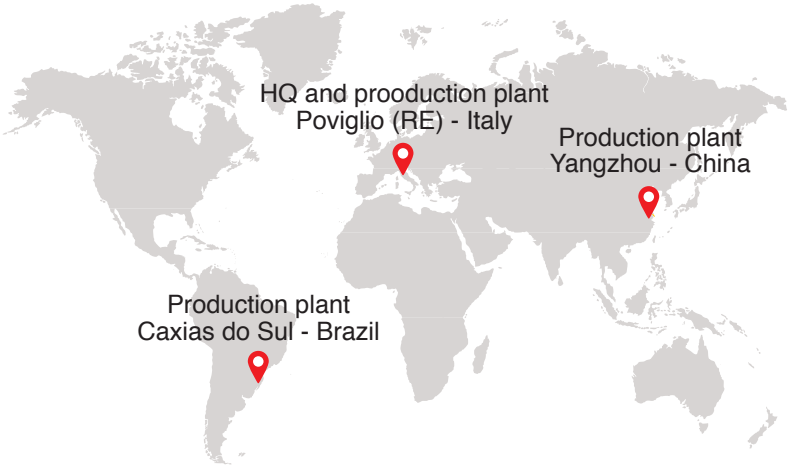

DEALER

F.lli Ferrari Italy S.p.A.
Via Einstein, 4
42028 Poviglio (RE) Italy
Tel. +39 0522/486308
Fax +39 0522/486330
info@flliferrari.it
www.flliferrari.com

ISO 9001 • ISO 14001

M.K.T. 7.84.0001. Date of printing: 01/05/2026 REV.4