




FERRARI 9601CR A8 (NO CE)

hydraulic outreach: 20,65 m
lifting height above the counter-frame, hydraulic: 23,3 m
stabilizers with hydraulic extension, spread: 8,67 m (+200 kg)
articulated stabilizer feet and hoses inside the stabilizer beams
slewing bearing with gearmotor n: 2
endless slewing
rotating hook, capacity: 16,0 t
crane weight: 6980 kg
standard color: red RAL 3000
Red Power - SDV - EQS systems
proportional compensated main control valve: DANFOSS PVG32
stabilizers control valve: WALVOIL SD5
multifunction radio remote control with emergency stop button: SCANRECO
auxiliary manual controls at the column side
high pressure oil filter
centralized greasing system
oil cooler
power supply voltage: 24V DC
crane mounting bolts M39x3
variable displacement piston pump, 4 holes-ISO (90 cm³ - 350 bar)
additional crossbeam: hydraulic opening, adjustable short cylinder, spread: 6,90 m
solenoid on regenerative valve

NET PRICE EX WORKS: € 160.000,00

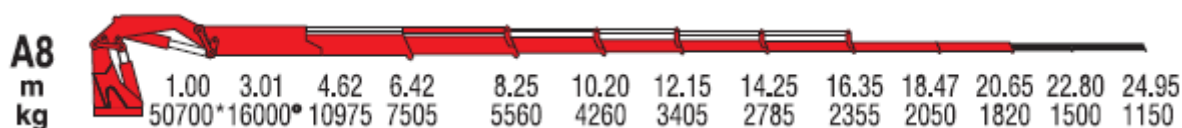

- **TERMS OF DELIVERY:** 18 WEEKS FROM ORDER CONFIRMATION
- **TERMS OF PAYMENT:** USUAL
- **OFFER VALIDITY:** 30 DAYS
- **OFFER DATE:** 15 September 2026
- **INTERNAL REF.** UTPE