
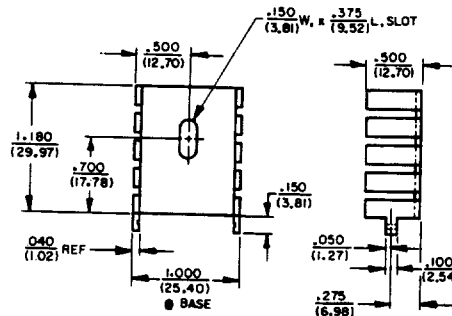


6230

- Vertical mount heat sink for TO-220.
- Integral, scored mounting tabs are centered on bottom fins for added stability.

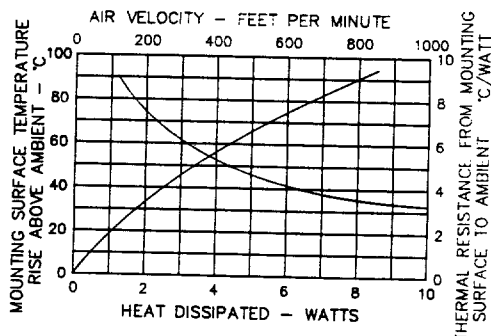




Note: Material thickness on the 6230B-TT and 6230D is .025 (.64).

Model	Material	Weight (lbs./grams)
6230B	Aluminum	.0069 (3.13)
6230B-TT	Copper	.0200 (9.07)
6230D	Copper	.0200 (9.07)

6021/6221




- Stake-on, solderable tab heat sinks for TO-220.
- Low cost alternative to tinned-tab version.

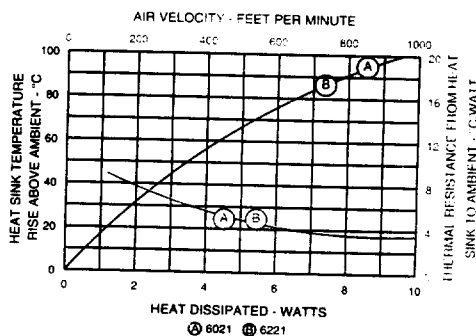

Note: Tolerances ±.017 (.43) unless otherwise specified.

Recommended Hole Pattern

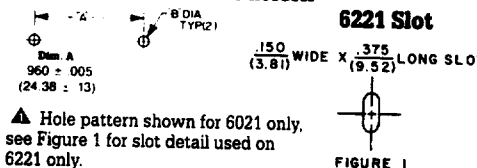

Note: Hole pattern shown for 6021 only, see Figure 1 for slot detail used on 6221 only.




FIGURE 1

U.S. Patent No. D.260,388

7019



- High performance heat sink for TO-220.
- Vertically mounted with solderable mounting tabs.
- Horizontally mounted with solderable studs or nuts.

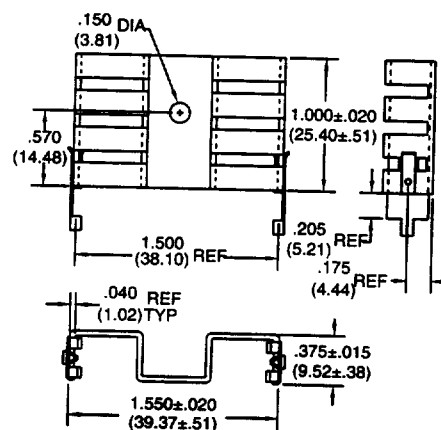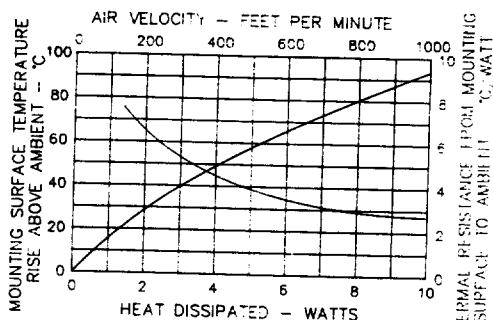

Note: Tolerances ±.010 (.25) unless otherwise specified.

Model	Weight (lbs./grams)
7019B	.006 (2.72)
7019B-MT	.006 (2.72)



6030, ML8



Model	Material	R_{θ} (°C/W)
6030B	Al	12.5
6030PB	Al	12.5
ML8*	Al	12.5

Model	Material	R_{θ} (°C/W)
6030B-TT	Cu	12.5
6030D	Cu	12.5

*Fins on the ML8 are the twisted vane configuration.

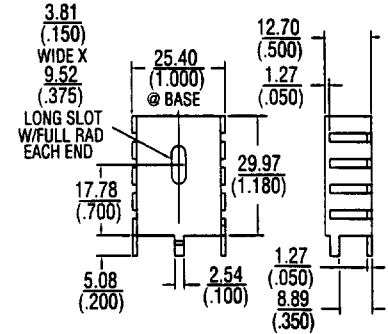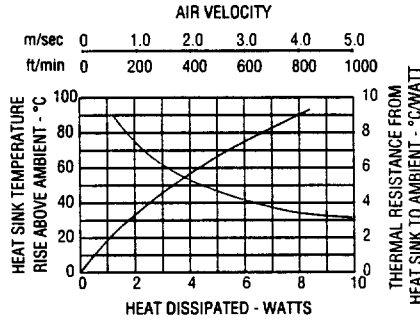

6021, 6221





Model	Dim. A mm (inches)	Dim. B mm (inches)	Dim. C mm (inches)	R_{θ} (°C/W)
6021PB	2.21±.13 (.087±.005)	10.16 (.400)	1.78 (.070)	12.5
6221PB	3.18±.13 (.125±.005)	6.99 (.275)	2.54 (.100)	12.5

U.S. Patent No. D.260,388



▲ 6021PB

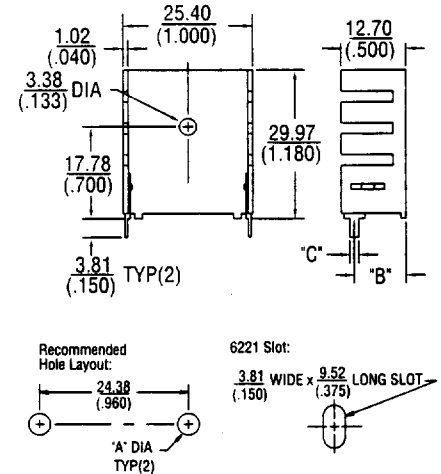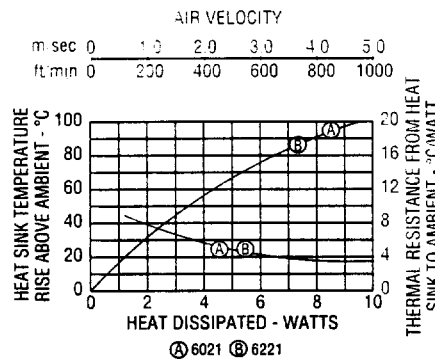

▲ Hole pattern shown for 6021 only. See Figure 1 for slot detail used on 6221 only.

▲ FIGURE 1

TV65, TV71



Model	R_{θ} (°C/W)
TV65	13.5
TV71	13.5



▲ TV65



▲ TV71

