Precision Thick Film Chip Resistors
ERJ G : 01005, 0201
ERJ R : 0201, 0402, 0603, 0805
ERJ E : 0603, 0805, 1206, 1210, 1812, 2010, 2512

Type: **ERJ XG, 1G**
ERJ 1R, 2R, 3R, 6R
ERJ 3E, 6E, 8E, 14, 12, 1T

■ Features

- Small size and lightweight
- High reliability
  Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines
  Taping packaging available
- Suitable for both reflow and flow soldering
- RoHS compliant
- Low Resistance Tolerance
  ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Series ····· ±1 %
  ERJ1R, 2R, 3R, 6R Series ····· ±0.5 %
- Reference Standards
  IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B

■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Data Files

■ Explanation of Part Numbers

- ERJ1R, 2R, 3R, 6R Series, ±0.5 % type

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	3	R	B	D	1	0	0	2	V

Product Code
Thick Film Chip Resistors

Size, Power Rating	
Type: inch	Power R.
1R : 0201	0.05 W
2R : 0402	0.063 W
3R : 0603	0.1 W
6R : 0805	0.1 W

T.C.R. Marking	
Code	T.C.R.
H	±50×10^{-6}/°C (1R, 2R)
B	±50×10^{-6}/°C (3R, 6R)
K	±100×10^{-6}/°C (2R)
E	±100×10^{-6}/°C (3R, 6R)

Resistance Tolerance	
Code	Tolerance
D	±0.5 %

Packaging Methods		
Code	Packaging	Type
C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1R
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2R
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3R ERJ6R

Resistance Value
The first three digits are significant figures of resistance and the last one denotes number of zeros following. Example: 1002→10 kΩ

● ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Series, ±1 % type

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	8	E	N	F	1	0	0	2	V

Product Code
Thick Film Chip Resistors

Size, Power Rating	
Type : inch	Power R.
XGN : 01005	0.031 W
1GN : 0201	0.05 W
2RK : 0402	0.1 W
3EK : 0603	0.1 W
6EN : 0805	0.125 W
8EN : 1206	0.25 W
14N : 1210	0.5 W
12N : 1812	0.75 W
12S : 2010	0.75 W
1TN : 2512	1 W

Resistance Tolerance	
Code	Tolerance
F	±1 %

Resistance Value
The first three digits are significant figures of resistance and the last one denotes number of zeros following. Decimal point is expressed by "R". Example : 1002 → 10 kΩ

Packaging Methods		
Code	Packaging	Type
Y	Pressed Carrier Taping 2 mm pitch, 20,000 pcs.	ERJXGN
C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1GN
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2RK
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3EK ERJ6EN ERJ8EN
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ14N ERJ12N ERJ12S
	Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJ1TN

■ Construction

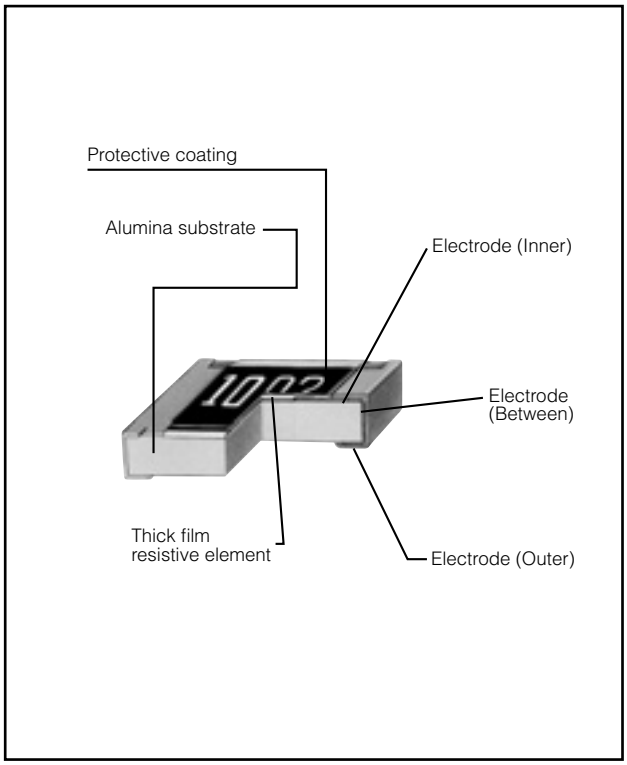

■ Dimensions in mm (not to scale)

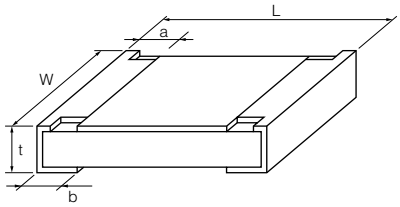

Type (inch size)	Dimensions (mm) L	W	a	b	t	Mass (Weight) [g/1000 pcs.]
ERJXG (01005)	$0.40^{\pm0.02}$	$0.20^{\pm0.02}$	$0.10^{\pm0.03}$	$0.10^{\pm0.03}$	$0.13^{\pm0.02}$	0.04
ERJ1G, 1R (0201)	$0.60^{\pm0.03}$	$0.30^{\pm0.03}$	$0.10^{\pm0.05}$	$0.15^{\pm0.05}$	$0.23^{\pm0.03}$	0.15
ERJ2R□ (0402)	$1.00^{\pm0.05}$	$0.50^{\pm0.05}$	$0.20^{\pm0.10}$	$0.25^{\pm0.05}$	$0.35^{\pm0.05}$	0.8
ERJ3R□ ERJ3EK (0603)	$1.60^{\pm0.15}$	$0.80^{+0.15}_{-0.05}$	$0.30^{\pm0.20}$	$0.30^{\pm0.15}$	$0.45^{\pm0.10}$	2
ERJ6R□ ERJ6EN (0805)	$2.00^{\pm0.20}$	$1.25^{\pm0.10}$	$0.40^{\pm0.20}$	$0.40^{\pm0.20}$	$0.60^{\pm0.10}$	4
ERJ8EN (1206)	$3.20^{+0.05}_{-0.20}$	$1.60^{+0.05}_{-0.15}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	10
ERJ14N (1210)	$3.20^{\pm0.20}$	$2.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	16
ERJ12N (1812)	$4.50^{\pm0.20}$	$3.20^{\pm0.20}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	27
ERJ12S (2010)	$5.00^{\pm0.20}$	$2.50^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.10}$	27
ERJ1TN (2512)	$6.40^{\pm0.20}$	$3.20^{\pm0.20}$	$0.65^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.10}$	45

■ Ratings

<±0.5 %>

Type (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage(1) (V)	Maximum Overload Voltage(2) (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10⁻⁶/°C)	Category Temperature Range (°C)
ERJ1RH (0201)	0.05	15	30	±0.5	1 k to 1 M (E24, E96)	±50	−55 to +125
ERJ2RH (0402)	0.063	50	100	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ2RK (0402)	0.063	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125
ERJ3RB (0603)	0.1	50	100	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ3RE (0603)	0.1	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125
ERJ6RB (0805)	0.1	150	200	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ6RE (0805)	0.1	150	200	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125

<±1 %>

Type (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage(1) (V)	Maximum Overload Voltage(2) (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10⁻⁶/°C)	Category Temperature Range (°C)
ERJXGN (01005)	0.031	15	30	±1	10 to 1 M (E24, E96)	<100 Ω : ±300 100 Ω ≦ : ±200	−55 to +125
ERJ1GN (0201)	0.05	25	50	±1	10 to 1 M(3) (E24, E96)	±200	−55 to +125
ERJ2RK (0402)	0.1	50	100	±1	10 to 1 M(3) (E24, E96)	±100	−55 to +155
ERJ3EK (0603)	0.1	75	150	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ6EN (0805)	0.125	150	200	±1	10 to 2.2 M (E24, E96)	±100	−55 to +155
ERJ8EN (1206)	0.25	200	400	±1	10 to 2.2 M (E24, E96)	±100	−55 to +155
ERJ14N (1210)	0.5	200	400	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ12N (1812)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ12S (2010)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ1TN (2512)	1	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from RCWV=$\sqrt{\text{Power Rating} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.
(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from SOTV=2.5 (Only ERJ2RK ±1% =2.0) × Power Rating or max. Overload Voltage listed above whichever less.
(3) Please contact us when you need a type with a resistance of less than 10 Ω.

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.