



**ENGINEERED TO ENDURE.
BUILT TO PERFORM.**

High Performance Refractory Solutions
for Steel, Foundry & Industrial Applications

PRODUCT BROCHURE

Our Wide Range of
Refractory Solutions



+ 91 9000067700
+ 91 7305028859



sales@agnimithra.in



We Work, Spectrum Tower, Mindspace, Chincholi
Bunder Road, Off Link Road, Malad West
Mumbai - 400064

Dealers of all kind of Refractories and Industrial Oils

Our Wide Range of Basic Monolithic Refractories

At Mumbai we have a state-of-the-art production facility established under efficient leadership of well-experienced refractory specialists. The vision is to provide best quality Basic Monolithic Refractory products to Steel and Foundry Industry for prolonged life to Valuable Furnace and Other Equipment.

Mumbai is the Origin of Magnesite in India and taking Advantage of our strategic location sourcing India's finest quality Magnesite & Dunite ensures outstanding quality to our products. Along with imported raw materials from our own Factories in China from SONGMAG & high grade additives we, also manufacture refractory materials on the specifications required by the clients application customized.



Basic Spray Mass

Basic spray masses are made from the finest raw materials and high-quality additives to deliver excellent anti-corrosion and anti-erosion properties, enabling higher tundish sequences. They serve as the main working lining for tundish bottom and side walls, with minimal rebound loss and smooth deskulling.

PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Service Limit °C
IMR / SM 62	62 (±1)	20.00	1600
IMR / SM 65	65 (±1)	21.00	1600
IMR / SM 70	70 (±1)	17.00	1600
IMR / SM 75	75 (±1)	14.00	1600
IMR / SM 80	80 (±1)	9.00	1650
IMR / SM 85	85 (±1)	5.00	1650
IMR / SM 87	87 (±1)	4.00	1650



Grading : 0-0.5 mm (Max) | Setting : Chemical

Dry Vibro Mass



We manufacture a range of heat set Dry Vibro Basic Masses which are high refractory materials installed in dry form into bottom & wall of Tundish for continuous casting & behind Tundish Board.

The advantage of the dry material is the very quick & quite simple installation enabling greater mobility & productivity shorter cycle of drying & sintering. Deskulling is a safe and quick process.

PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Grading in mm (Max)	Service Limit °C
IMR / DV 75	75 (±1)	14.00	0-1	1650
IMR / DV 80	80 (±1)	12.00	0-1	1650

Setting : Chemical

Magnesite Gunning Mass

Magnesite Gunning Mass is manufactured from high quality Dead Burnt Magnesite having higher MgO content blended along with appropriate binders. It is used in the steel industry for repair of Electric Arc Furnace, Basic Oxygen Furnace, RH Degasser & Ladle Furnace.

It is used as new lining material as well as for repairing of worn-out lining. It is possible to repair the refractory lining in hot condition by gunning in difficult areas with no former/shuttering & saves down time.



PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Grading in mm (Max)	Service Limit °C
IMR/MGUN	82.00	7.00	0-3.5	1700
IMR/SUPER GUN	85.00	5.00	0-3.5	1700
IMR/SPECIAL GUN	87.00	4.00	0-3.5	1750

Setting : Chemical



Magnesite Ramming Mass

Magnesite Ramming Mass contains high magnesia aggregates & other chemical binders to achieve the desired sintering characteristics., widely used in Induction & Arc furnace etc.

It is suitable for production of high-quality alloy, mild & low alloy steel & used in repair of Tap Hole in BOF, Ramming for EAF Hearth, EOF as well.

PRODUCTS	MgO % (Min)	SiO ₂ % (Max)	Grading mm (Max)	Service Limit °C
IMR/RAM 70	70.00	12.00	0-5	1750
IMR/RAM 84	84.00	5.00	0-5	1750
IMR/RAM 85	85.00	4.00	0-5	1750
IMR/SUPER RAM	94.00	1.50	0-5	1750

Packing : 50 Kg bags | Setting : Chemical

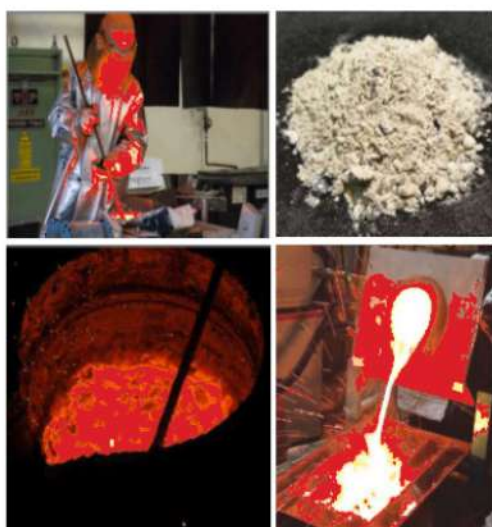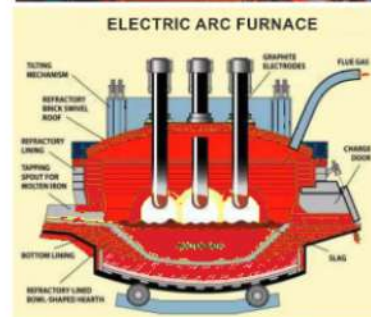

Induction Furnace Ramming Mass

Induction furnace ramming mass is a refractory material used to create the lining of the furnace. It is a granular mixture of minerals like magnesite or alumina of extremely high purity combined with binders and additives chosen based on the furnace's capacity and the type of metal being melted to optimize performance.

Properties

- ▶ High thermal stability
- ▶ Corrosion resistance
- ▶ Wear resistance.

PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Cr ₂ O ₃ %	Grading mm (Max)	Service Limit °C
INDRAM-C	75.00	6.00	5.00	0-5	1750
IND PATCH-C	75.00	6.00	5.00	0-5	1750

Packing : 50 Kg bags | Setting : Chemical

Neutral Ramming Mass

Neutral ramming mass is a refractory material used to line the inside of high-temperature induction furnaces used in steelmaking. It is designed to be non-reactive with both acidic and basic slags produced during melting processes.

Properties

- ▶ Extending furnace life
- ▶ Reducing metal contamination
- ▶ Cleaner steel output
- ▶ Excellent thermal stability for intermittent operations
- ▶ Mechanical strength,
- ▶ High erosion resistance.


PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Al ₂ O ₃ %	Fe ₂ O ₃ %	Grain Size (mm)	Service Limit °C
INDRAM- NR	11.00	0.60	85.00	0.20	≤8	1750

Application Area: Dry ramming material for induction furnace

Packing: 25 Kg bags



Neutral Patching Mass

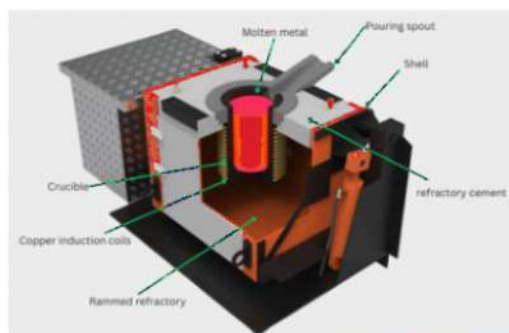

Neutral patching mass is a refractory material used to repair and patch damaged areas of induction furnace linings. It is a high-performance, chemically inert aggregate that forms a seamless, durable lining with excellent resistance to heat and erosion.

This allows for effective repairs that prevent further wear and contamination of the molten metal.

PRODUCTS	Al ₂ O ₃ %	Fe ₂ O ₃ %	Grain Size (mm)	Service Temp °C
INDPATCH-NR	81.00	0.20	≤ 1	1750

Application Area: Neutral patching mass for induction furnace
Packing : 25 Kg bags

Back Filling Mass

Backfilling mass a Forsterite-Magnesia based dry refractory mix designed to fill back-up lining voids, gaps, or cavities in the lining of industrial furnaces, ladles, and other high-temperature equipment behind AOD Vessel Walls and Bottoms.

When used as a parting layer between working and safety lining brick to absorb thermal expansion.

Application : Back Fill Mass resists metal penetration, protecting safety lining, and makes tear out of the working lining easier.




PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Grading mm (Max)	Service Limit °C
IMR/BFM 50	50.00	25.00	0-5	1700
IMR/BFM 60	60.00	22.00	0-5	1700
IMR/BFM 70	70.00	18.00	0-5	1700

Packing : 50 Kg bags | Setting : Chemical



EBT Filling Mass

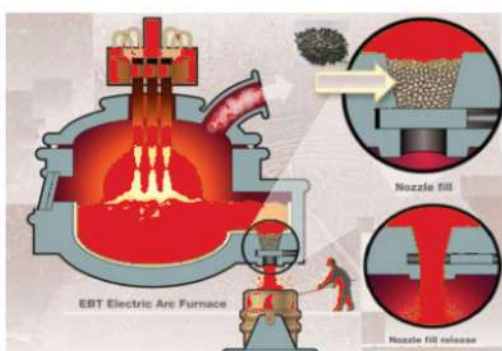

We manufacture EBT Filling Mass Dunite with Olivine & DBM customized MgO % EBT Filler which is used in Electric Arc Furnace with Eccentric Bottom Tapping for free and easier opening of tap hole.

This does not sinter under steel making temperatures and hence remains highly flowable at high temperatures, thus gets out freely, ensuring uniform stream of hot liquid.

Application:

EBT Tap hole Filler in EAF operated steel plant to achieve up to 98% Free Opening without requirement of poking or oxy lancing

PRODUCTS	MgO% (Min)	SiO ₂ % (Max)	Service Limit °C	Material Based
IMR / EBT Gr-1	45-46	39-41	1600	Dunite
IMR / EBT Gr-2	43-44	39-40	1600	Dunite
IMR / EBT Gr-3	40-42	40-42	1600	Dunite
IMR / EBT DBM	82.00	5.00	1750	DBM

Packing : 50 Kg bags / Jumbo Bags | Grading : 3-8 mm