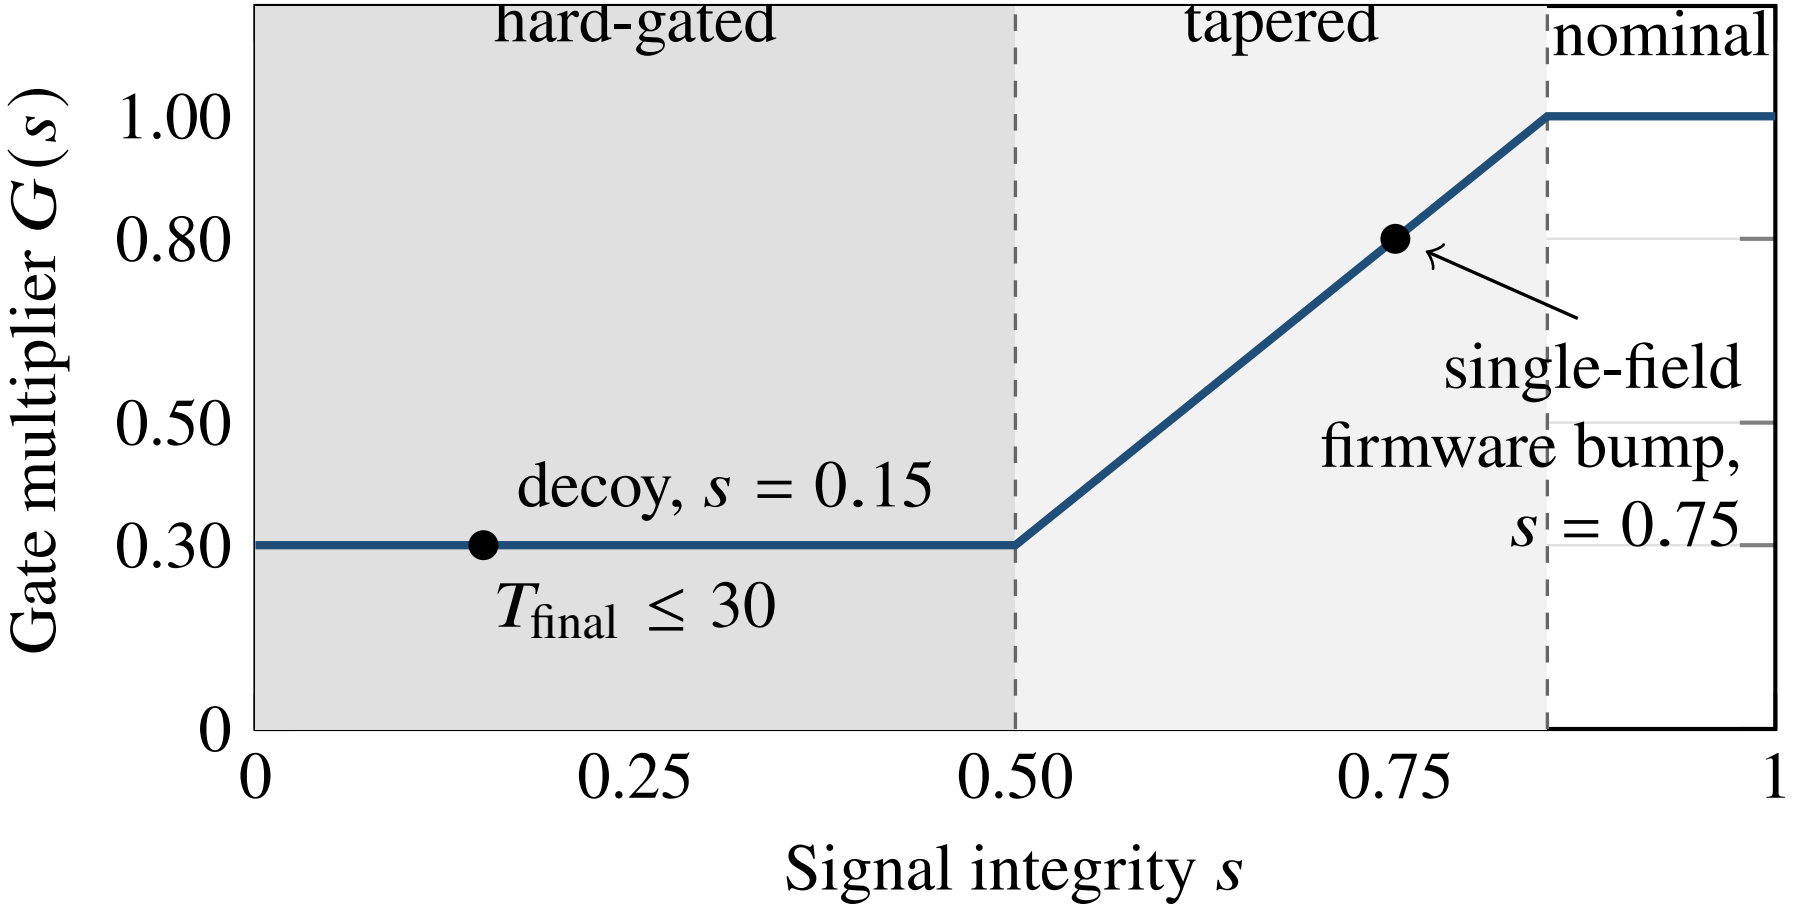

hard-gated
tapered
nominal
1.00
0.80
0.50
0.30
0
Gate multiplier $G(s)$
decoy, $s = 0.15$
$T_{\text{final}} \leq 30$
single-field
firmware bump,
$s = 0.75$
0
0.25
0.50
0.75
1
Signal integrity s