

SoliTek is a European manufacturer of top quality PV cells and modules with headquarters and production plant in Vilnius, Lithuania.

The company combines the most sophisticated technologies and 20 years of experience.



20

years product guarantee 25

84,8% max output guarantee

SoliTek Standard HC.120-B-360

Standard 120 half-cut cell module with black backsheet

Mechanical data

Cell size (mm)

Working conditions	
Maximum system voltage	DC 1500 V (TUV)
Operating temperature	-40°C / +85°C
Maximum reverse current	20 A
Maximum wind /snow load	2530/3600Pa**
IP protection level	68
Safety class	II

**Safety factor 1,5


Temperature coefficients	
Current temperature coefficient (a)	+0,049% /°C
Voltage temperature coefficient (β)	-0,33% /°C
Power temperature coefficient (δ)	-0,36% /°C
Nominal Operating Module Temperature	43±2°C

Electrical parametres			
Parameter		Unit	Value
Maximum power*	Pmax	W	360
Maximum power point voltage	Vmpp	V	33,9
Maximum power current	Impp	Α	10,62
Open circuit voltage	Voc	V	41,2
Short circuit current	Isc	Α	11,18
Efficiency	η	%	19,46

^{*}Under Standart Test Conditions (STC) of irradiance of 1000W/sq. m., spectrum AM 1.5 and cell temperature of 25°C

()	2007100
Number of cells	120 (6x20)
Front side glass	3,2 mm
Weight	20 kg
Dimensions (L x W x H)	1765x1048x35
J-box	IP68
Cable length	1,1 m
Cable cross section size	4 mm ²
Number of diodes	3
Plug-in connection	MC4 compatible
Frame	Black anodized aluminium frame

166x83

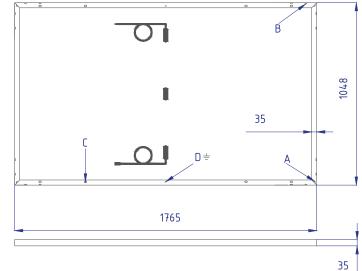

A: Drainage; B: Ventilation; C: Mounting holes; D: Earthing;















Mokslininku str. 6A, Vilnius 08412, Lithuania Tel. +370 5 263 8774 info@solitek.eu www.solitek.eu