


LE01 – Roteiro Lab 01

1. List 3 different protocols that appear in the protocol column in the unfiltered packet-listing window in step 7 above.

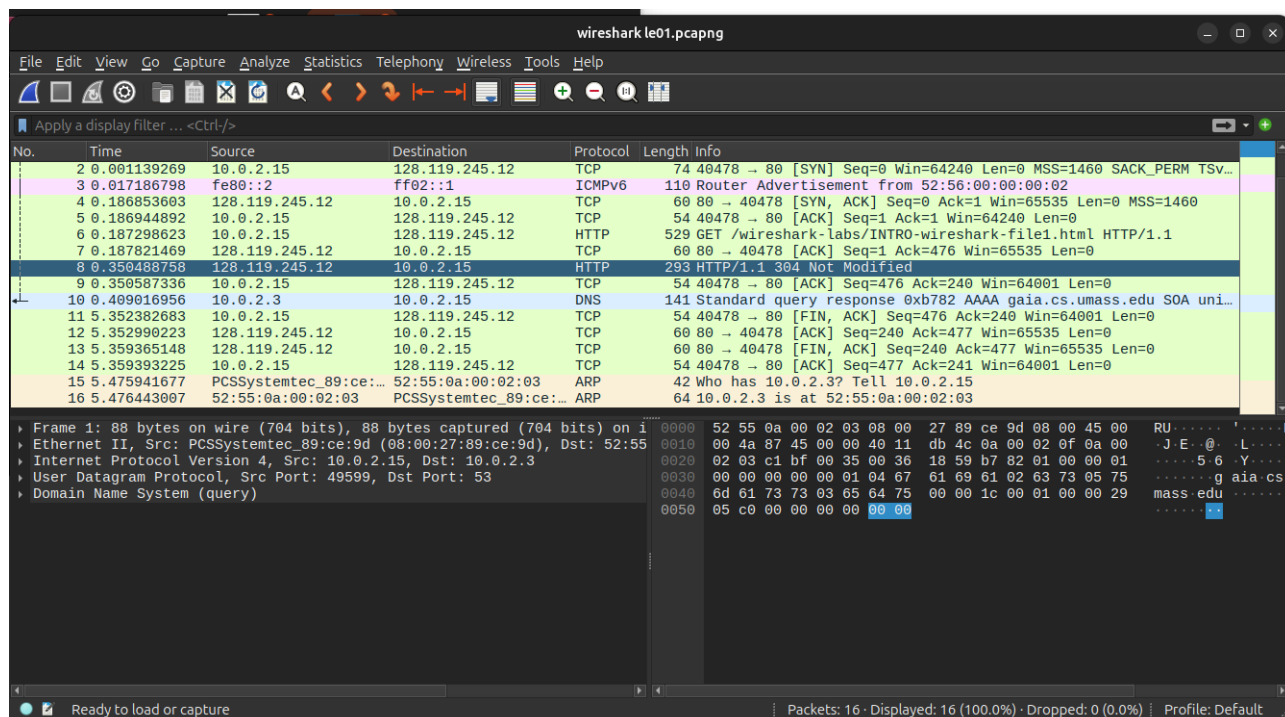

TCP, ARP e DNS

2. How long did it take from when the HTTP GET message was sent until the HTTP OK reply was received? (By default, the value of the Time column in the packet-listing window is the amount of time, in seconds, since Wireshark tracing began. To display the Time field in time-of-day format, select the Wireshark View pull down menu, then select Time Display Format, then select Time-of-day)

No.	Time	Source	Destination	Protocol	Length	Info
6	0.187298623	10.0.2.15	128.119.245.12	HTTP	529	GET /wireshark-labs/INTRO-wireshark-file1.html HTTP/1.1
8	0.350488758	128.119.245.12	10.0.2.15	HTTP	293	HTTP/1.1 304 Not Modified

$0.187298623 \text{ s} \approx 0.187 \text{ s}$. $0.350488758 \text{ s} \approx 0.35 \text{ s}$. $0.35 \text{ s} - 0.187 \text{ s} = 0.163 \text{ s}$
 $= 163 \text{ ms}$

3. What is the Internet address of the gaia.cs.umass.edu (also known as www-net.cs.umass.edu)? What is the Internet address of your computer?

Através da imagem anterior, dá para perceber que existem dois endereços, o da minha máquina virtual e o do servidor do website. Ao chamar o método GET para obter as informações do website para o meu computador, dá para perceber que o meu endereço de IP é o que está localizado no source, ou seja, o endereço 10.0.2.15, e o

do servidor é o destino, que é o IP 128.119. 245.12. Isso é confirmado quando realizo o comando “ifconfig” para obter as informações dos endereços de internet na minha máquina virtual, no qual o meu dispositivo de wifi é o enp0s3.

```
Gui@Ubuntu:~$ ifconfig
docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether 3e:5b:c3:a2:4c:71 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 31 overruns 0 carrier 0 collisions 0

enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::a00:27ff:fe89:ce9d prefixlen 64 scopeid 0x20<link>
    inet6 fd00::a00:27ff:fe89:ce9d prefixlen 64 scopeid 0x0<global>
    inet6 fd00::b10c:1717:5ec3:9be2 prefixlen 64 scopeid 0x0<global>
    ether 08:00:27:89:ce:9d txqueuelen 1000 (Ethernet)
    RX packets 3478 bytes 3649838 (3.6 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 1746 bytes 217974 (217.9 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 179 bytes 18407 (18.4 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 179 bytes 18407 (18.4 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

4. Print the two HTTP messages (GET and OK) referred to in question 2 above. To do so, select Print from the Wireshark File command menu, and select the “Selected Packet Only” and “Print as displayed” radial buttons, and then click OK.

No próximo arquivo PDF dentro da pasta ZIP. Foi realizado o print do método GET e a resposta do servidor, o OK.