

POLIÉSTER ER

TECHNICAL SPECIFICATION SHEET

DESCRIPTION:


Polyester film is a hazy and both side untreated bi-axially oriented polyester film, Film is thermally stable

APPLICATIONS:

Electrical applications (wire and cable insulation), FRP / GRP applications, General purpose use and other industrial applications

SALIENT FEATURES:

- Heat Stable Film
- Excellent Machinability
- Intermediate Haze
- Excellent Mechanical and Thermal Properties
- Excellent Mechanical and Thermal Properties

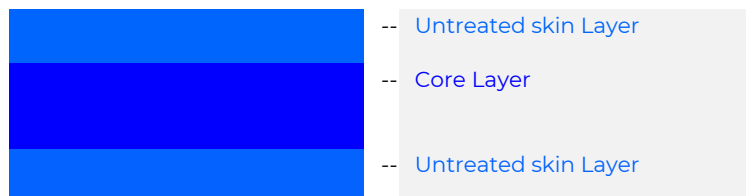

TECHNICAL DATA						
PROPERTIES			TEST METHOD	UNIT		
PHYSICAL						
Thickness			ASTM D374	Micron	19	23
			ASTM D374	Gauge	76	92
Yield			JPFTM	m²/kg	37.5	31.0
			JPFTM	in²/lb	26400.0	21800.0
OPTICAL						
Total luminous transmittance			ASTM D1003	%	88	88
Haze(Min)			ASTM D1003	%	4	4
MECHANICAL						
Tensile Strength	(MD) Min		ASTM D882	kg/cm²	2000	2000
	(MD) Min		ASTM D882	psi	28500	28500
	(TD) Min		ASTM D882	kg/cm²	1900	1900
	(TD) Min		ASTM D882	psi	27000	27000
Elongation	(MD) Min		ASTM D882	%	90	90
	(TD) Min		ASTM D882	%	90	90
Coefficient of friction(Side-A/B)	St (Max)		ASTM D1894	-	0.45	0.50
	Dy (Max)		ASTM D1894	-	0.40	0.45
THERMAL						
Shrinkage (150°C/30 min)	(MD) Max		ASTM D1204	%	2.5	2.5
	(TD) Max		ASTM D1204	%	0.4	0.4
SURFACE						
Wetting Tension			ASTM D2578	Dyne/cm	44	
ELECTRICAL						
Break Down Voltage			ASTM D-149	KV	4.5	6

TECHNICAL DATA					
PROPERTIES		TEST METHOD	UNIT		
PHYSICAL					
Thickness		ASTM D374	Micron	30	36
		ASTM D374	Gauge	120	144
Yield		JPFTM	m ² /kg	23.8	19.8
		JPFTM	in ² /lb	16700.0	13900.0
OPTICAL					
Total luminous transmittance		ASTM D1003	%	88	88
Haze(Min)		ASTM D1003	%	4	5
MECHANICAL					
Tensile Strength	(MD) Min	ASTM D882	kg/cm ²	2000	1900
	(MD) Min	ASTM D882	psi	28500	27000
	(TD) Min	ASTM D882	kg/cm ²	1900	1800
	(TD) Min	ASTM D882	psi	27000	25600
Elongation	(MD) Min	ASTM D882	%	100	100
	(TD) Min	ASTM D882	%	100	100
Coefficient of friction(Side-A/B)	St (Max)	ASTM D1894	-	0.50	0.50
	Dy (Max)	ASTM D1894	-	0.45	0.45
THERMAL					
Shrinkage (150°C/30 min)	(MD) Max	ASTM D1204	%	2.5	2.5

TECHNICAL DATA						
PROPERTIES			TEST METHOD	UNIT		
PHYSICAL						
Thickness			ASTM D374	Micron	50	75
			ASTM D374	Gauge	200	300
Yield			JPFTM	m ² /kg	14.0	9.5
			JPFTM	in ² /lb	10000.0	6680.0
OPTICAL						
Total luminous transmittance			ASTM D1003	%	88	88
Haze(Min)			ASTM D1003	%	6	5
MECHANICAL						
Tensile Strength	(MD) Min		ASTM D882	kg/cm ²	1900	1700
	(MD) Min		ASTM D882	psi	27000	24200
	(TD) Min		ASTM D882	kg/cm ²	1800	1700
	(TD) Min		ASTM D882	psi	25600	24200
Elongation	(MD) Min		ASTM D882	%	100	120
	(TD) Min		ASTM D882	%	100	100
Coefficient of friction(Side-A/B)	St (Max)		ASTM D1894	-	0.50	0.50
	Dy (Max)		ASTM D1894	-	0.45	0.45
THERMAL						
Shrinkage (150°C/30 min)	(MD) Max		ASTM D1204	%	2.5	2.5
	(TD) Max		ASTM D1204	%	0.4	1.5

TECHNICAL DATA					
PROPERTIES			TEST METHOD	UNIT	
PHYSICAL					
Thickness			ASTM D374	Micron	100 125
			ASTM D374	Gauge	400 500
Yield			JPFTM	m²/kg	7.1 5.7
			JPFTM	in²/lb	4990.0 4000.0
OPTICAL					
Total luminous transmittance			ASTM D1003	%	88 88
Haze(Min)			ASTM D1003	%	6.0 7.0
MECHANICAL					
Tensile Strength	(MD) Min		ASTM D882	kg/cm²	1700 1700
	(MD) Min		ASTM D882	psi	24200 24200
	(TD) Min		ASTM D882	kg/cm²	1700 1700
	(TD) Min		ASTM D882	psi	24200 24200
Elongation	(MD) Min		ASTM D882	%	120 120
	(TD) Min		ASTM D882	%	100 100
Coefficient of friction(Side-A/B)	St (Max)		ASTM D1894	-	0.40 0.40
	Dy (Max)		ASTM D1894	-	0.30 0.30
THERMAL					

TECHNICAL DATA						
PROPERTIES			TEST METHOD	UNIT		
PHYSICAL						
Thickness			ASTM D374	Micron	175	190
			ASTM D374	Gauge	700	760
Yield			JPFTM	m ² /kg	4.1	3.7
			JPFTM	in ² /lb	2880.0	2600.0
OPTICAL						
Total luminous transmittance			ASTM D1003	%	88	88
Haze(Min)			ASTM D1003	%	8.0	9.0
MECHANICAL						
Tensile Strength	(MD) Min		ASTM D882	kg/cm ²	1700	1700
	(MD) Min		ASTM D882	psi	24200	24200
	(TD) Min		ASTM D882	kg/cm ²	1700	1700
	(TD) Min		ASTM D882	psi	24200	24200
Elongation	(MD) Min		ASTM D882	%	120	120
	(TD) Min		ASTM D882	%	100	100
Coefficient of friction(Side-A/B)	St (Max)		ASTM D1894	-	0.40	0.40
	Dy (Max)		ASTM D1894	-	0.30	0.30
THERMAL						
	(MD) Max		ASTM D1204	%	25	25

TECHNICAL DATA				
PROPERTIES		TEST METHOD	UNIT	
PHYSICAL				
Thickness		ASTM D374	Micron	250
		ASTM D374	Gauge	1000
Yield		JPFTM	m ² /kg	2.9
		JPFTM	in ² /lb	2040.0
OPTICAL				
Total luminous transmittance		ASTM D1003	%	88
Haze(Min)		ASTM D1003	%	12.0
MECHANICAL				
Tensile Strength	(MD) Min	ASTM D882	kg/cm ²	1600
	(MD) Min	ASTM D882	psi	22800
	(TD) Min	ASTM D882	kg/cm ²	1600
	(TD) Min	ASTM D882	psi	22800
Elongation	(MD) Min	ASTM D882	%	120
	(TD) Min	ASTM D882	%	100
Coefficient of friction(Side-A/B)	St (Max)	ASTM D1894	-	0.40
	Dy (Max)	ASTM D1894	-	0.30
THERMAL				
Shrinkage (150°C/30 min)	(MD) Max	ASTM D1204	%	2.5
	(TD) Max	ASTM D1204	%	1.5
ELECTRICAL				
Break Down Voltage		ASTM D-149	KV	22