top (+z) (axes in mm from the view origin)

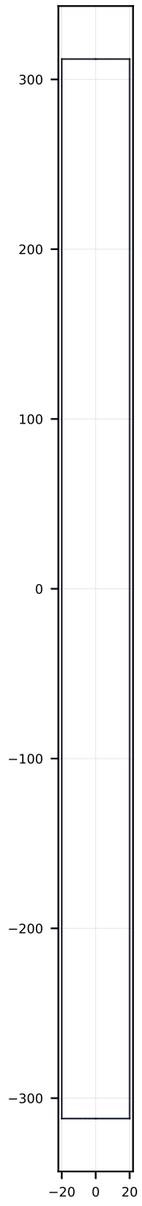

side (+x) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)

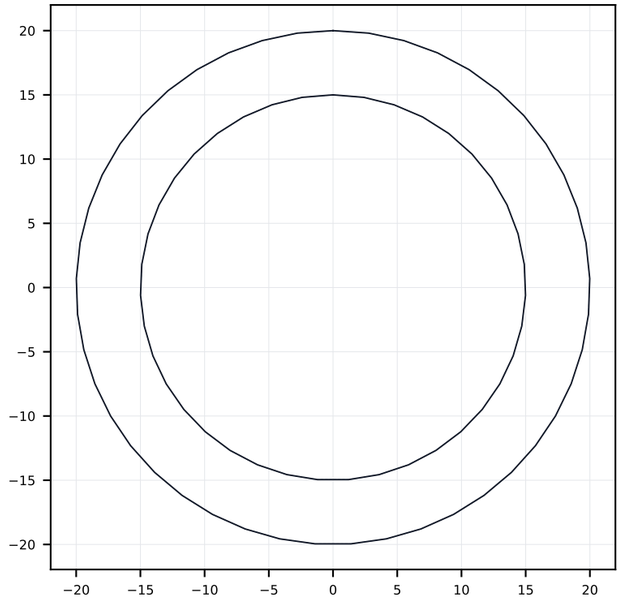

iso

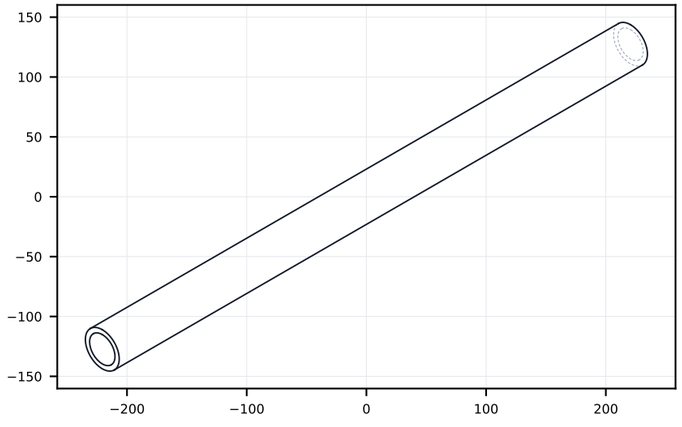

DRAWING axle
qty per robot: 1
material: roll-wrapped CFRP tube 40 x 30, high-modulus fibre (E_axial >= 150 GPa),
    mostly 0 deg + +-45
process: cut to 624 mm, ends faced
finish:
mass: 531.7 g overall: 40.0 x 624.0 x 40.0 mm (x, y, z)
note: cable slots 10 x 30 at y +-170 and +-296 (deburred, edge-sealed)
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/axle.step
view origin = bounding-box centre = robot (0.00, 0.00, 0.00)