


front (-y) (axes in mm from the view origin)

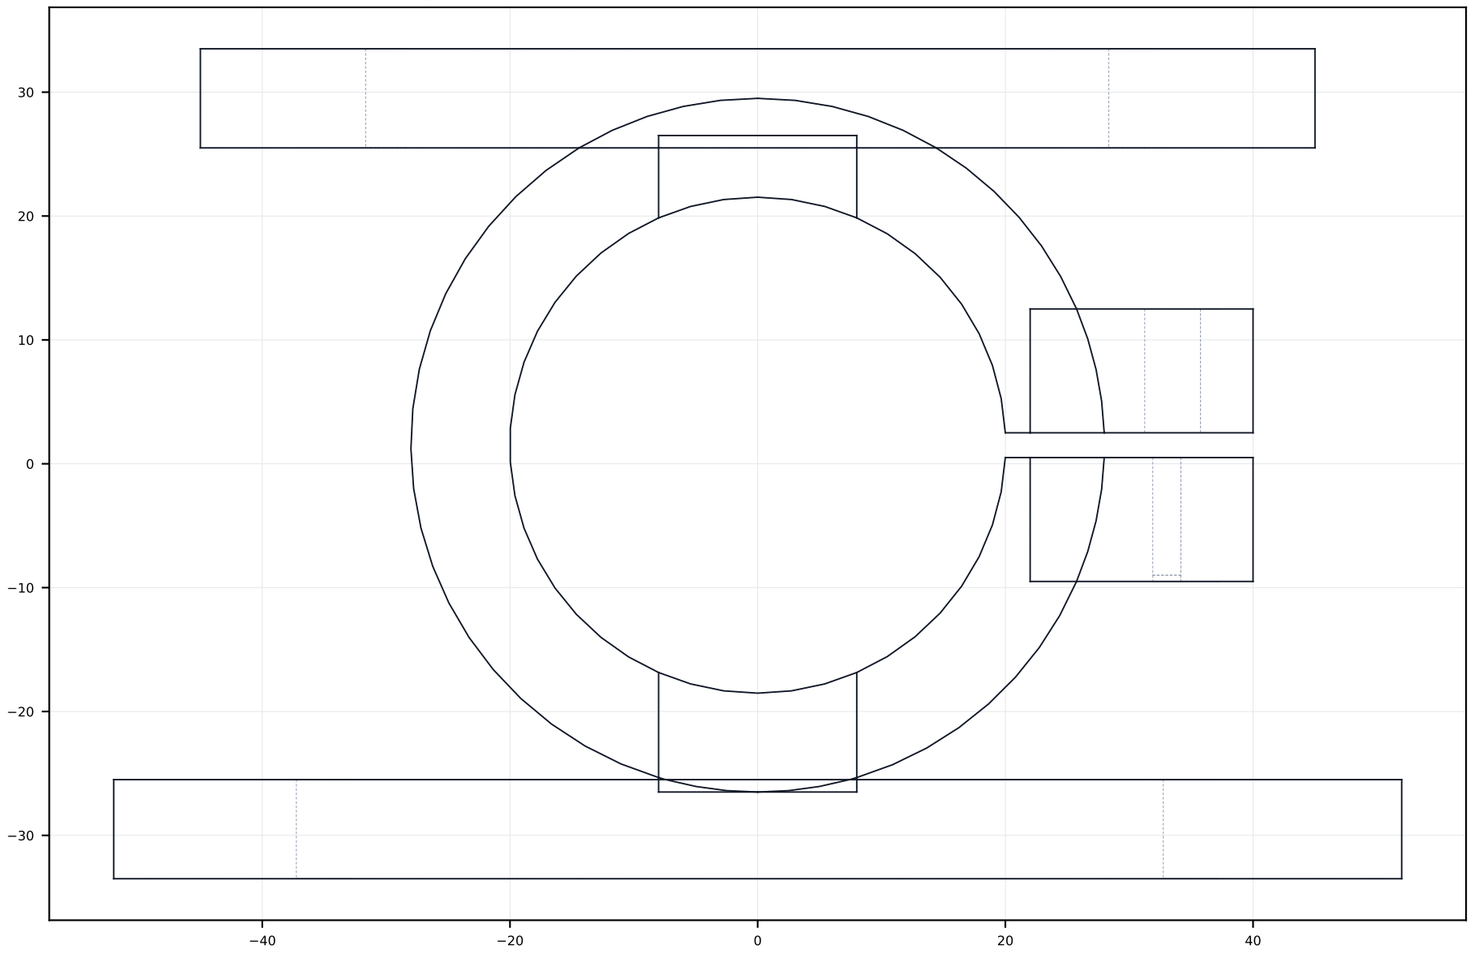


top (+z) (axes in mm from the view origin)

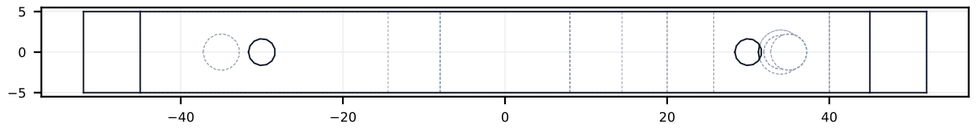

side (+x) (axes in mm from the view origin)

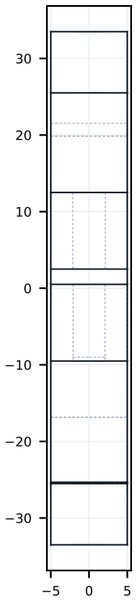

iso

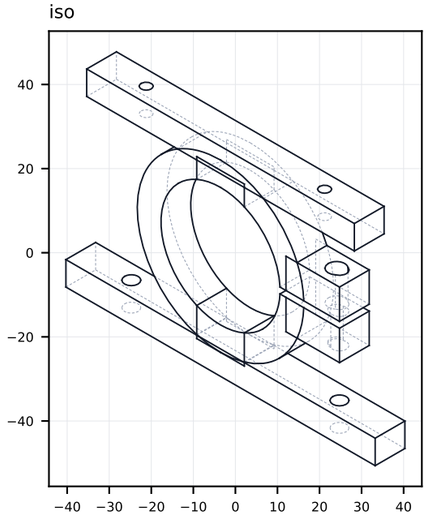

DRAWING bay_clamp
qty per robot: 4 (R-hand part = this one mirrored about XZ)
material: 6061-T6
process: CNC
finish: clear anodise
mass: 76.3 g overall: 104.0 x 10.0 x 67.0 mm (x, y, z)
note: bore 40 H7 slit clamp on the CFRP axle
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/bay_clamp.step
view origin = bounding-box centre = robot (0.00, 173.00, -1.50)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 9.4 deep (drill 3.3)	-30.00	0.00	36.50	-z
M4 tapped 9.4 deep (drill 3.3)	30.00	0.00	36.50	-z
M5 tapped 10.0 deep (drill 4.2)	34.00	0.00	12.50	-z
d4.5 through	-35.00	0.00	-25.50	-z
d4.5 through	35.00	0.00	-25.50	-z
d5.5 through	34.00	0.00	12.50	-z