top (+z) (axes in mm from the view origin)

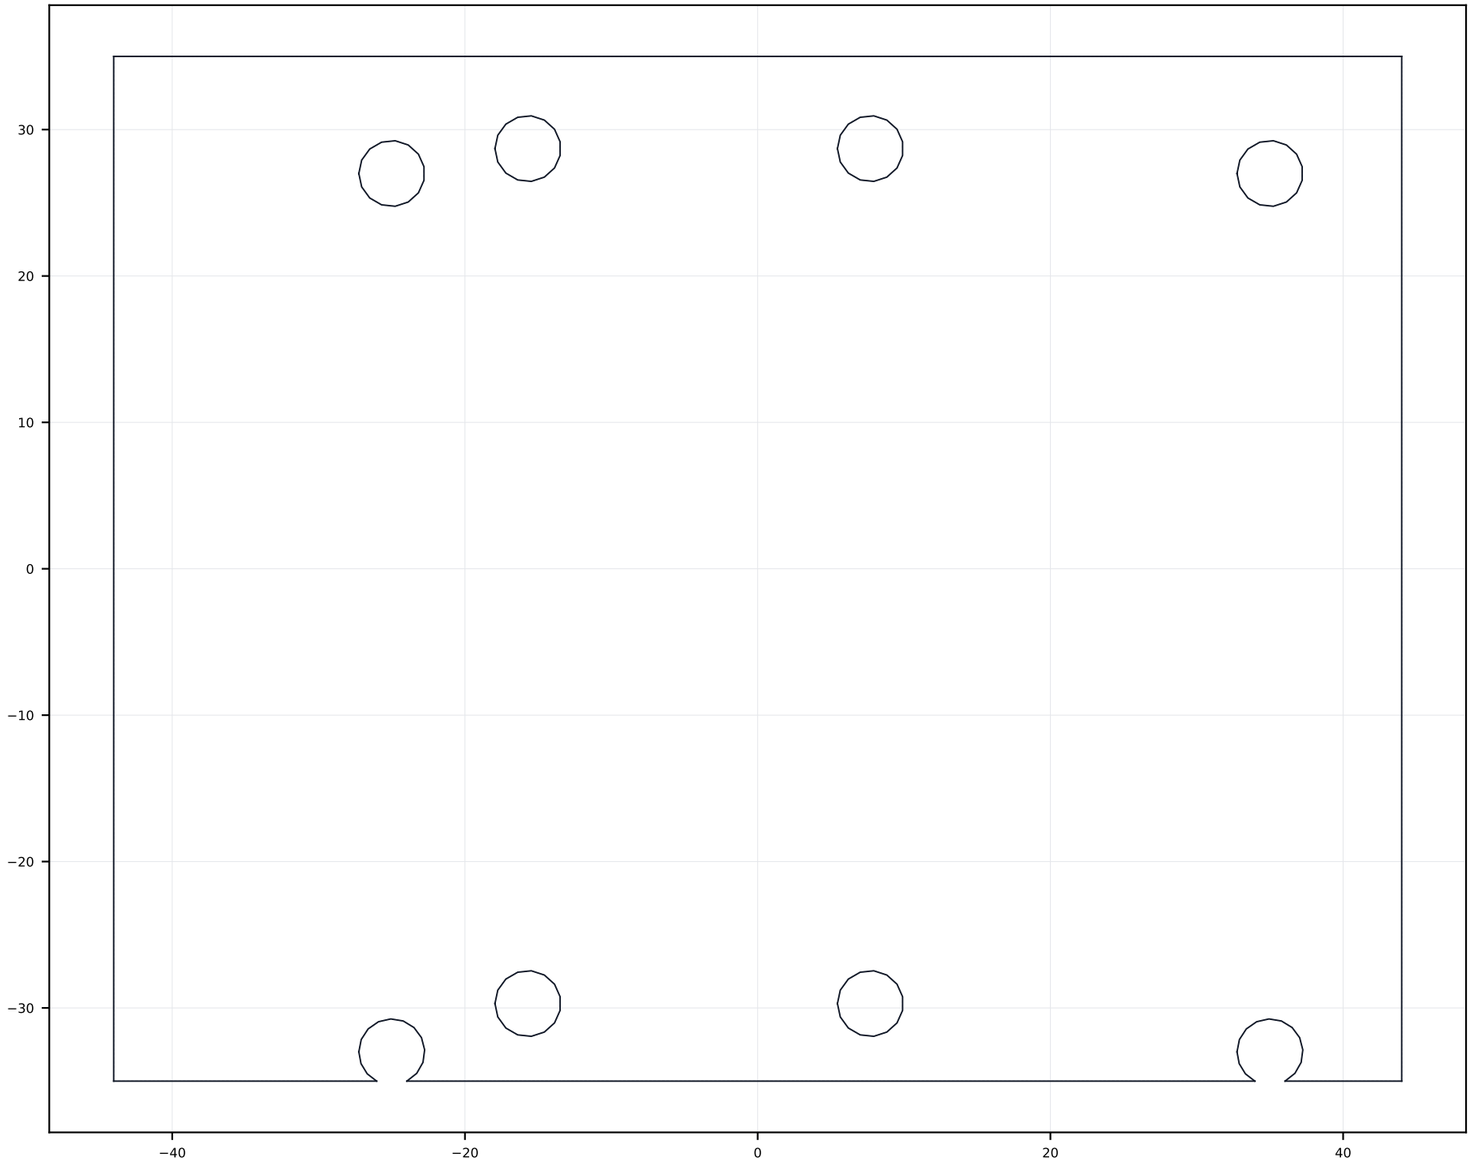

front (-y) (axes in mm from the view origin)



side (+x) (axes in mm from the view origin)



iso

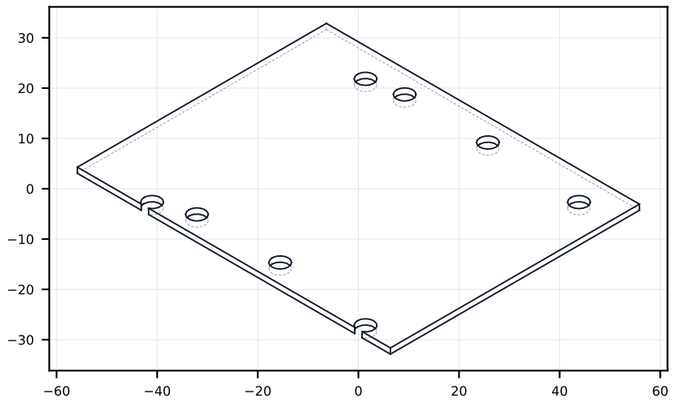

DRAWING bay_mezzanine
qty per robot: 1
material: 5052-H32 1.5 mm
process: laser cut, PEM nuts (M3)
finish:
mass: 24.4 g overall: 88.0 x 70.0 x 1.5 mm (x, y, z)
note: cable tie slots along the edges; USB hub on PEM nuts
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/bay_mezzanine.step
view origin = bounding-box centre = robot (-5.00, -218.00, -54.75)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d4.5 for M3 PEM nut	-15.70	-29.70	7.35	-z
d4.5 for M3 PEM nut	-15.70	28.70	7.35	-z
d4.5 for M3 PEM nut	7.70	-29.70	7.35	-z
d4.5 for M3 PEM nut	7.70	28.70	7.35	-z
d4.5 through	-25.00	-33.00	0.75	-z
d4.5 through	-25.00	27.00	0.75	-z
d4.5 through	35.00	-33.00	0.75	-z
d4.5 through	35.00	27.00	0.75	-z