front (-y) (axes in mm from the view origin)

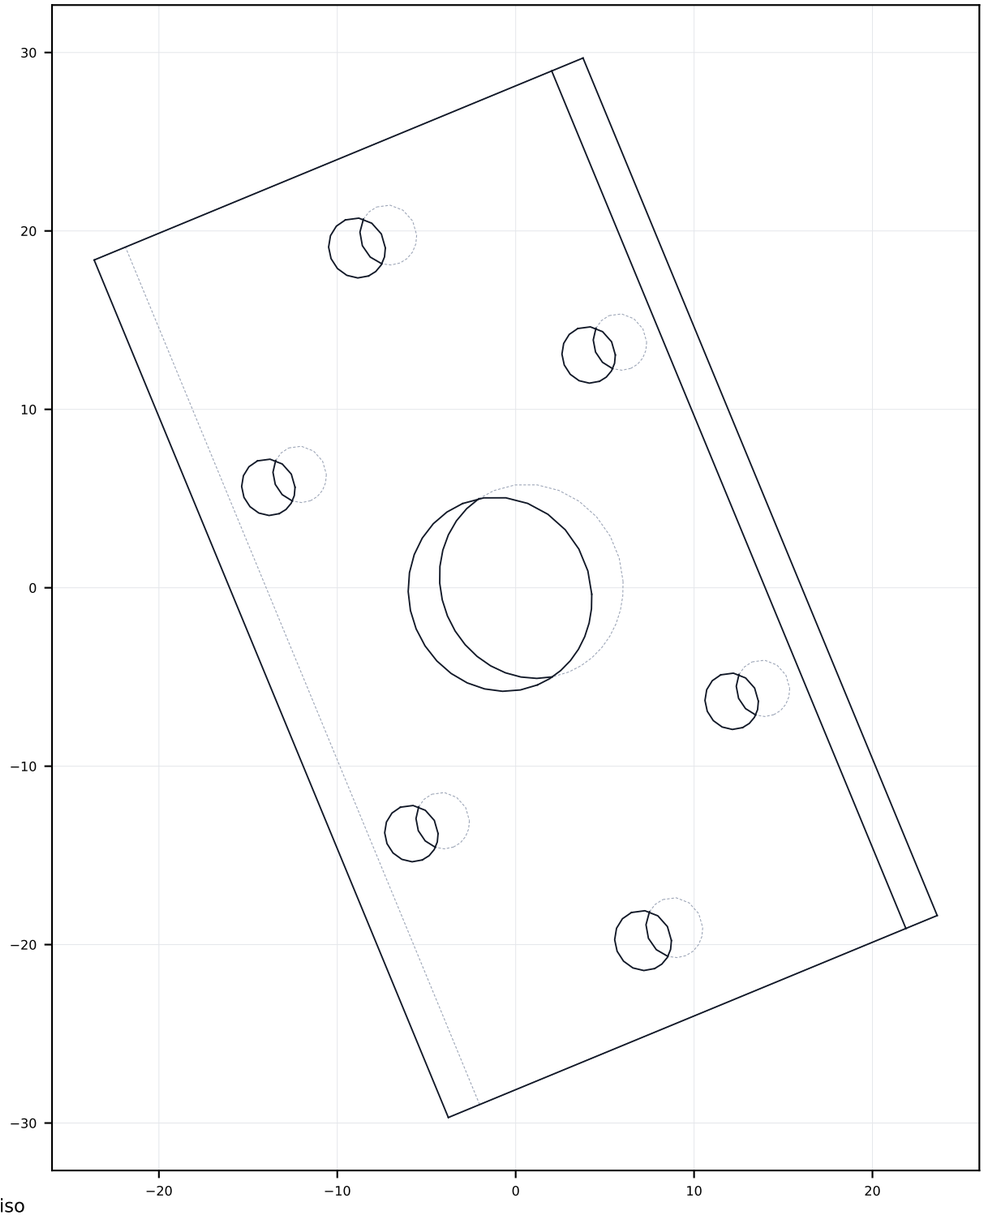

side (+x) (axes in mm from the view origin)

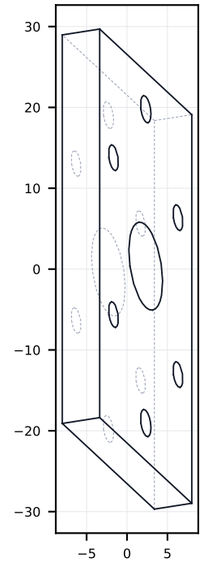

top (+z) (axes in mm from the view origin)

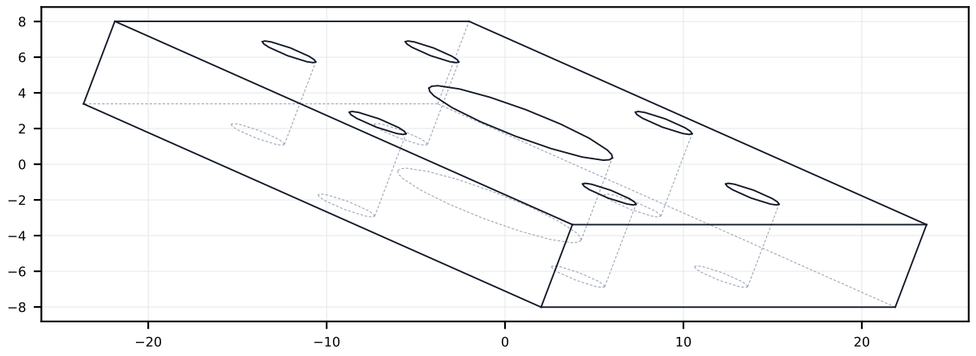

iso

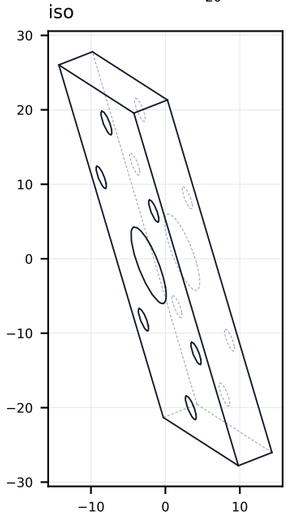

DRAWING cam_holder
qty per robot: 6 (R-hand part = this one mirrored about XZ)
material: PA12
process: MJF print
finish:
mass: 7.1 g overall: 47.3 x 16.0 x 59.4 mm (x, y, z)
note: 2 x M3 into shield inserts; camera on 4 x M2 into M2 inserts
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/cam_holder.step
view origin = bounding-box centre = robot (100.92, 355.96, 41.69)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d3.2 x 5.8 for M2 heat-set insert	-16.01	-3.97	4.75	+y
d3.2 x 5.8 for M2 heat-set insert	-7.99	-3.97	-14.66	+y
d3.2 x 5.8 for M2 heat-set insert	1.95	-11.94	12.17	+y
d3.2 x 5.8 for M2 heat-set insert	9.97	-11.94	-7.24	+y
d3.4 through	-8.90	-2.31	19.05	+y
d3.4 through	7.14	-2.31	-19.77	+y