


side (+x) (axes in mm from the view origin)

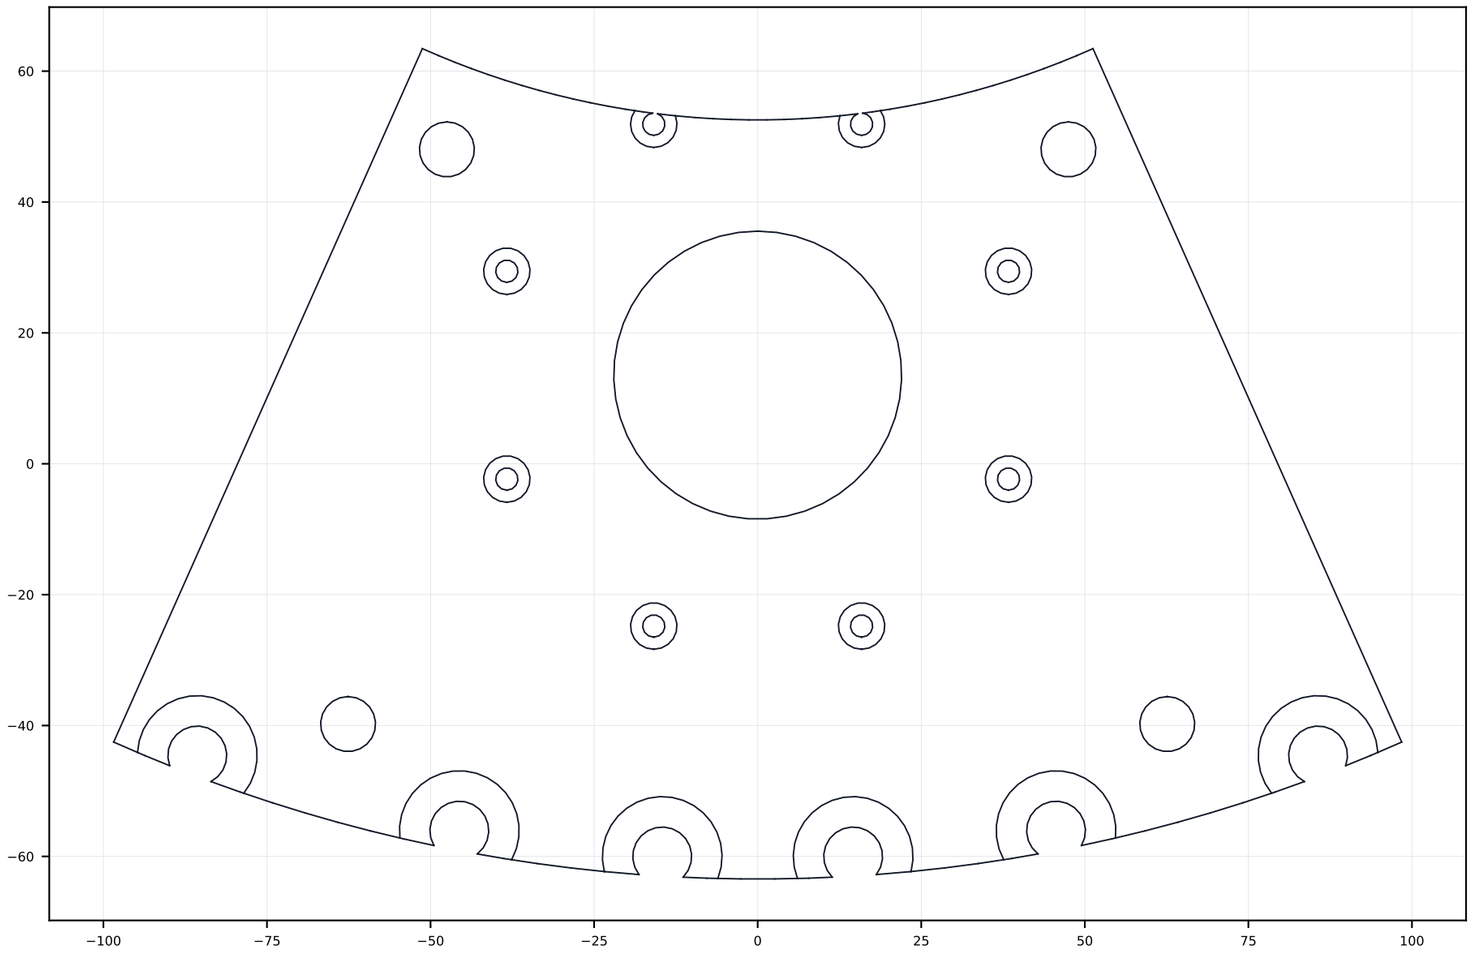


top (+z) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)



iso

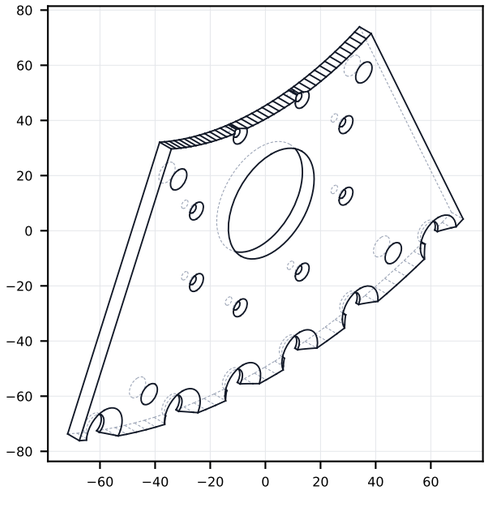

DRAWING carriage
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6 plate 6 mm
process: waterjet + CNC
finish:
mass: 249.8 g overall: 6.0 x 196.9 x 126.9 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/carriage.step
view origin = bounding-box centre = robot (65.00, 0.00, -178.55)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d3.4 through, csk 90 deg	3.00	-38.34	-2.33	-x
d3.4 through, csk 90 deg	3.00	-38.34	29.43	-x
d3.4 through, csk 90 deg	3.00	-15.88	-24.79	-x
d3.4 through, csk 90 deg	3.00	-15.88	51.89	-x
d3.4 through, csk 90 deg	3.00	15.88	-24.79	-x
d3.4 through, csk 90 deg	3.00	15.88	51.89	-x
d3.4 through, csk 90 deg	3.00	38.34	-2.33	-x
d3.4 through, csk 90 deg	3.00	38.34	29.43	-x
d9.0 through, csk 90 deg	3.00	-85.65	-44.58	-x
d9.0 through, csk 90 deg	3.00	-45.60	-56.06	-x
d9.0 through, csk 90 deg	3.00	-14.59	-60.01	-x
d9.0 through, csk 90 deg	3.00	14.59	-60.01	-x
d9.0 through, csk 90 deg	3.00	45.60	-56.06	-x
d9.0 through, csk 90 deg	3.00	85.65	-44.58	-x