side (+x) (axes in mm from the view origin)

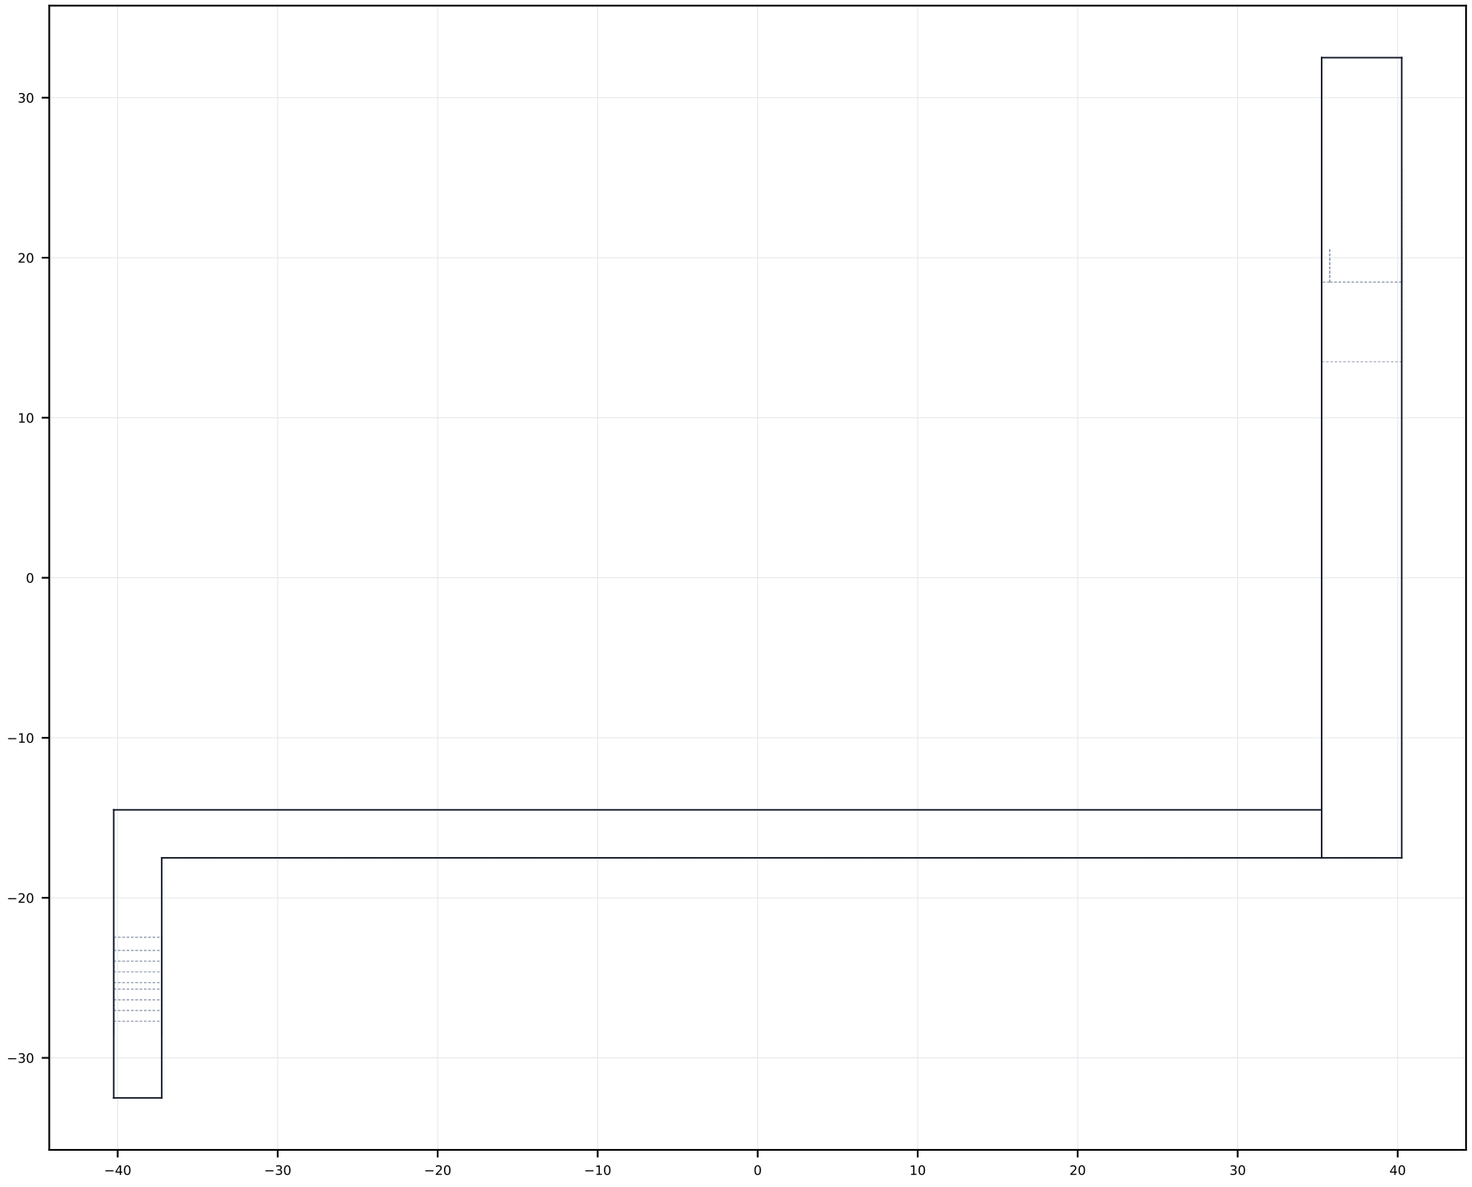

top (+z) (axes in mm from the view origin)

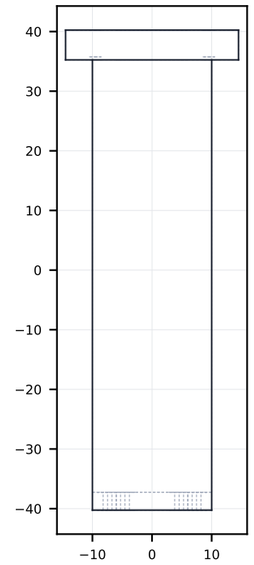

front (-y) (axes in mm from the view origin)

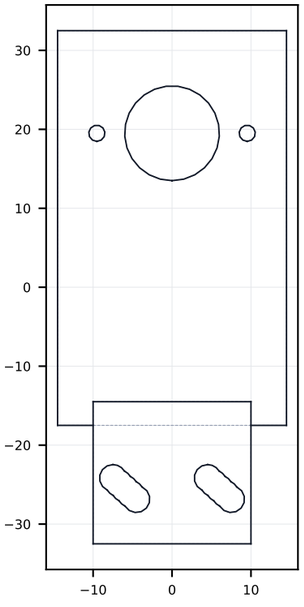

iso

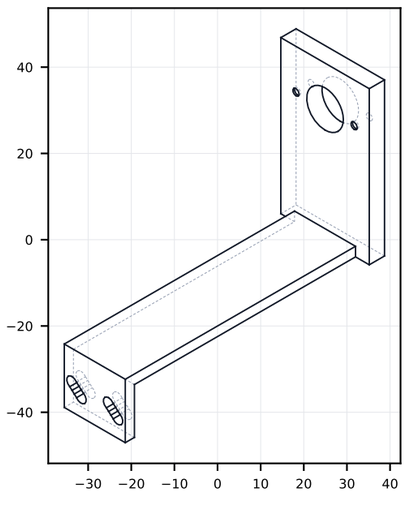

DRAWING drive_enc_bracket
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6
process: CNC from 6 mm plate (or 3 mm bent L + 5 mm bridge)
finish:
mass: 32.3 g overall: 29.0 x 80.5 x 65.0 mm (x, y, z)
note: M2.5 tapped through in the bridge; foot holes slotted +-2 mm with the motor
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/drive_enc_bracket.step
view origin = bounding-box centre = robot (130.05, 124.25, -136.60)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M2.5 tapped 5.0 deep (drill 2.05)	-9.53	41.75	19.50	-y
M2.5 tapped 5.0 deep (drill 2.05)	9.52	41.75	19.50	-y
d3.4 through	-6.00	-37.25	-25.50	-y
d3.4 through	6.00	-37.25	-25.50	-y