top (+z) (axes in mm from the view origin)

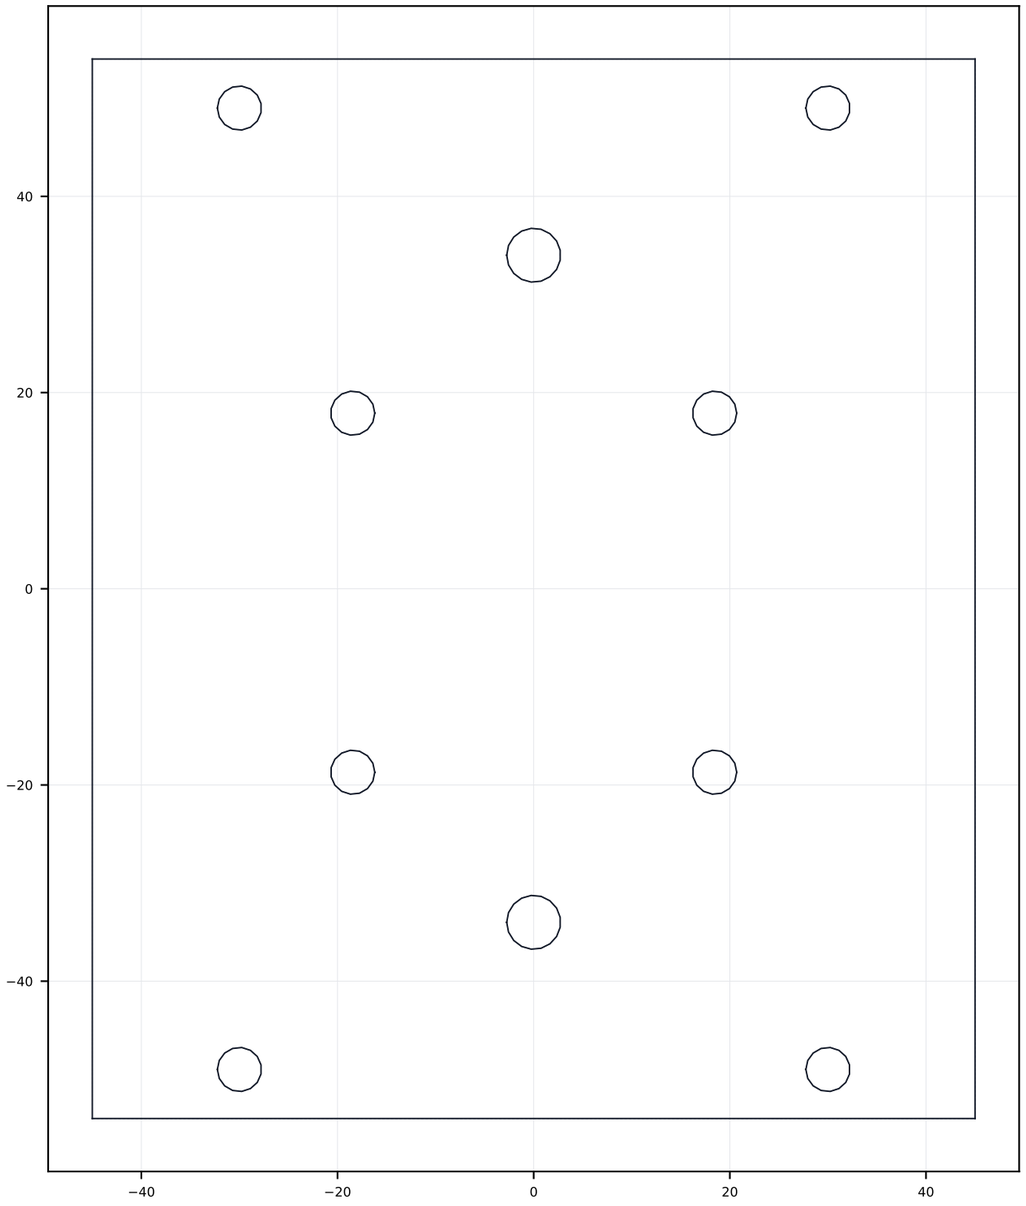

side (+x) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)



iso

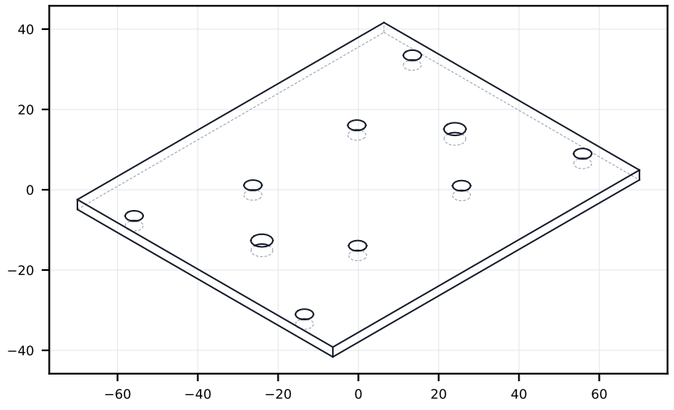

DRAWING gnss_plate
qty per robot: 1
material: 5052-H32 3 mm
process: laser cut, PEM nuts
finish:
mass: 77.3 g overall: 90.0 x 108.0 x 3.0 mm (x, y, z)
note: 120 mm ground plane for the antenna
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/gnss_plate.step
view origin = bounding-box centre = robot (0.00, 222.00, 33.50)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d4.5 for M3 PEM nut	-18.45	-18.70	-11.00	+z
d4.5 for M3 PEM nut	-18.45	17.90	-11.00	+z
d4.5 for M3 PEM nut	18.45	-18.70	-11.00	+z
d4.5 for M3 PEM nut	18.45	17.90	-11.00	+z
d4.5 through	-30.00	-49.00	1.50	-z
d4.5 through	-30.00	49.00	1.50	-z
d4.5 through	30.00	-49.00	1.50	-z
d4.5 through	30.00	49.00	1.50	-z
d5.5 for M4 PEM nut	0.00	-34.00	7.50	-z
d5.5 for M4 PEM nut	0.00	34.00	7.50	-z