


front (-y) (axes in mm from the view origin)

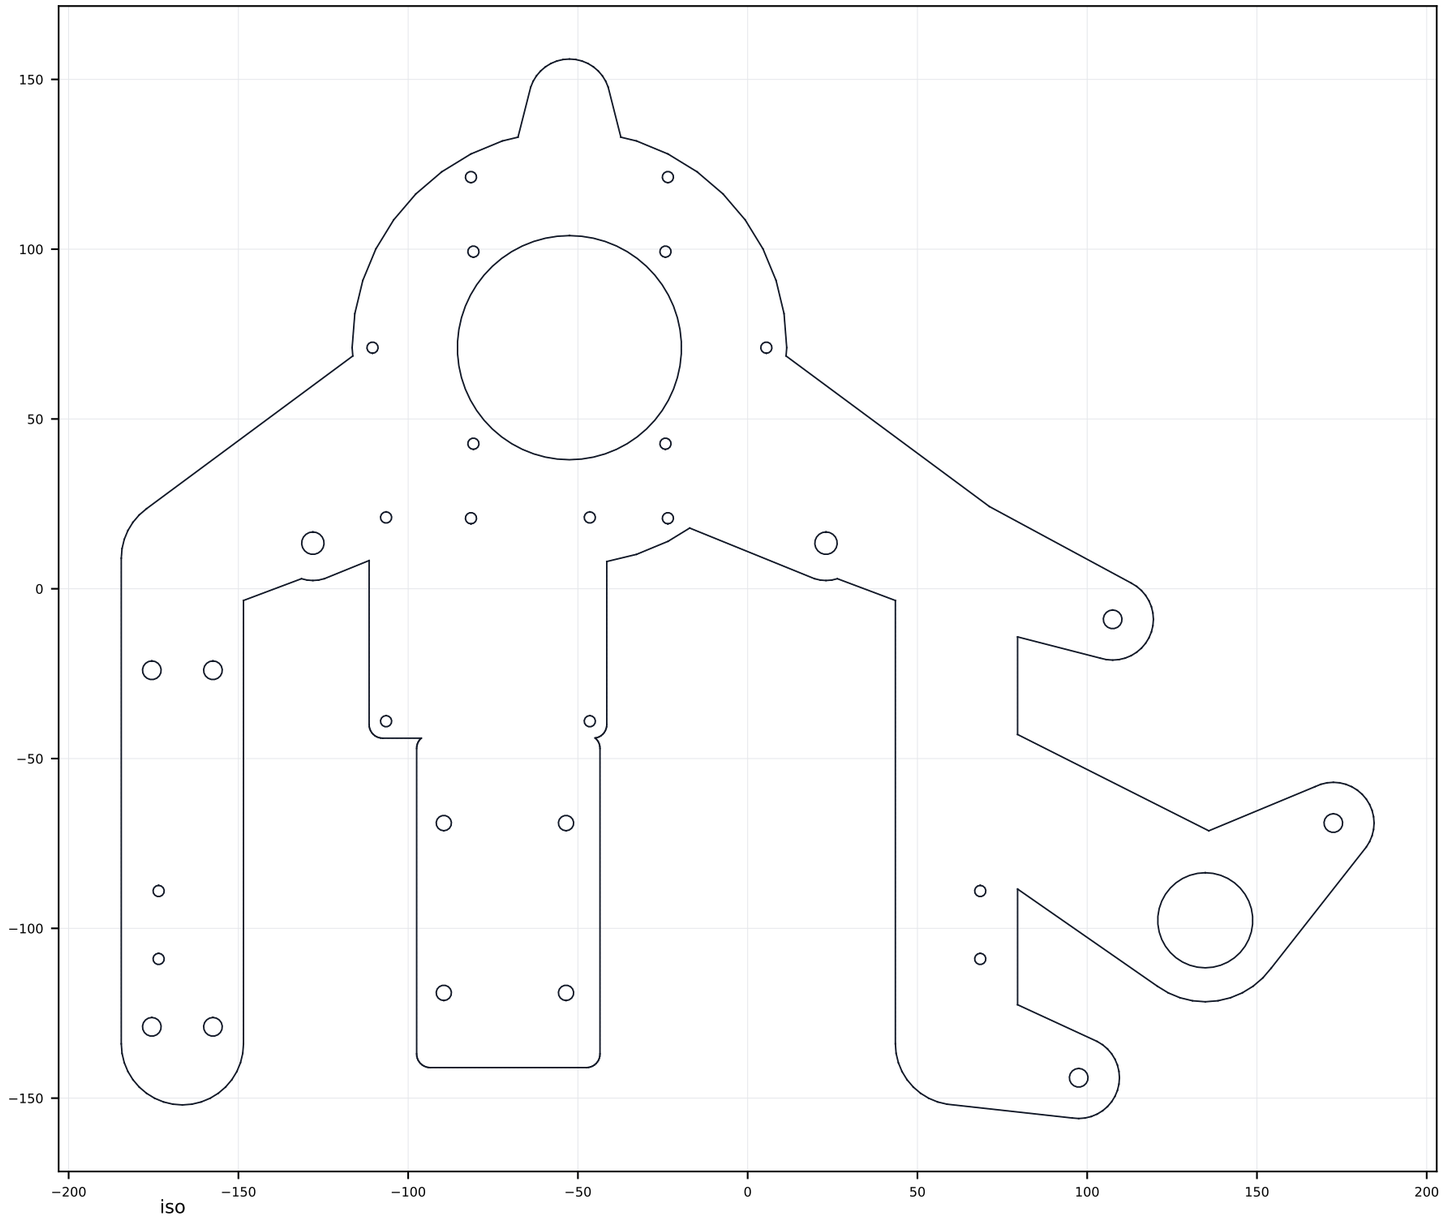


top (+z) (axes in mm from the view origin)



side (+x) (axes in mm from the view origin)

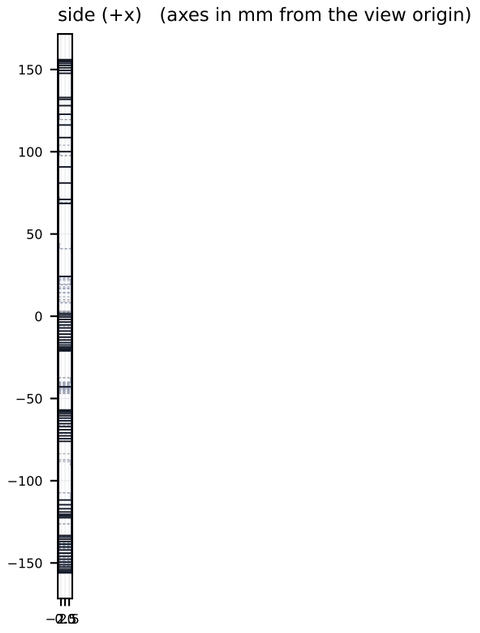

iso

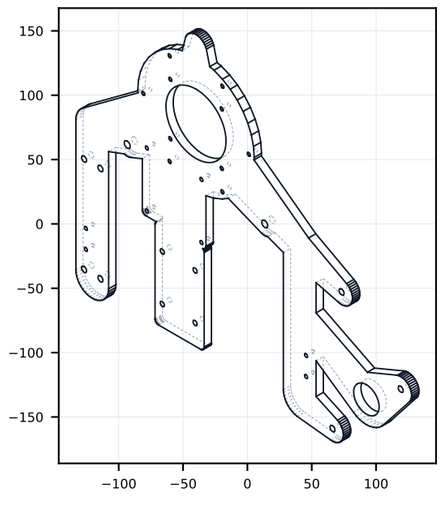

DRAWING hanger
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6 plate 8 mm
process: waterjet + CNC (bores, tapped holes)
finish: clear anodise
mass: 911.8 g overall: 369.0 x 8.0 x 312.0 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/hanger.step
view origin = bounding-box centre = robot (52.50, 31.00, -71.00)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 8.0 deep (drill 3.3)	-173.50	-10.00	-109.00	+y
M4 tapped 8.0 deep (drill 3.3)	-173.50	-10.00	-89.00	+y
M4 tapped 8.0 deep (drill 3.3)	-110.50	14.00	71.00	-y
M4 tapped 8.0 deep (drill 3.3)	-106.50	-8.00	-39.00	+y
M4 tapped 8.0 deep (drill 3.3)	-106.50	-8.00	21.00	+y
M4 tapped 8.0 deep (drill 3.3)	-81.50	14.00	20.77	-y
M4 tapped 8.0 deep (drill 3.3)	-81.50	14.00	121.23	-y
M4 tapped 8.0 deep (drill 3.3)	-80.78	8.50	42.72	-y
M4 tapped 8.0 deep (drill 3.3)	-80.78	8.50	99.28	-y
M4 tapped 8.0 deep (drill 3.3)	-46.50	-8.00	-39.00	+y
M4 tapped 8.0 deep (drill 3.3)	-46.50	-8.00	21.00	+y
M4 tapped 8.0 deep (drill 3.3)	-24.22	8.50	42.72	-y
M4 tapped 8.0 deep (drill 3.3)	-24.22	8.50	99.28	-y
M4 tapped 8.0 deep (drill 3.3)	-23.50	14.00	20.77	-y
M4 tapped 8.0 deep (drill 3.3)	-23.50	14.00	121.23	-y
M4 tapped 8.0 deep (drill 3.3)	5.50	14.00	71.00	-y
M4 tapped 8.0 deep (drill 3.3)	68.50	-10.00	-109.00	+y
M4 tapped 8.0 deep (drill 3.3)	68.50	-10.00	-89.00	+y
d4.5 through	-89.50	4.00	-119.00	-y
d4.5 through	-89.50	4.00	-69.00	-y
d4.5 through	-53.50	4.00	-119.00	-y
d4.5 through	-53.50	4.00	-69.00	-y
d5.5 through	-175.50	-4.00	-129.00	+y
d5.5 through	-175.50	-4.00	-24.00	+y
d5.5 through	-157.50	-4.00	-129.00	+y
d5.5 through	-157.50	-4.00	-24.00	+y

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d5.5 through	97.50	-4.00	-144.00	+y
d5.5 through	107.50	-4.00	-9.00	+y
d5.5 through	172.50	-4.00	-69.00	+y
d6.6 through	-128.07	-4.00	13.43	+y
d6.6 through	23.07	-4.00	13.43	+y