


side (+x) (axes in mm from the view origin)

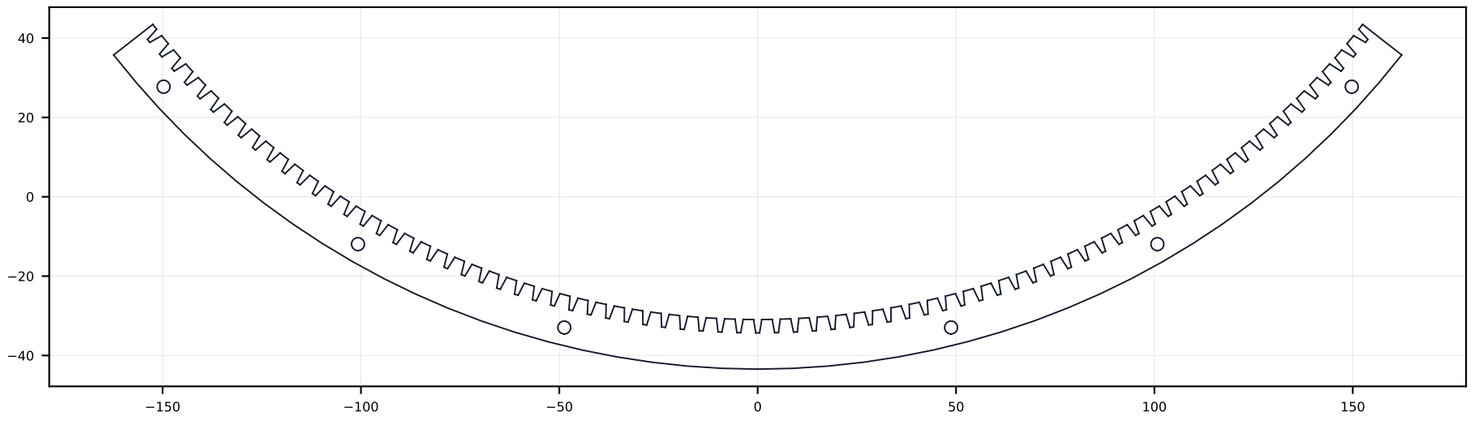


top (+z) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)



iso

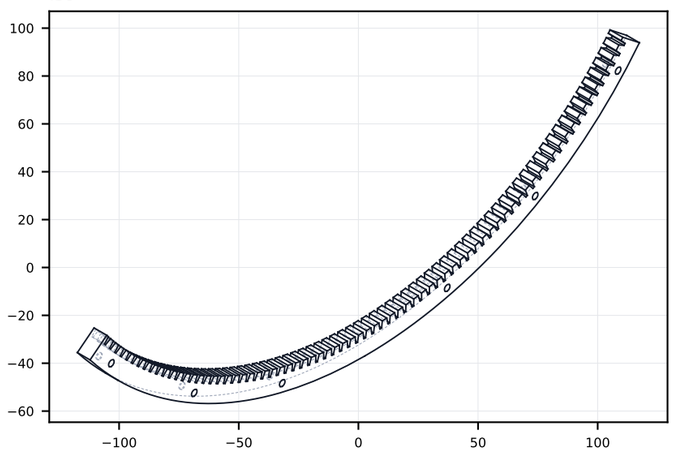

DRAWING lean_rack
qty per robot: 1
material: 7075-T6
process: wire EDM
finish: hard anodise
mass: 86.4 g overall: 7.5 x 324.7 x 86.9 mm (x, y, z)
note: internal m1.5 z260 segment +-52 deg
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/lean_rack.step
view origin = bounding-box centre = robot (72.75, -0.00, -162.56)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 7.5 deep (drill 3.3)	22.25	-149.74	27.73	-x
M4 tapped 7.5 deep (drill 3.3)	22.25	-100.75	-11.94	-x
M4 tapped 7.5 deep (drill 3.3)	22.25	-48.75	-32.95	-x
M4 tapped 7.5 deep (drill 3.3)	22.25	48.75	-32.95	-x
M4 tapped 7.5 deep (drill 3.3)	22.25	100.75	-11.94	-x
M4 tapped 7.5 deep (drill 3.3)	22.25	149.74	27.73	-x