


top (+z) (axes in mm from the view origin)

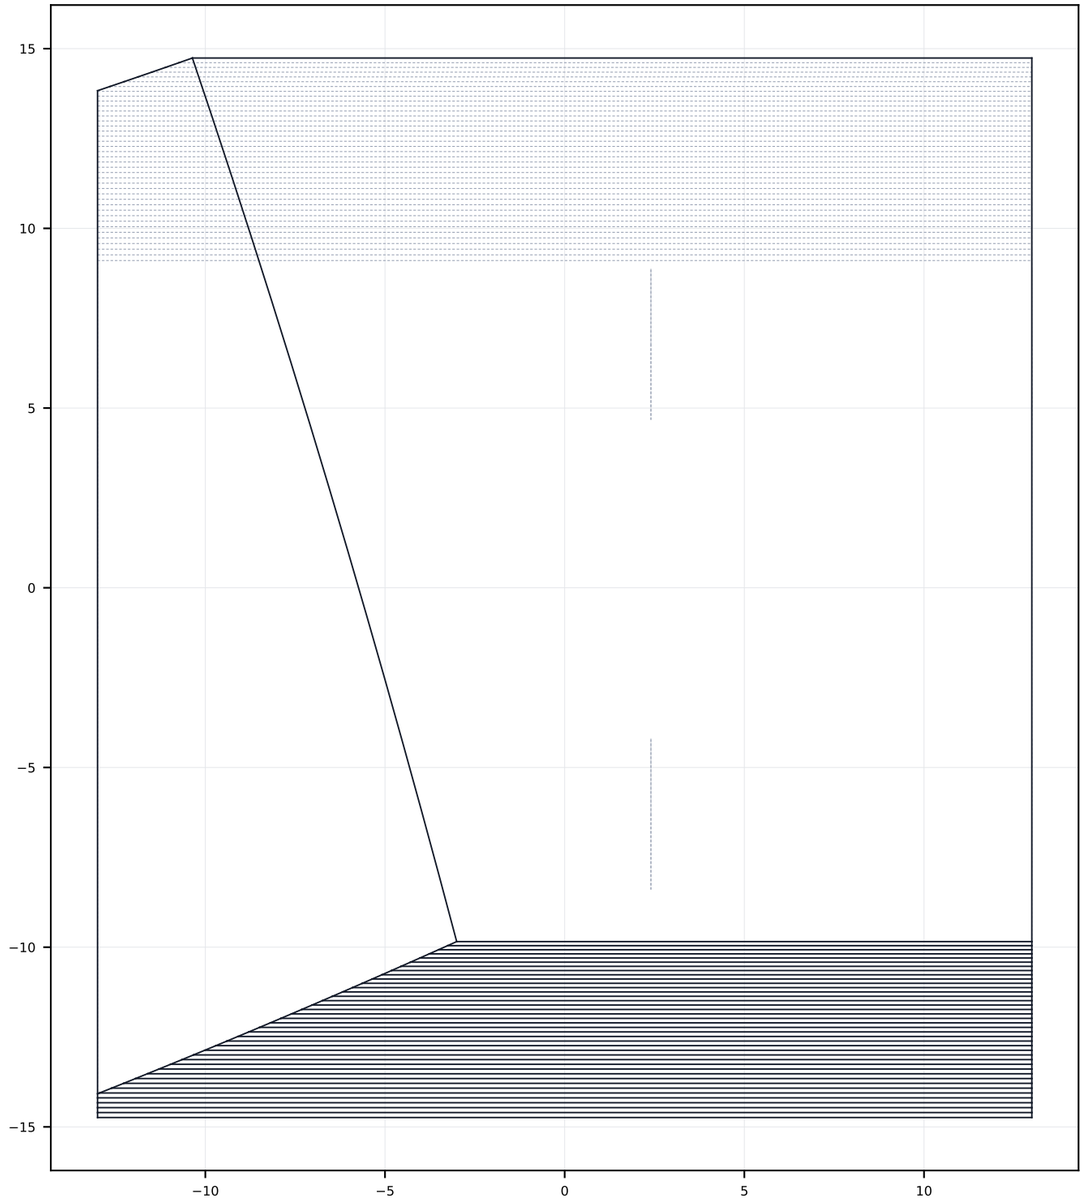


side (+x) (axes in mm from the view origin)

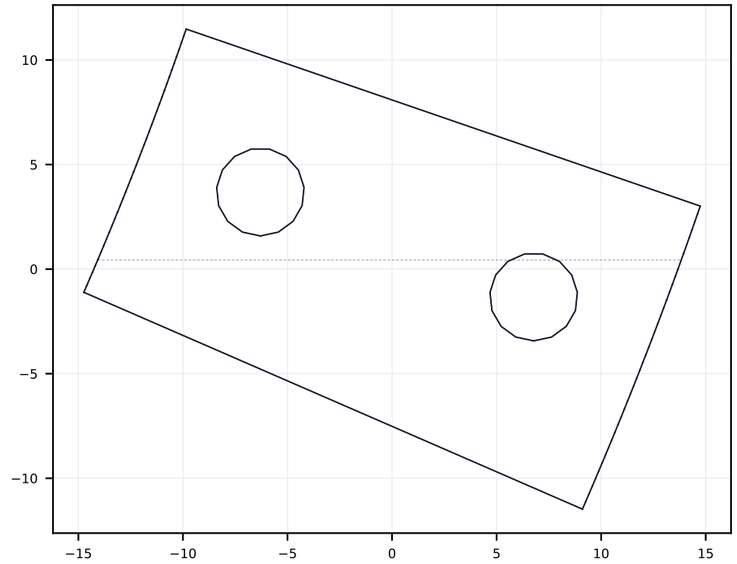

front (-y) (axes in mm from the view origin)

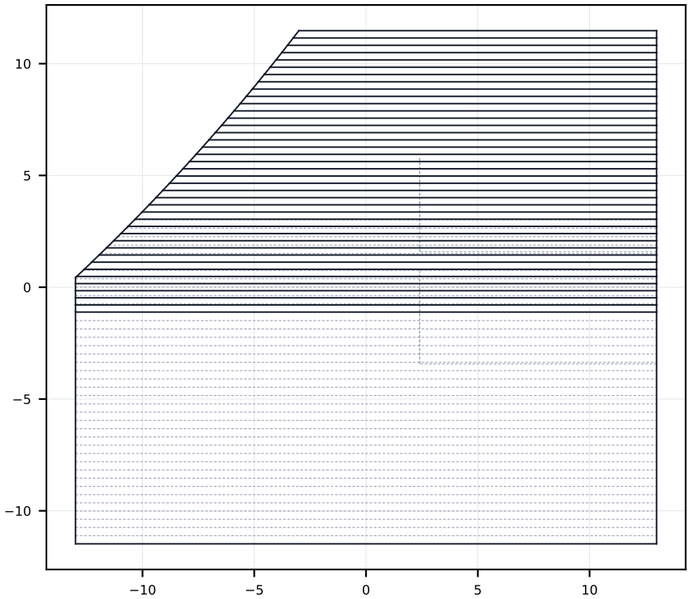

iso

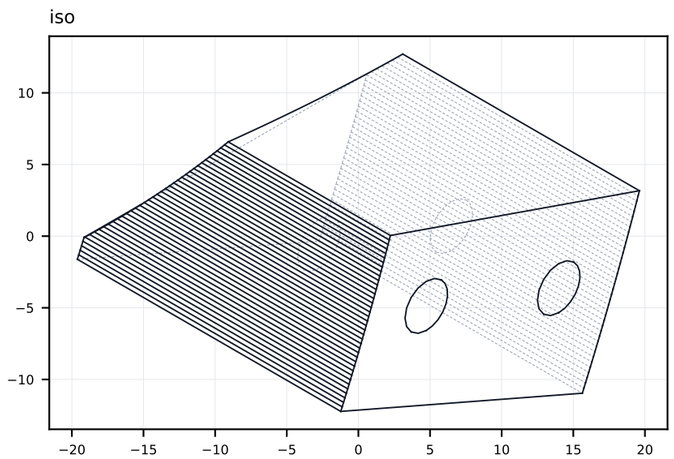

DRAWING lean_stop
qty per robot: 4 (R-hand part = this one mirrored about XZ)
material: 6061-T6
process: CNC
finish:
mass: 23.8 g overall: 26.0 x 29.5 x 23.0 mm (x, y, z)
note: 3 mm PU 90A pad bonded on the face toward the carriage
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/lean_stop.step
view origin = bounding-box centre = robot (76.00, 172.47, -67.48)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M5 tapped 10.6 deep (drill 4.2)	19.00	-6.30	3.69	-x
M5 tapped 10.6 deep (drill 4.2)	19.00	6.77	-1.33	-x