


front (-y) (axes in mm from the view origin)

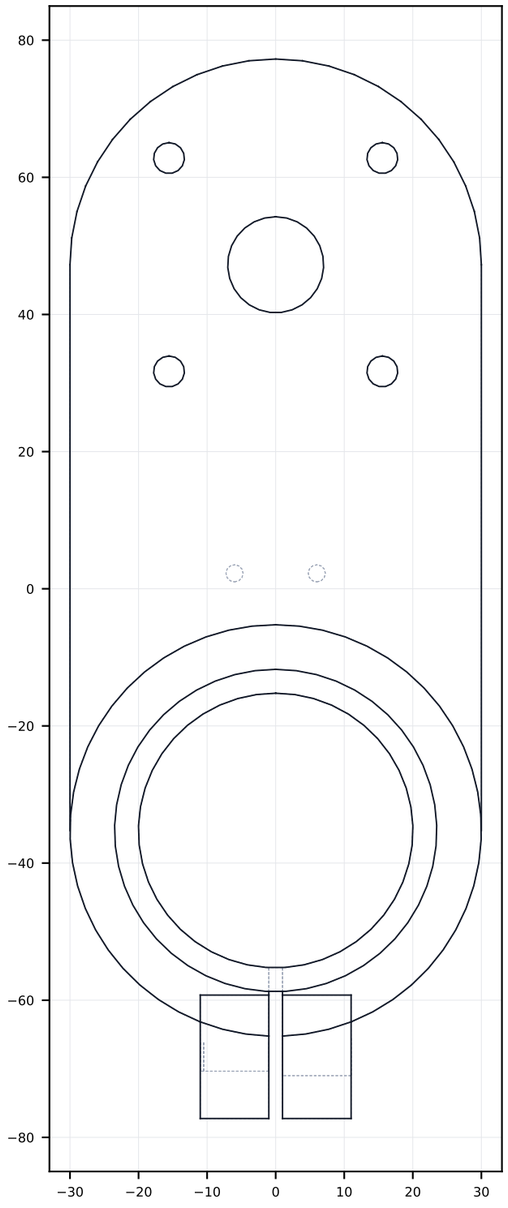


side (+x) (axes in mm from the view origin)

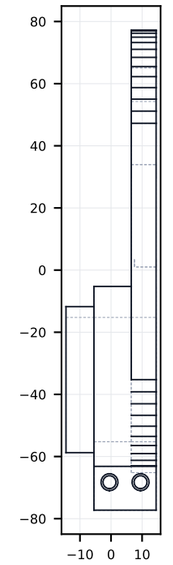

top (+z) (axes in mm from the view origin)

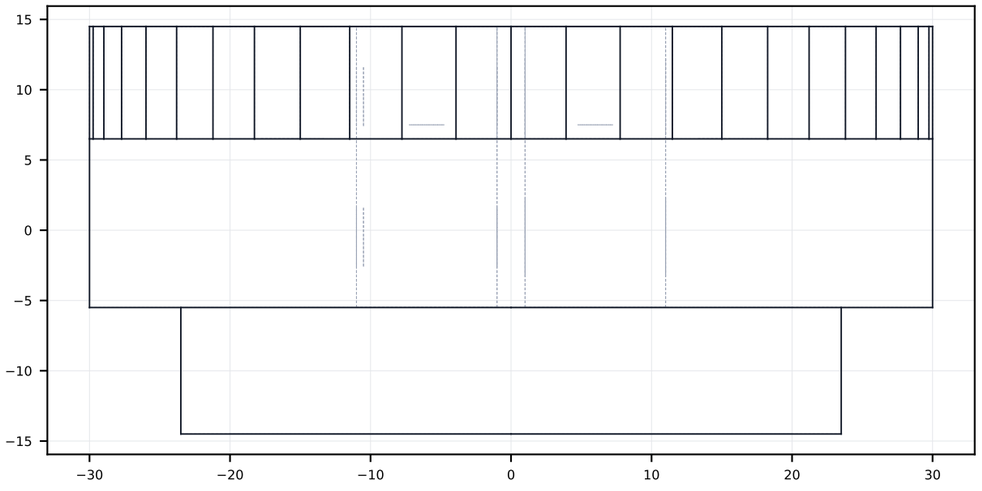

iso

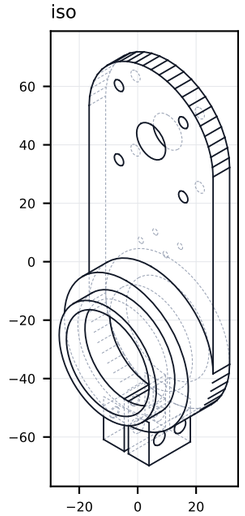

DRAWING level_bracket
qty per robot: 1
material: 6061-T6
process: CNC
finish: clear anodise
mass: 208.9 g overall: 60.0 x 29.0 x 154.5 mm (x, y, z)
note: split clamp locates the left inner race; arm carries the levelling motor
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/level_bracket.step
view origin = bounding-box centre = robot (0.00, 51.50, 35.25)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M3 tapped 7.0 deep (drill 2.5)	-6.00	17.50	2.25	-y
M3 tapped 7.0 deep (drill 2.5)	6.00	17.50	2.25	-y
M5 tapped 10.0 deep (drill 4.2)	11.00	-0.50	-68.25	-x
M5 tapped 10.0 deep (drill 4.2)	11.00	9.50	-68.25	-x
d4.5 through	-15.56	6.50	31.69	+y
d4.5 through	-15.56	6.50	62.81	+y
d4.5 through	15.56	6.50	31.69	+y
d4.5 through	15.56	6.50	62.81	+y
d5.5 through	11.00	-0.50	-68.25	-x
d5.5 through	11.00	9.50	-68.25	-x