


front (-y) (axes in mm from the view origin)

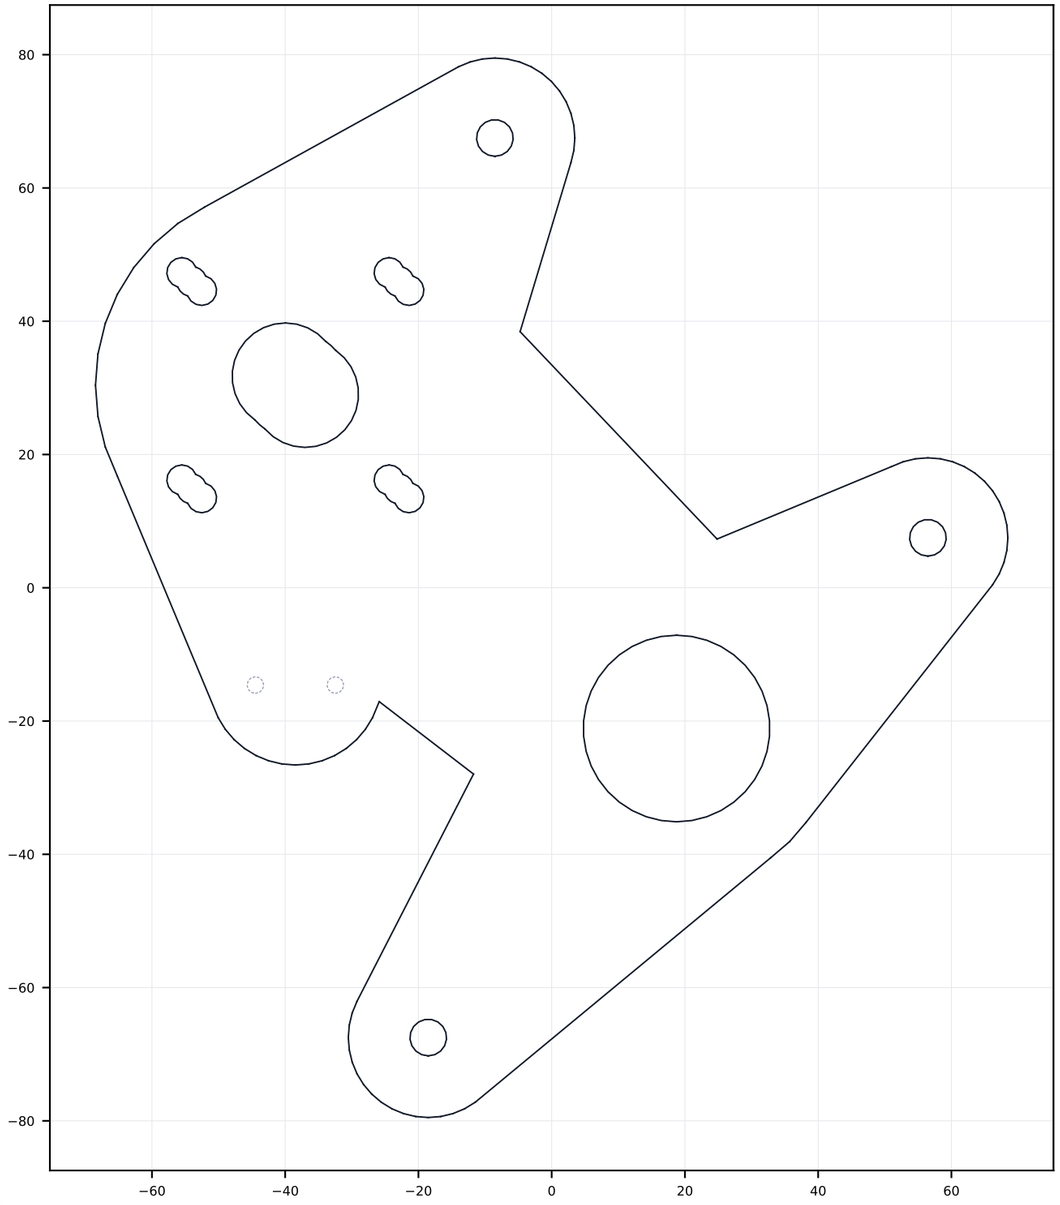


side (+x) (axes in mm from the view origin)



top (+z) (axes in mm from the view origin)



iso

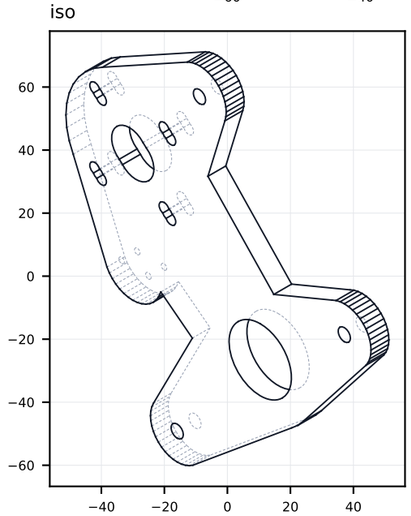

DRAWING outer_plate
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6 plate 8 mm
process: waterjet + CNC
finish:
mass: 200.7 g overall: 136.9 x 8.0 x 159.0 mm (x, y, z)
note: motor holes slotted +-2 mm for belt tension
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/outer_plate.step
view origin = bounding-box centre = robot (168.53, 80.00, -147.50)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M3 tapped 7.0 deep (drill 2.5)	-44.48	7.00	-14.60	-y
M3 tapped 7.0 deep (drill 2.5)	-32.48	7.00	-14.60	-y
d4.5 through	-54.03	-4.00	14.85	+y
d4.5 through	-54.03	-4.00	45.96	+y
d4.5 through	-22.92	-4.00	14.85	+y
d4.5 through	-22.92	-4.00	45.96	+y
d5.5 through	-18.53	4.00	-67.50	-y
d5.5 through	-8.53	4.00	67.50	-y
d5.5 through	56.47	4.00	7.50	-y