top (+z) (axes in mm from the view origin)

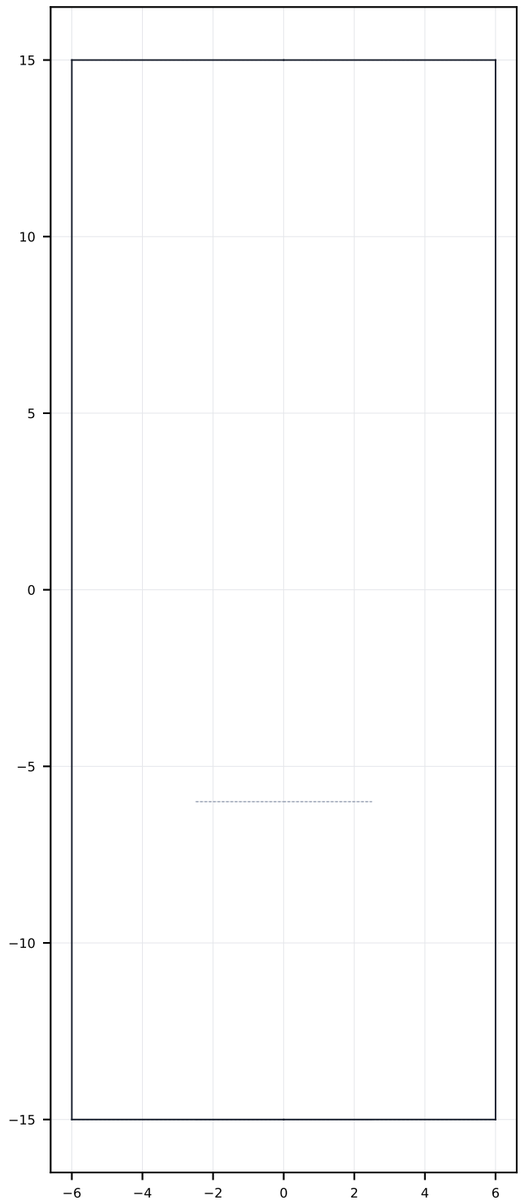

side (+x) (axes in mm from the view origin)

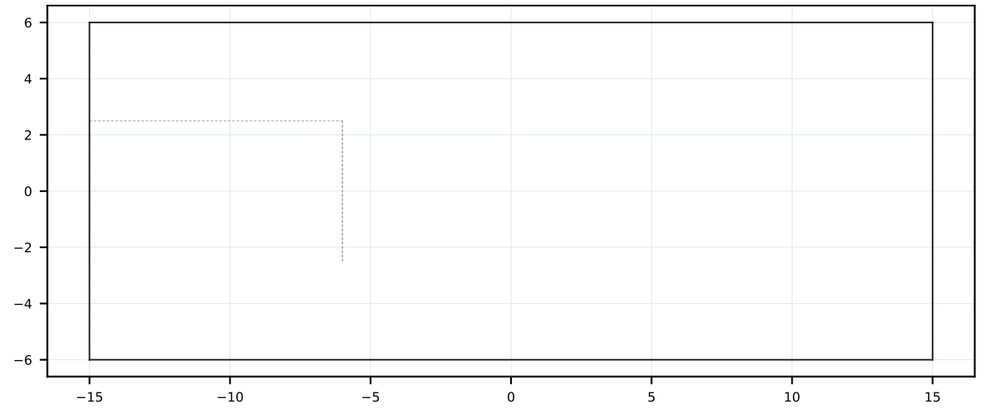

front (-y) (axes in mm from the view origin)

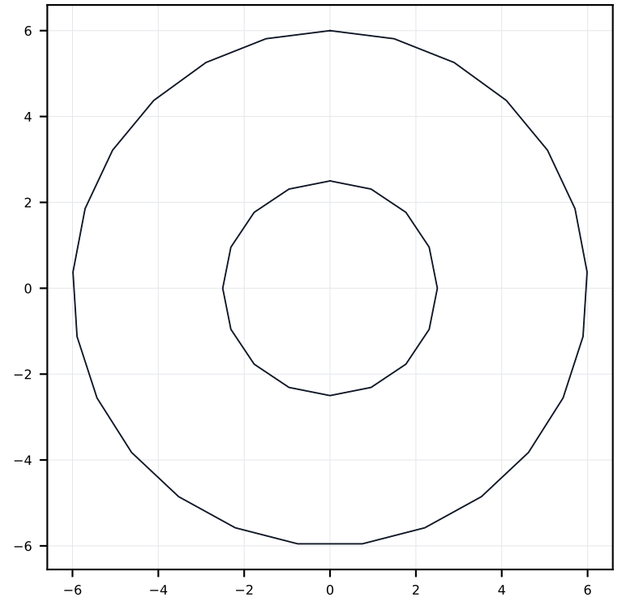

iso

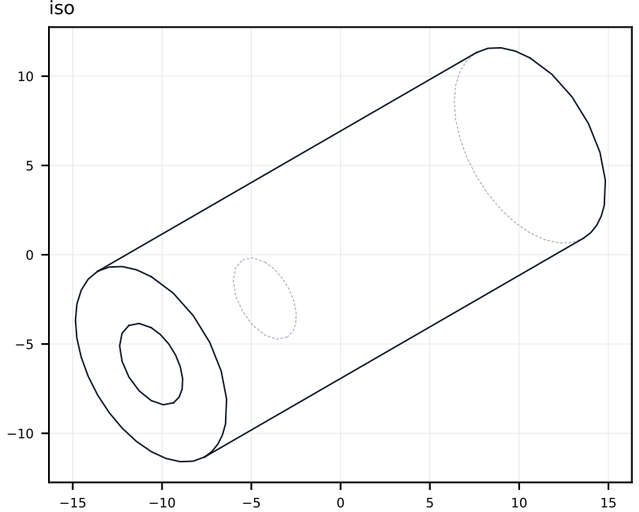

DRAWING pitch_striker
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: C45 (1045) steel d12, zinc plated
process: turned 30 long, M6 tapped 14 deep
finish:
mass: 25.2 g overall: 12.0 x 30.0 x 12.0 mm (x, y, z)
note: meets the level-bracket arm flank at 102 deg yoke-to-spine pitch
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/pitch_striker.step
view origin = bounding-box centre = robot (75.57, 50.00, -57.57)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M6 tapped 9.0 deep (drill 5.0)	0.00	-23.00	-0.00	+y