


front (-y) (axes in mm from the view origin)

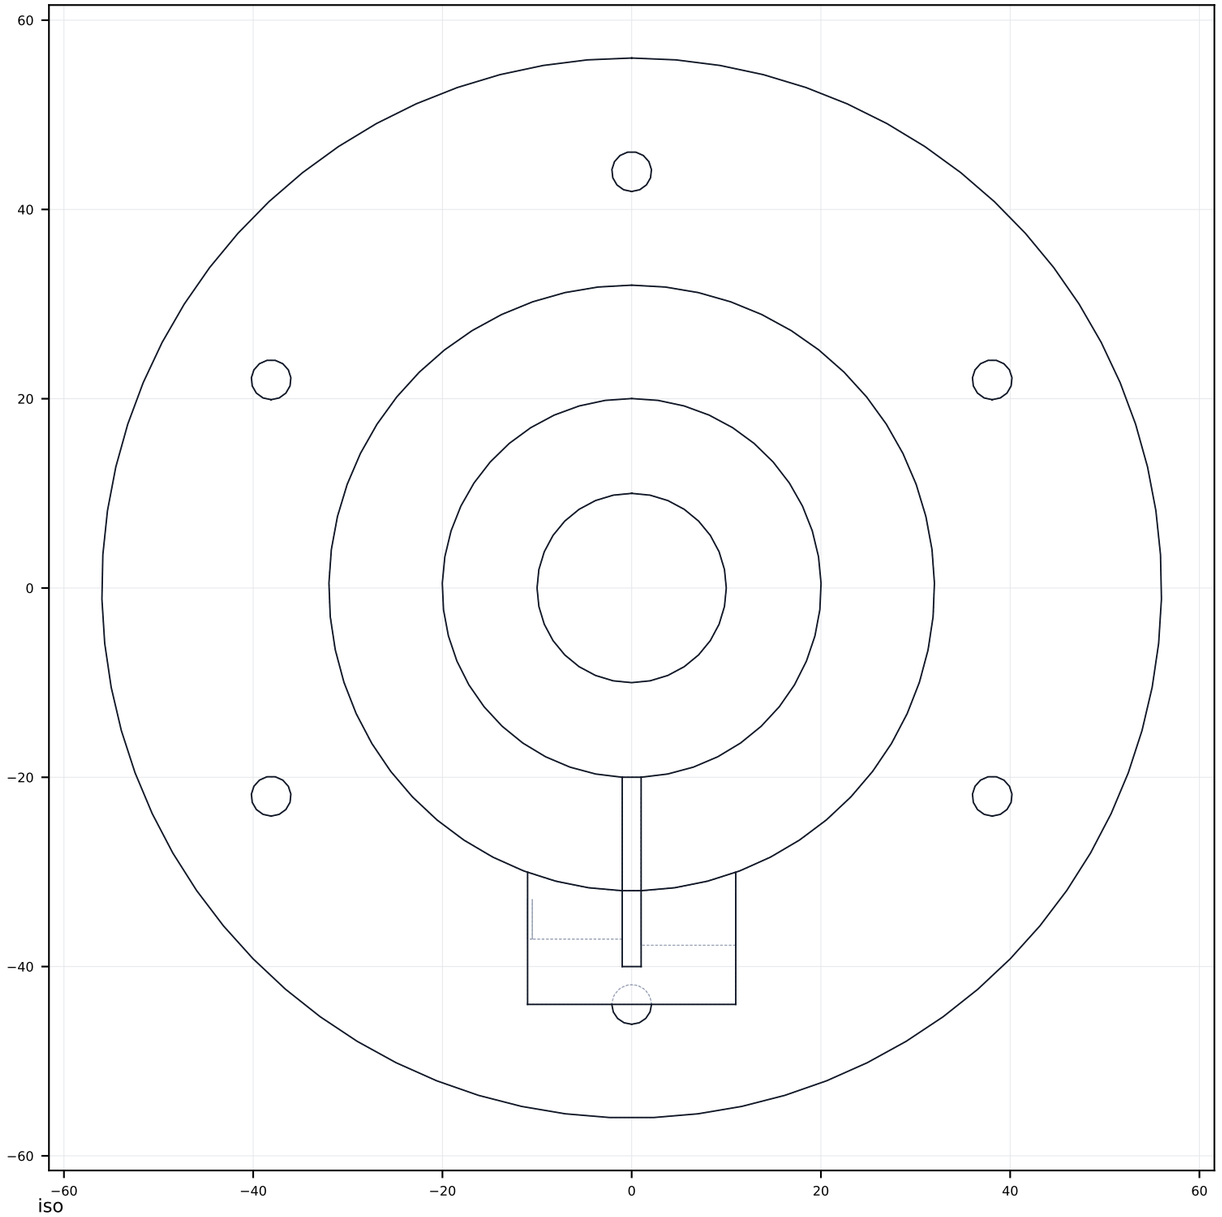


top (+z) (axes in mm from the view origin)

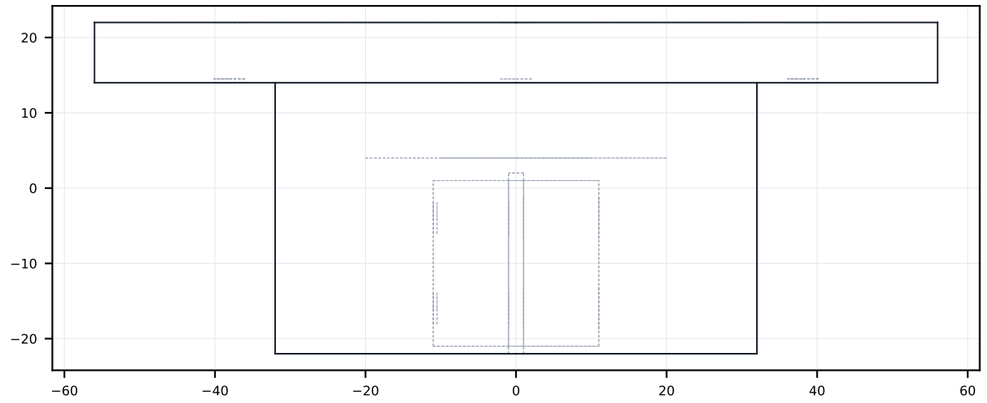

side (+x) (axes in mm from the view origin)

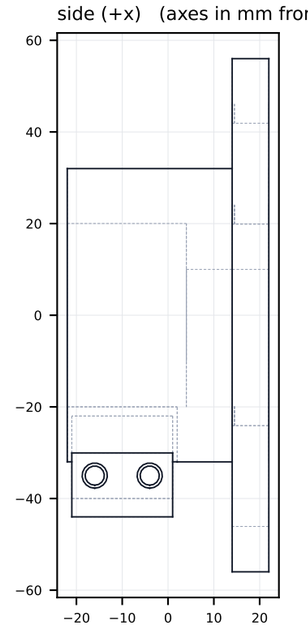

iso

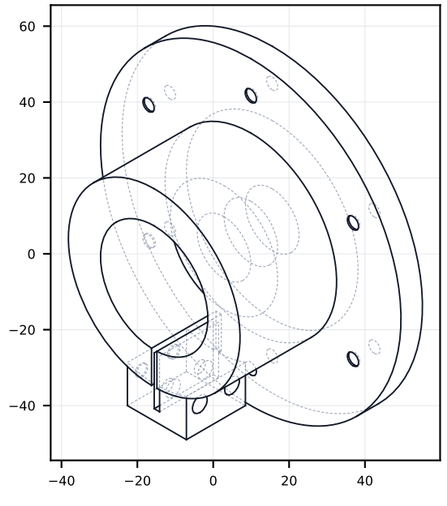

DRAWING pod_hub
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6
process: CNC mill-turn
finish: clear anodise
mass: 432.0 g overall: 112.0 x 44.0 x 112.0 mm (x, y, z)
note: bore 40 H7, slit clamp
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/pod_hub.step
view origin = bounding-box centre = robot (0.00, 308.00, 0.00)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M5 tapped 10.0 deep (drill 4.2)	11.00	-16.00	-35.00	-x
M5 tapped 10.0 deep (drill 4.2)	11.00	-4.00	-35.00	-x
M5 tapped 10.6 deep (drill 4.2)	-0.00	30.00	-44.00	-y
M5 tapped 8.0 deep (drill 4.2)	-38.10	30.00	-22.00	-y
M5 tapped 8.0 deep (drill 4.2)	-38.10	30.00	22.00	-y
M5 tapped 8.0 deep (drill 4.2)	0.00	30.00	44.00	-y
M5 tapped 8.0 deep (drill 4.2)	38.10	30.00	-22.00	-y
M5 tapped 8.0 deep (drill 4.2)	38.10	30.00	22.00	-y
d5.5 through	11.00	-16.00	-35.00	-x
d5.5 through	11.00	-4.00	-35.00	-x