


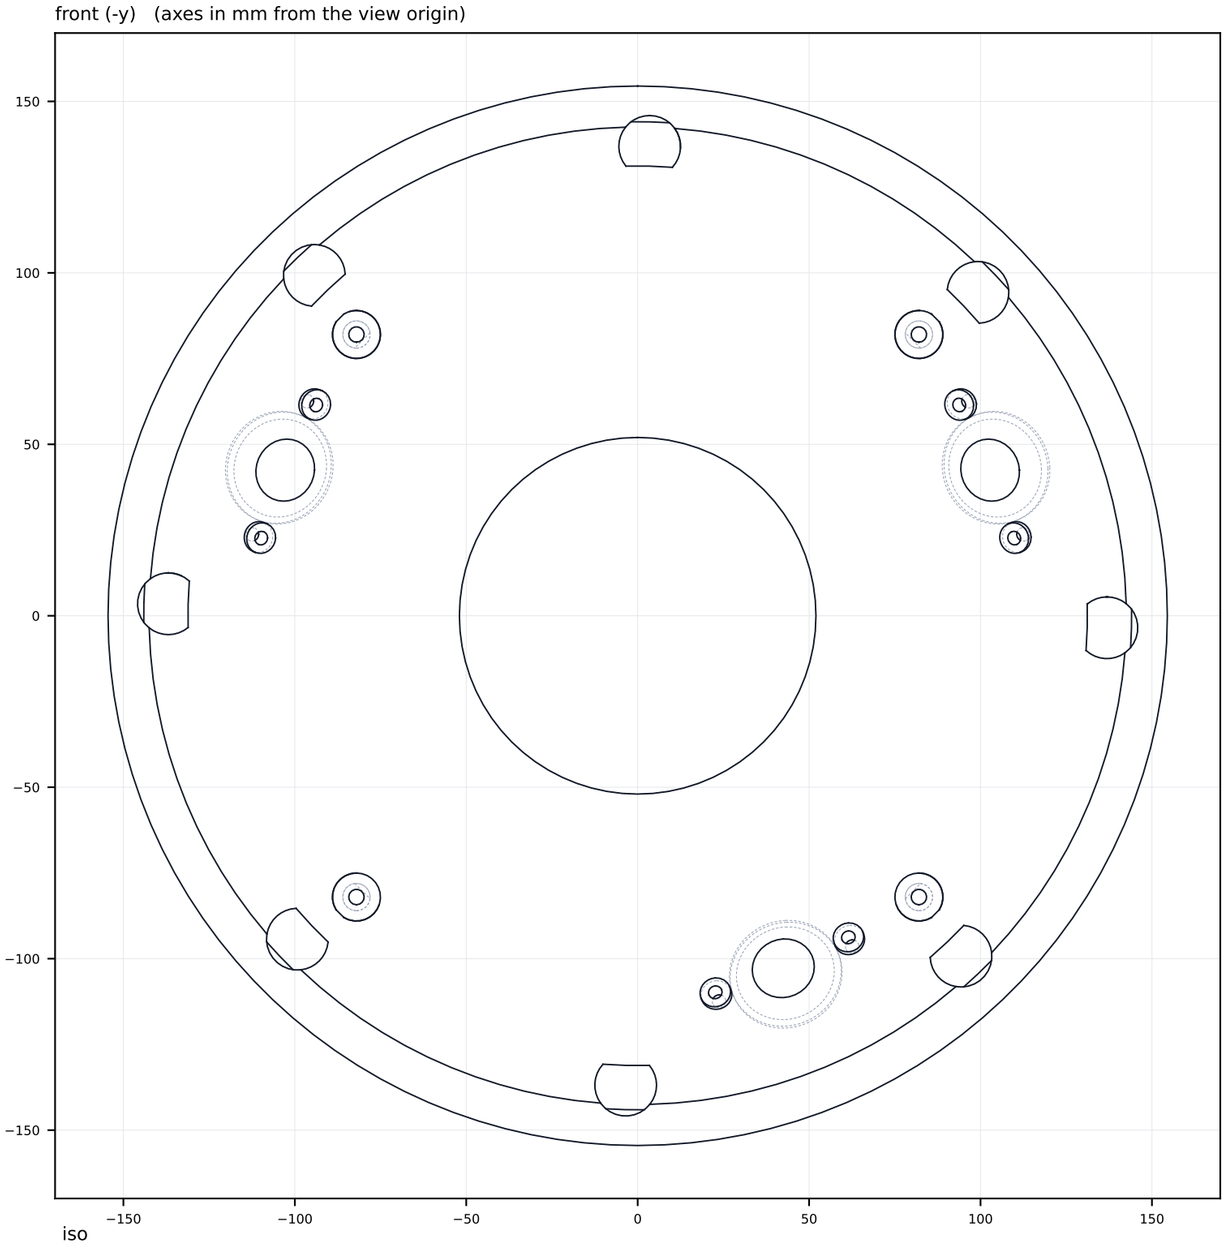


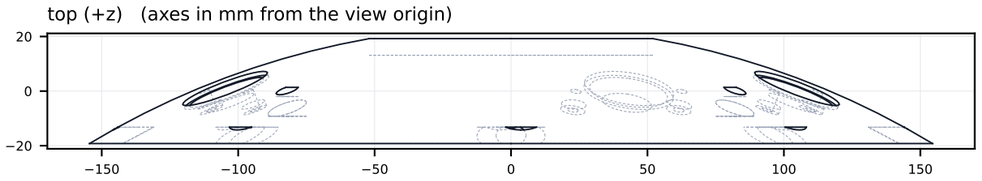

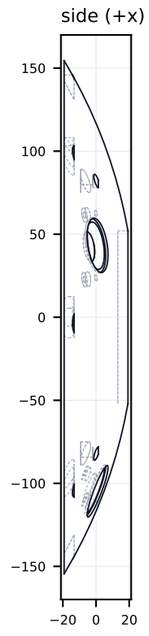

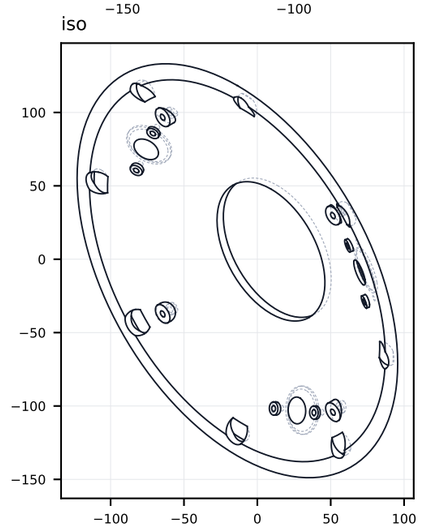

DRAWING pod_shield
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: PA12 (HP MJF), dyed black
process: MJF print
finish: bead blast + clear coat
mass: 384.0 g overall: 309.0 x 38.4 x 309.0 mm (x, y, z)
note: 4 x M4 button heads on spot faces into the standoffs; serviceable from outside
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/pod_shield.step
view origin = bounding-box centre = robot (-0.00, 365.22, 0.00)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
d4.0 x 7.4 for M3 heat-set insert	-108.06	-11.58	21.92	+y
d4.0 x 7.4 for M3 heat-set insert	-92.02	-11.58	60.74	+y
d4.0 x 7.4 for M3 heat-set insert	21.92	-11.58	-108.06	+y
d4.0 x 7.4 for M3 heat-set insert	60.74	-11.58	-92.02	+y
d4.0 x 7.4 for M3 heat-set insert	92.02	-11.58	60.74	+y
d4.0 x 7.4 for M3 heat-set insert	108.06	-11.58	21.92	+y
d4.5 through	-82.02	-2.00	-82.02	-y
d4.5 through	-82.02	-2.00	82.02	-y
d4.5 through	82.02	-2.00	-82.02	-y
d4.5 through	82.02	-2.00	82.02	-y